


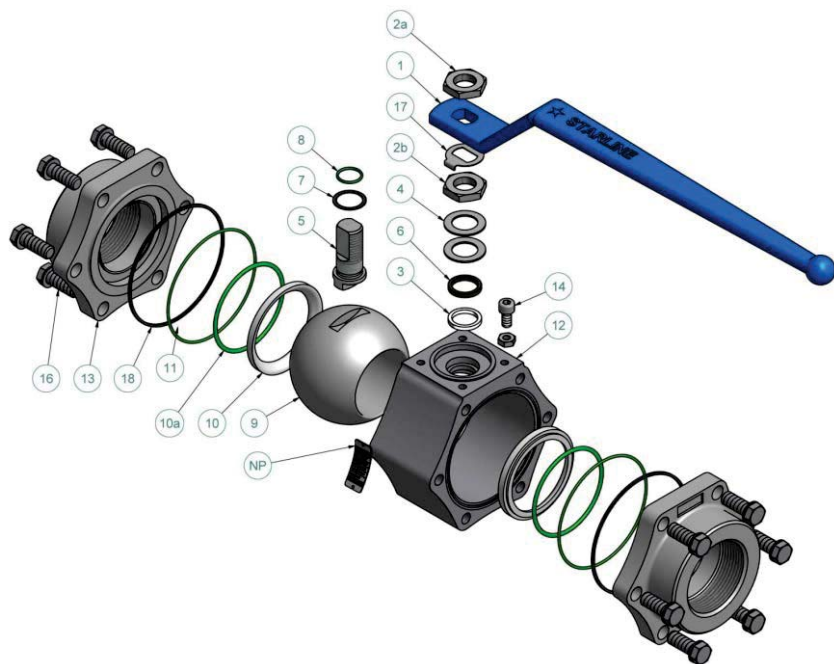

IT	QTY	PART NAME	MATERIAL
NP	1	Name Plate	F316
1	1	Handle	Carbon Steel + Epoxy Coated ¹⁾
2a	1	Handle nuts	F304
2b	1		
3	2	Packing ring	Graphite
4	2	Spring washers	F316 Treated
5	1	Antistatic stem	F316/F316L Dual Certified
6	1	Gland packing	F316
7	1	Thrust washer	PTFE
8	1	"O"ring stem	Viton
9	1	Ball	F316/F316L Dual Certified
10	2	Seats	RPTFE (Carbon/Graphite)
10a	2	Seat Gasket	Viton
11	2	1st Body seals	RPTFE (Carbon/Graphite)
12	1	Body	F316/F316L Dual Certified
13	2	End connections	F316/F316L Dual Certified
14	1	Stop-pin	F316
16	12	Bolts	A193 B8
17	1 ²⁾	Stop washer	F304
18	2	2nd Body seals	Graphite

1) Carbon Steel+Plastic for DN65 - 2½"

2) Qty 0 for DN65 - 2½"




Recommended Spare Parts for Start-Up or Commissioning

Construction

Floating ball
Full Bore
Soft Seat
3-piece construction
Antistatic Stem
Blow-out proof stem
Bidirectional
Double body seal
Triple stem seal
Encapsulated seats

General Features

PED Cat III Mod H
Firesafe
Atex II 2 GD
TA-Luft
ISO15848 Rate B
ISO5208 rate A
SIL 3
NACE MR0175/MR0103
Country of Origin: Italy

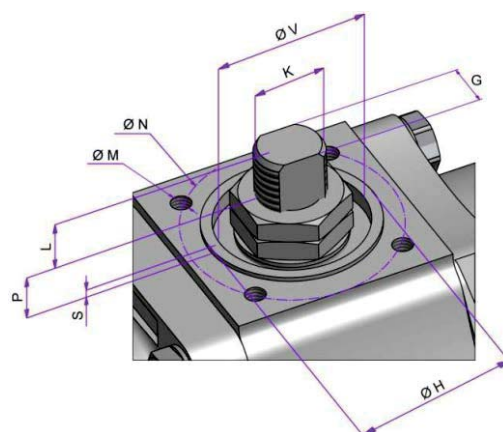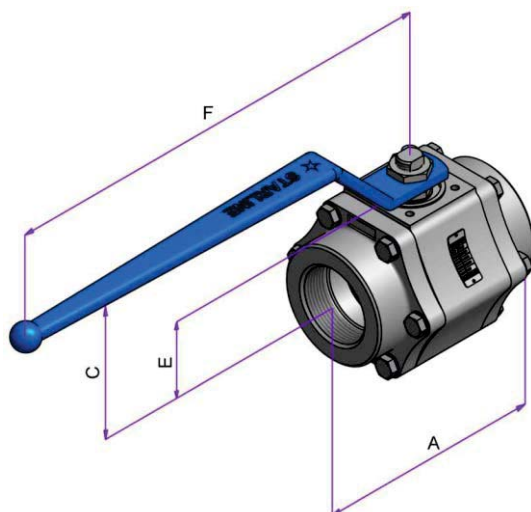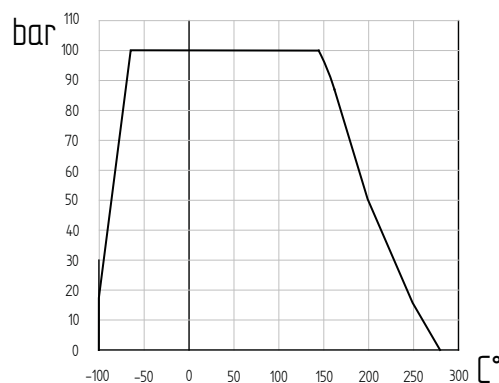

SIZE		DIMENSIONS [mm]						WEIGHT	TORQUE
DN		A	BORE	C	E	F		[kg]	[Nm]
50	2"	141	49	122	58,7	218		7	113
65	2½"	170	62	136	70	420		14	138

SIZE		DIMENSIONS [mm]										ISO5211
DN		L	P	S	V	K	G	H	N	M		
50	2"	12,5	12,5	1,5	30	M15x1,5	8,9	35	50	M6x10	F05	
65	2½"	17	18	1,5	48	M22x1,5	16	55	70	M8x12	F07	

Torque values have been measured ΔP at max rating at room temperature (It must be understood that many factors can influence the torque)

Dimensions and weights are subject to change without notice.

Face to face dimensions not listed in industry standards are subject to change without notice.