


## Wilo-Sub TWU 4-04.. -C

### Dimensioneringsdiagram

1~230 V och 3~400 V

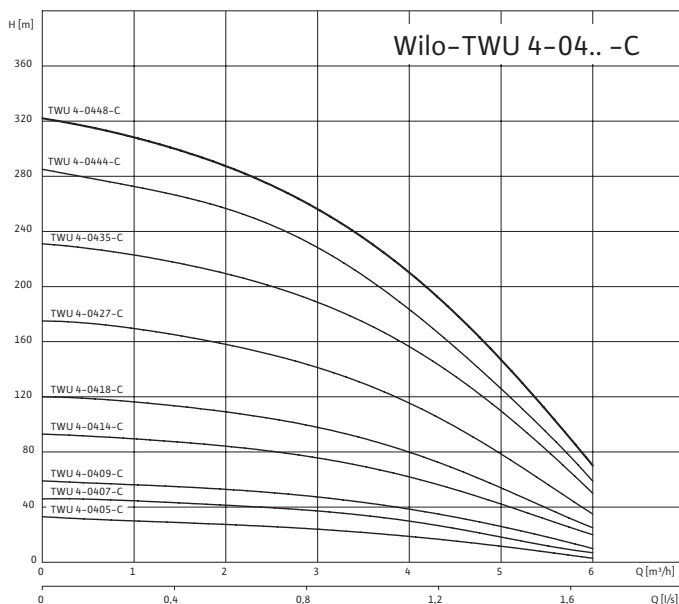

### Övriga pumpdata

Mediaterperatur	+3°C – +40°C
Kapslingsklass	IP 68
Isolationsklass	F


### Tillbehör

#### Montage

	Art.nr.	RSK
Vajerlås	2835516	588 45 91
Vajer /m	2835519	588 45 93
Vinterkoppling, G 25	2835518	588 45 92
Nippel G 32 utv x G 40 inv	2835247	588 46 16
Nippel G 32 utv x G 50 inv	2835248	588 46 17
Adapter G 25 (exkl. koppling)	2835517	588 46 10
Borrtopp	2835520	588 45 94
Motorskåp KMS (1,0-5,0 A)	2835149	595 50 81
Motorskåp KMS (3,2-16,0 A)	2835153	600 59 46

För Kabelsatser och tabell för val av kabeldimension hänvisas till kapitel "Automationstillbehör" på sidan 391.

### Måttuppgifter

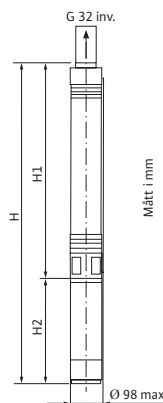

Pump TWU 4-	H1		H2		H	
	1~	3~	1~	3~	1~	3~
0405-C	257	212	197	469	454	
0407-C	301	227	212	528	513	
0409-C	344	257	227	601	571	
0414-C	452	302	257	754	709	
0418-C	538	337	302	875	840	
0427-C	767	392	337	1159	1104	
0435-C	934	-	442	-	1376	
0444-C	1128	-	517	-	1645	
0448-C	1253	-	517	-	1770	

### Motordata, vikt, artikel- och RSK-nummer

Pumptyp TWU 4... -C	Art.nr	RSK	Märkeffekt P <sub>2</sub> (kW)	Märkström 1~230 V (A)	Märkström 3~400 V (A)	Vikt (kg)	Kabeldimension mm <sup>2</sup>
TWU 4-0405 EM	6049337LV	585 22 95	0,37	3,4	-	9,5	4x1,5
TWU 4-0405 DM	6049348LV	585 23 24	0,37	-	1,2	8,5	
TWU 4-0407 EM	6049338LV	585 23 75	0,55	4,4	-	11,1	
TWU 4-0407 DM	6049349LV	585 23 90	0,55	-	1,7	10,0	
TWU 4-0409 EM	6049339LV	585 23 76	0,75	5,9	-	13,9	
TWU 4-0409 DM	6049350LV	585 23 91	0,75	-	2,2	11,6	
TWU 4-0414 EM	6049340LV	585 23 77	1,1	7,8	-	15,3	
TWU 4-0414 DM	6049351LV	585 23 92	1,1	-	3,0	15,0	
TWU 4-0418 EM	6049341LV	585 23 78	1,5	10,2	-	18,7	
TWU 4-0418 DM	6049352LV	585 23 93	1,5	-	4,0	16,1	
TWU 4-0427 EM	6049342LV	585 23 79	2,2	15,0	-	22,6	
TWU 4-0427 DM	6049353LV	585 23 94	2,2	-	5,6	20,4	
TWU 4-0435 DM	6049354LV	585 23 30	3,0	-	7,5	26,2	
TWU 4-0444 DM	6049355LV	585 23 31	4,0	-	10,1	32,7	
TWU 4-0448 DM	6049356LV	585 23 32	4,0	-	10,1	33,3	