

Customer	Date	2015-11-05
Contact	Project	
Phone number	Project no.	
Email		

5SV09T015T

RSK 5882991

1016LC860

Operating data

Pumpe type	Single head pump	Fluid	Water, pure
No. of pumps / Reserve	1 / 0	Operating temperature t A	°C 4
Nominal flow	m³/h 0	pH-value at t A	7
Nominal head	m 0	Density at t A	kg/dm³ 1
Static head	m 0	Kin. viscosity at t A	mm²/s 1,569
Inlet pressure	bar 0,098	Vapor pressure at t A	bar 0,0234
Environmental temperature	°C 20	Solids	0
Available system NPSH	m 0	Altitude	m 1000

Pump data

Make	Low ara	Nominal	m³/h ()
Speed	1/min 2900	Max-	m³/h 8,5
Number of stages	9	Min-	m³/h
Max. casing pressure	bar	Nominal	m
Max. working pressure	bar 6,7	Head at Qmax	m 29,5
Head H(Q=0)	m 68	Head at Qmin	m 68
Weight	kg 26	Shaft power	kW ()
Max.	mm 76	Max. shaft power	kW 1,3
Impeller R designed	mm 76	Efficiency	%
Min.	mm 76	NPSH 3%	m

Pump Materials

Pump body	Stainless steel / AISI 304
impeller	Stainless steel / AISI 304
Diffuser	Stainless steel / AISI 304
Outer sleeve	Stainless steel / AISI 304
Shaft	Stainless steel / AISI 304
Adapter	Cast iron
Coupling	Aluminium
Seal casing	Stainless steel / AISI 304
Elastomers	EPDM
Coupling protection	Stainless steel / AISI 304
Shaft sleeve and bushing	Tungsten carbide
Fill / drain plugs	Stainless steel / AISI 304
Base	Aluminium
Wear ring	Technopolymer PPS
Tie rods	Stainless steel

Shaft Seal

Single seal	Roten
SV - Uniten	
Rotating Assembly	Q1-Silicon carbide
Fixed Assembly	B-Resin impregnated carbon
Elastomers	E - EPDM
Springs	G-AISI 316
Other Components	G-AISI 316

Motor data

Manufacturer	Low ara	Electric voltage	400 V	Speed	2885 1/min	Insulation class	F
Specific design	IE3 Three phase surface motor			Frame size	90	Colour	RAL 5010
Type	PLM90.../315 E3	Electric current	2,95 A				
Rated power	1,5 kW	Degree of protection	IP 55				

Remarks:


Customer	Date	2015-11-05
Contact	Project	
Phone number	Project no.	
Email		

5SV09T015T 1016LC860

Hydraulic data

Operating Data Specification		Hydraulic data (duty point)		Impeller design	
Flow	0 m³/h	Flow		Impeller R	76 mm
Head	0 m	Head		Frequency	50 Hz
Static head	0 m	MEI >= 0,7		Speed	2900 1/min


Power datas referred to:
Water, pure [100%] ; 4°C; 1kg/dm³; 1,57mm²/s
Performance according to ISO 9906 - Annex A

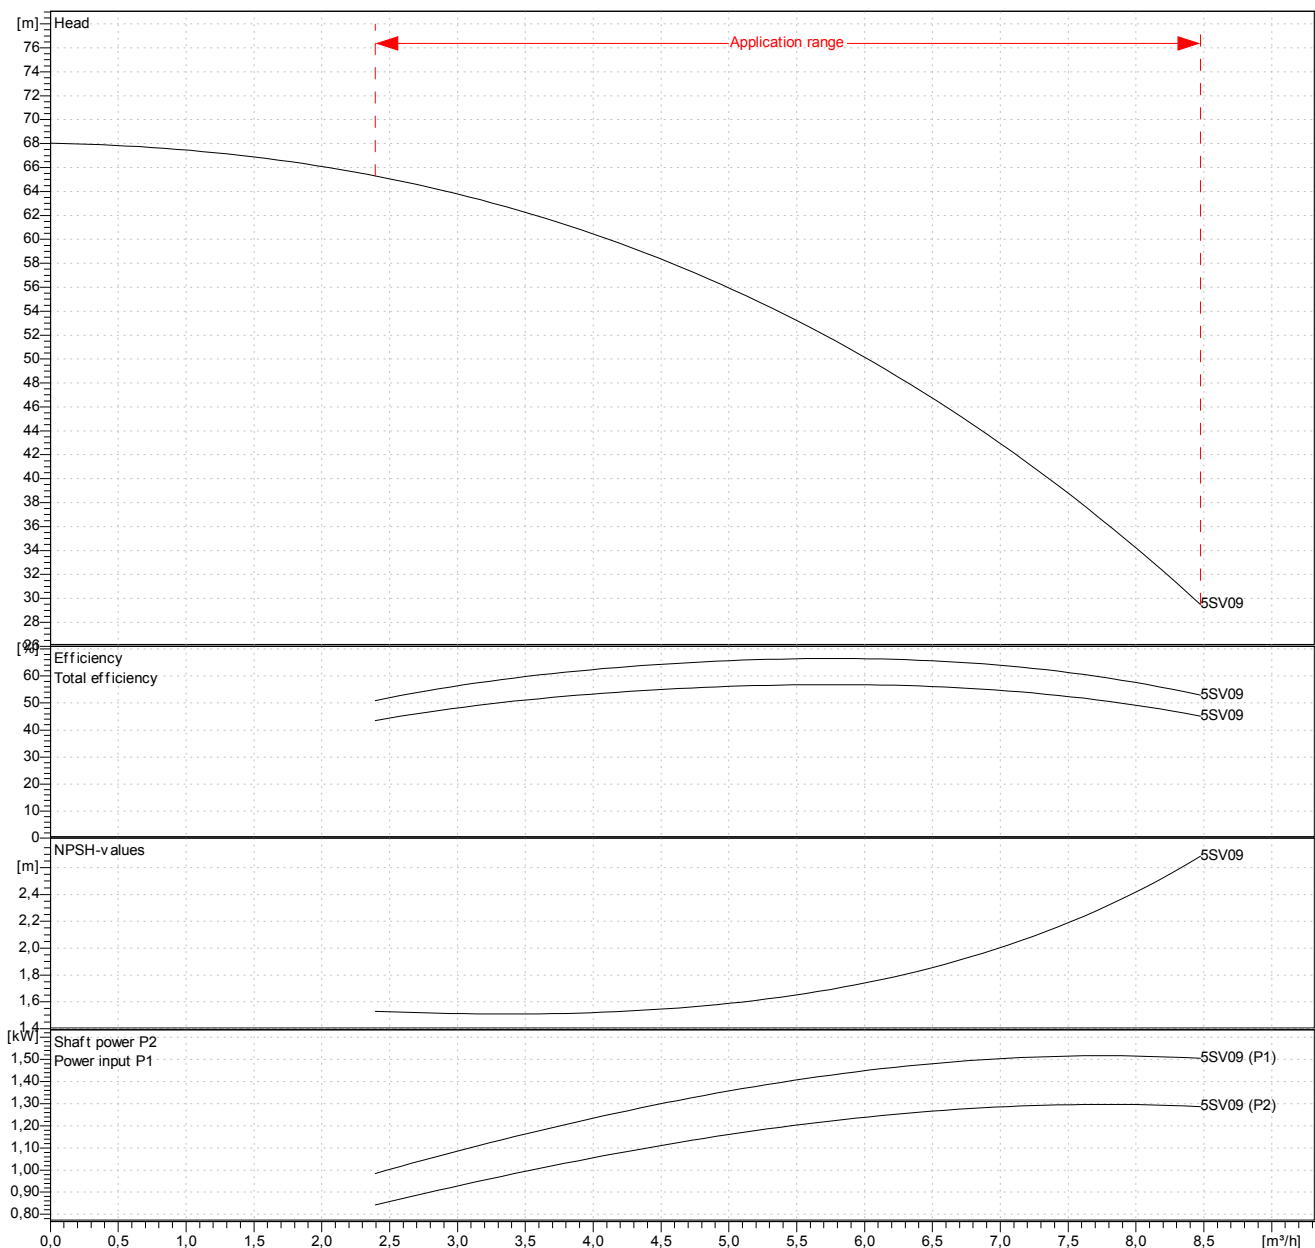

Customer	Date	2015-11-05
Contact	Project	
Phone number	Project no.	
Email		

5SV09T015T
1016LC860

Drawing

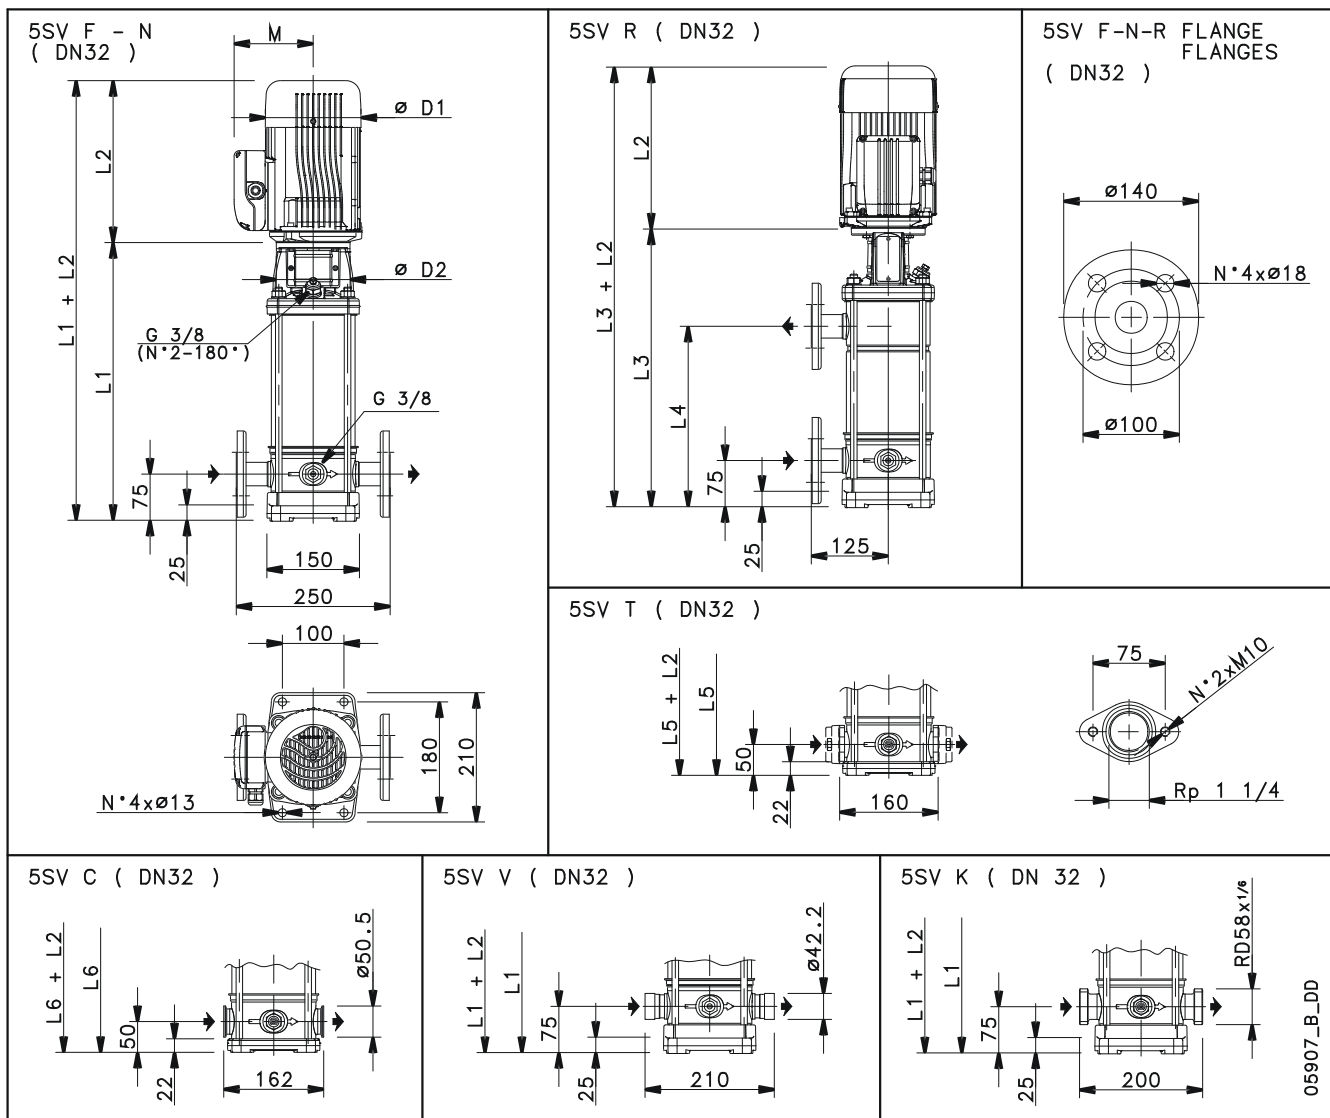

Dimensions mm

D1	155					Weight 26 kg
D2	140					
L1	463					
L2	263					
L3	463					
L4	292					
L5	438					
L6	438					
M	129					