


X-steel ball valves, reduced bore

302X series, X-series, female threads / copper, DN 20, reduced bore


Body	DN 20 Steel, P235GH (1.0345)
Ball	DN 20 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 20 PTFE+C
Solder connection	DN 20 Copper, EN 1057: 2006
Stem	DN 20 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 20 FPM
Operation	DN 20 with composite T-handle



Operation conditions
-20 ° – +120 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
Leakage rate A (EN 12266-1)

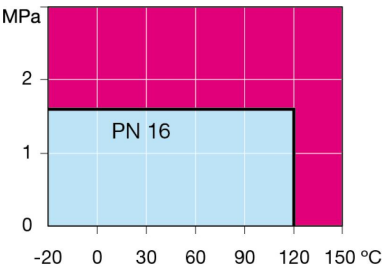

Not for steam

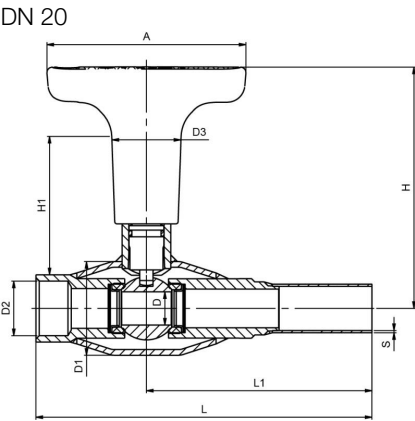

DN	PN	Product no.	A	D	D1	D2	D3	D4	D5	H	H1	L	L1	S	kg
20	16	302020X/18	90	15	42.4	Rp 3/4	32.0	18.0		109	62	152	102	1	0.6
20	16	302020X	90	15	42.4	Rp 3/4	32.0		22.0	109	62	152	102	1	0.6