



23.1.2023


All data subject to change

Copyright © Vexve Oy

All rights reserved.

Förgreningsventiler, reducerat genomlopp

120 serie, engångsventil, svetsning / svetsning, EN (DIN), DN 20-200, reducerat genomlopp

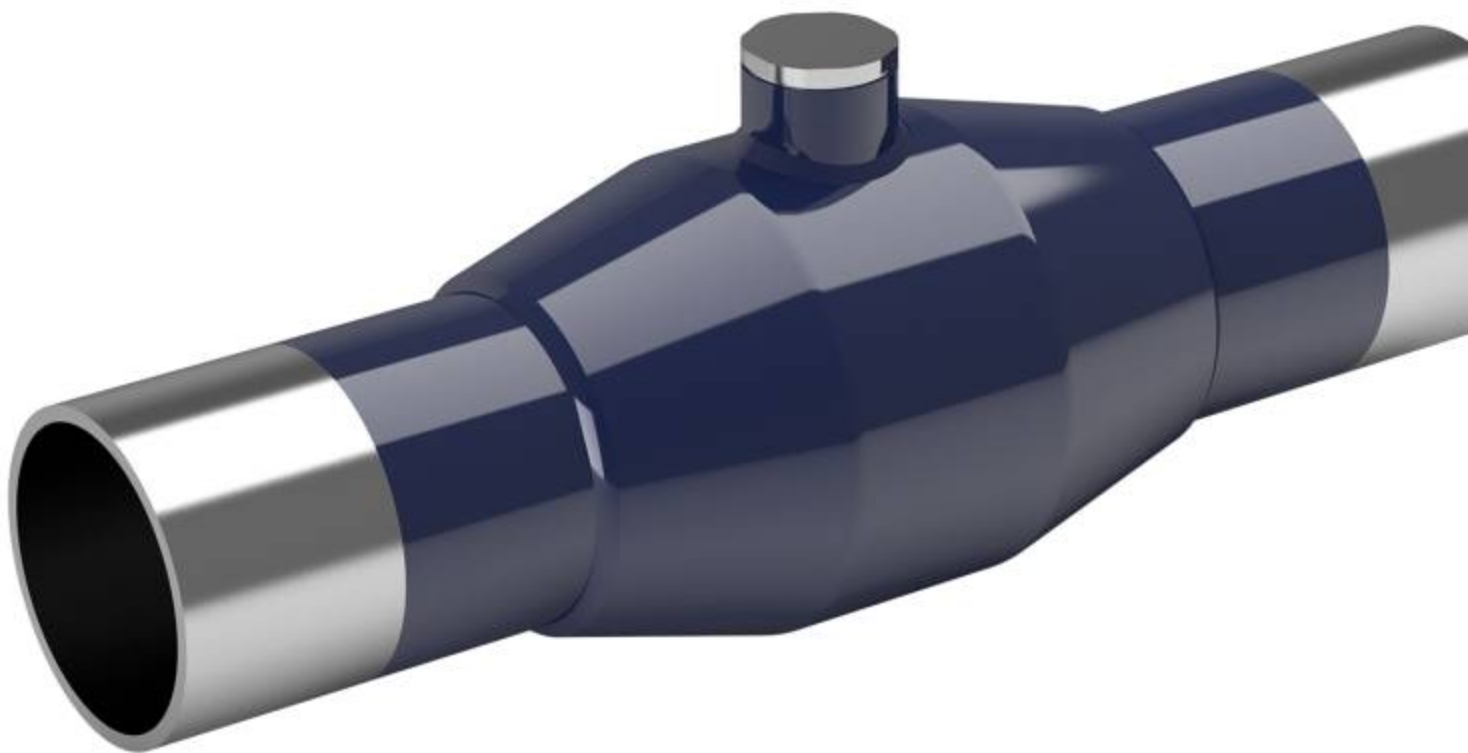

Ventilhus	DN 20-200 Stål, P235GH (1.0345)
Kula	DN 20-200 Rostfritt stål, X5CrNi18-10 (1.4301)
Kultätning	DN 20-200 PTFE+C
Spindel	DN 20-200 Rostfritt stål, X8CrNiS18-9 (1.4305)

Spindeltätning DN 20-200 FPM

Manövrering DN 20-200 med hylsnyckel


Funktionsvillkor

-20 °C - +200 °C

Under -20 °C kontakta tillverkaren


Lägsta tillåtna omgivningstemperatur -40°C

Läckageklass A (EN 12266-1)

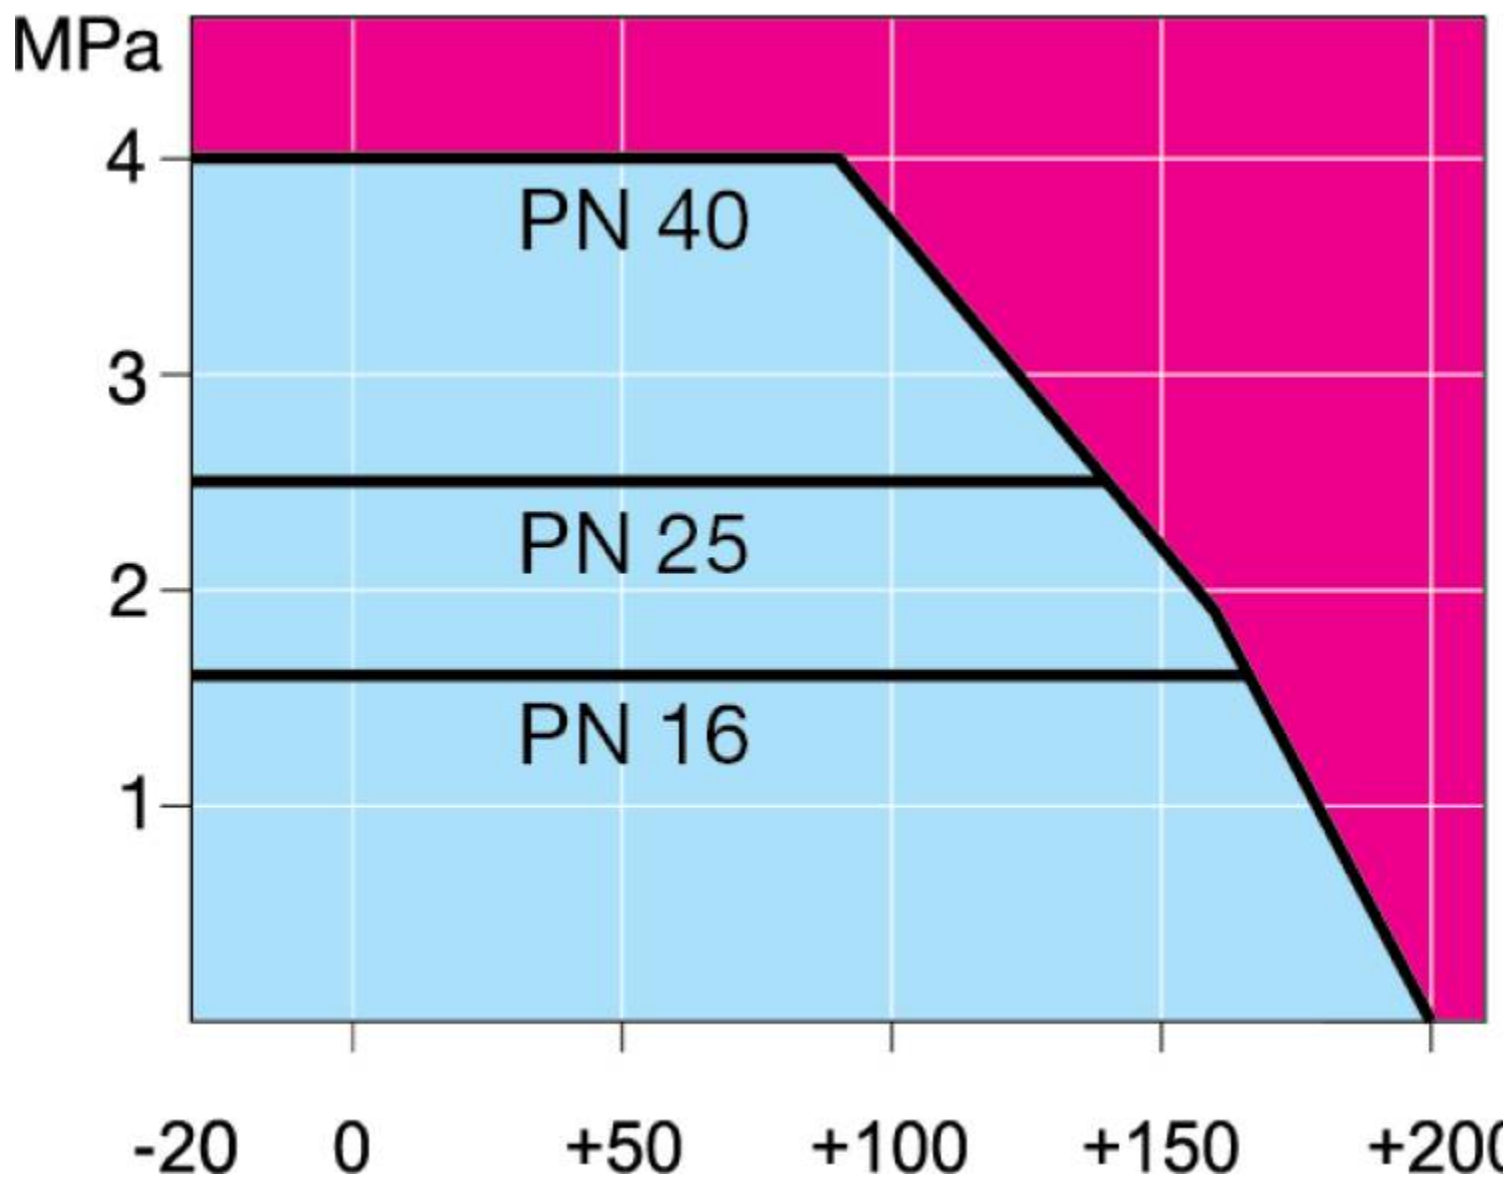

Ej för ånga

DN 20-200

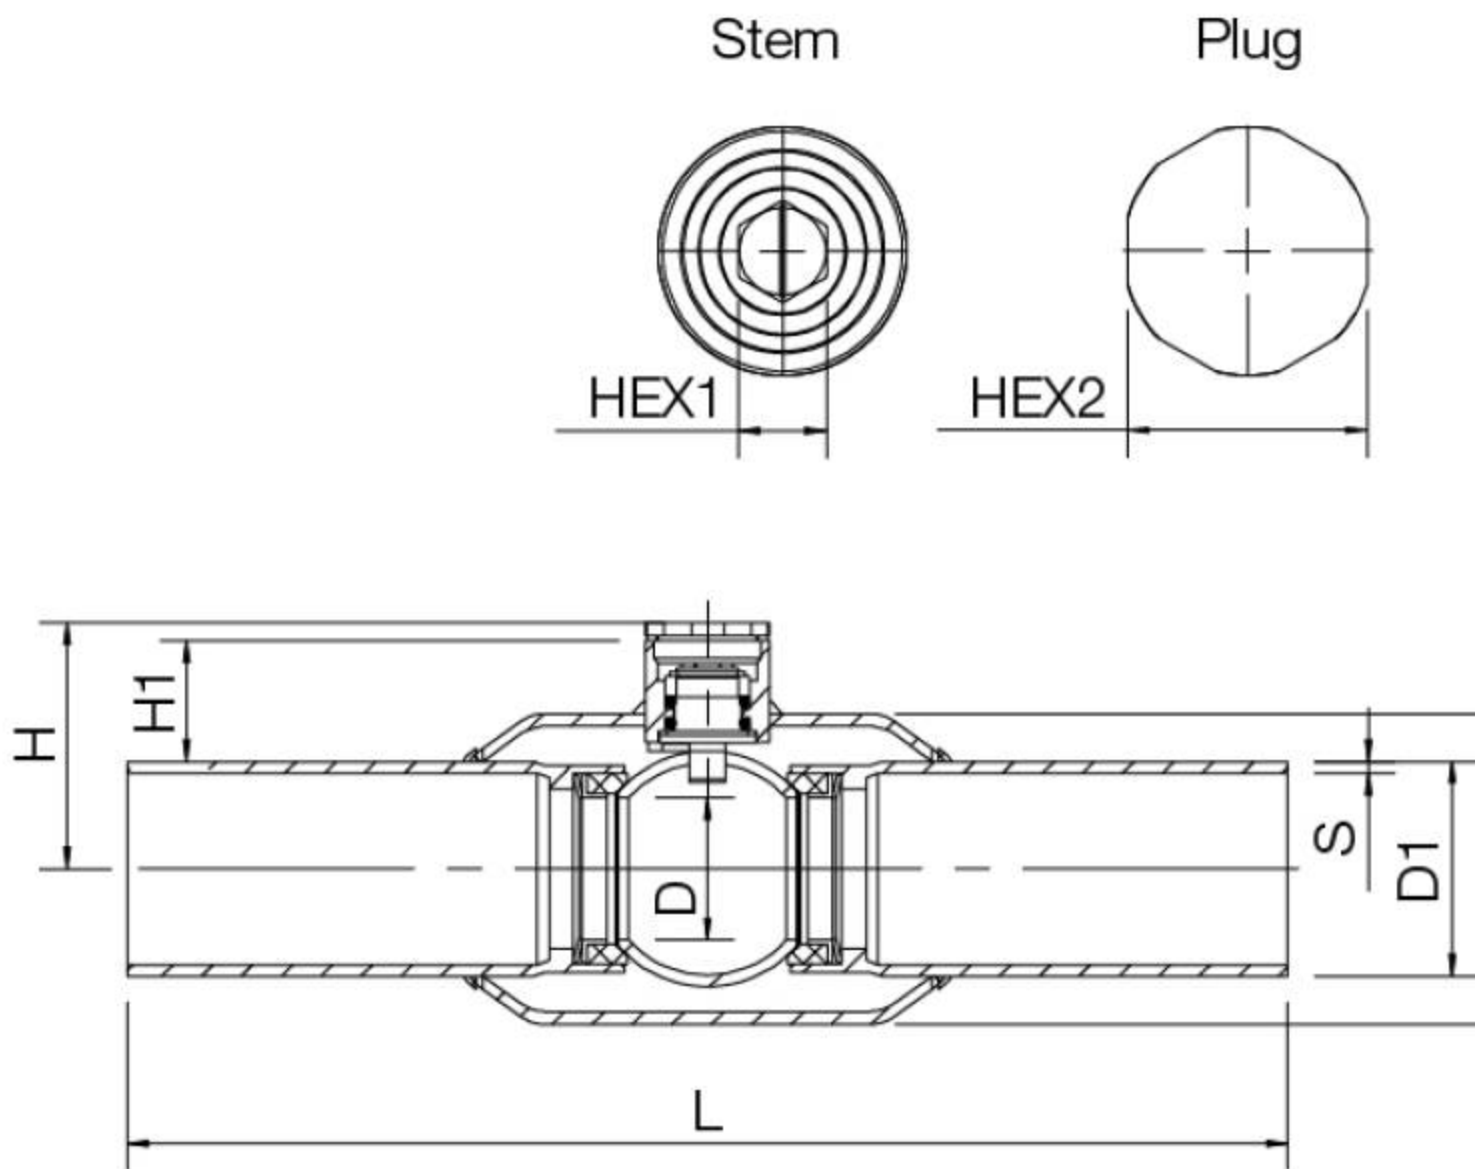

DN	PN	Product no.	RSK no.	D	D1	D2	H	H1	HEX1	HEX2	L	S	kg
20	40	120020	4512185	15	26.9	42.4	36	18		19	230	2,30.8	
25	40	120025	4512186	20	33.7	48.3	42	21	9	22	230	2,61.1	
32	40	120032	4512187	25	42.4	60.3	46	20	9	22	260	2,61.3	

DN	PN	Product no.	RSK no.	D	D1	D2	H	H1	HEX1	HEX2	L	S	kg
40	40	120040	4512188	32	48.3	70.0	55	27	10	27	260	2,6	1.5
50	40	120050	4512189	40	60.3	88.9	63	29	10	27	300	2,9	2.4
65	25	120065	4512190	50	76.1	101.6	74	30	15	32	300	2,9	3.3
80	25	120080	4512191	65	88.9	121.0	87	36	15	32	300	3,2	4.6
100	25	120100	4512192	80	114.3	146.0	104	46	15	36	325	3,6	7.2
125	25	120125	4512193	100	139.7	177.8	123	47	19	41	325	4	12.1
150	25	120150	4512194	125	168.3	219.1	143	53	19	41	350	4,5	16.6
200	25	120200	4512195	150	219.1	273.0	173	58	32	70	390	4,5	31.0