

Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

Altech Easy Flow and Altech Easy flow Epoxy – EAF steel

from

Saint-Gobain Building Distribution (SGDS)



Program:	The International EPD® System, www.environdec.com
Program operator:	EPD International AB
EPD registration number:	S-P-08299
Publication date:	2023-02-17
Valid until:	2028-02-16

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



General information

Programme information

Programme:	The International EPD® System
Address:	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
Website:	www.environdec.com
E-mail:	info@environdec.com

Accountabilities for PCR, LCA and independent, third-party verification
Product Category Rules (PCR): Construction Products PCR 2019:14 version 1.2.3
CEN standard EN 15804 serves as the Core Product Category Rules (PCR)
PCR review was conducted by: <i>The Technical Committee of the International EPD® System.</i>
Life Cycle Assessment (LCA)
LCA accountability: <i>Nadeen Hassan, EANDO AB</i>
Third-party verification
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via: ☒ EPD verification by individual verifier Third-party verifier: prof. Vladimír Kočí, PhD, LCA Studio, Czech Republic, vladimir.koci@lcastudio.cz Approved by: The International EPD® System Procedure for follow-up of data during EPD validity involves third party verifier: ☐ Yes ☒ No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

Company information

Owner of the EPD	Saint-Gobain Distribution Sweden
Contact	SGDS - Beriar Maroof (beriar.maroof@sgdsgruppen.se)
Description of the organisation	SGDS Gruppen - specialists in collaboration for more efficient business in construction and installation. SGDS Gruppen AB is the head company of some of Sweden's leading trading companies in construction, sheet metal, tiles and installation. All the companies have a long and solid industry experience and provide most of Sweden's craftsmen with materials for various projects. Customers in different companies can also buy support items from the sister companies in the group, and in selected cases we take joint projects to facilitate the logistics of the supply of goods, which is then often critical for a smooth construction project. • Optimera - construction trade for professional carpenters • Dahl – heat, plumbing and sanitary specialist • Bevego - building sheet metal, ventilation and technical insulation • Kakelspecialisten and Konradsson's Tiles - tiles, tiling and bathroom fittings The company's focus on sales and services with direct contact to about 150,000 customers regularly. Saint-Gobain Distribution Sweden group (SGDS) is owned by Saint-Gobain with presence in 64 countries and having over 190 000 employees worldwide.
Name and location of production site	Bursa, Turkey




Product information

Product name	Altech Easy flow: Altech Easy flow epoxy
Product identification	Steel pipes
	The EPD is a specific EPD for this product and not an average.
Product description	The product is manufactured according to EN 10217-1. Blasted and powder coated with epoxy in color RAL 7012 to a thickness of min 70 My. Corrosion rated C3H/C4M. The paint is suitable for pipe systems up to 98 °C. FM approved for sprinkler systems mounted with Victaulic fittings and SBSC approved. Delivered in 3- and 6-meter lengths.
UN CPC code	41278 - Tube or pipe fittings, of iron or steel.
Use	The piping system is FM approved for installation in sprinkler systems fitted with Victaulic fittings. The FM approval applies to for wet and dry sprinkling, piping above ground with working pressure 300psi/20,8 bar.

LCA information

Functional unit / declared unit	1 kg of steel pipes
Reference service life	50 years
Database(s) and LCA software used	Calculation completed in GaBi v10.6.2.9 with an integrated Ecoinvent database 3.8
System boundaries	Cradle to grave, with options. (A1-A3, A4, C1-C4, D)

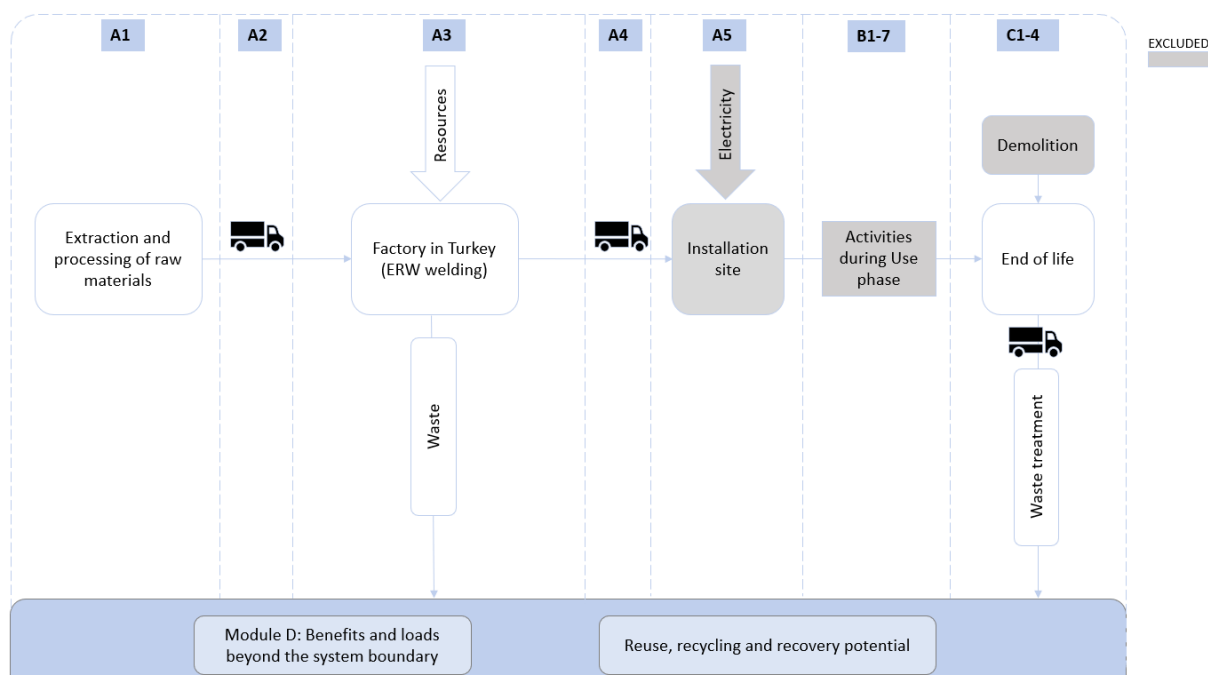

More information

The EPD covers the following products made with EAF routed steel:

- Altech Easy flow

Article number	Dimensions (mm)
238250	42,4
238252	48,3
238254	60,3
238256	76,1
238258	88,9
238260	114,3
238262	139,7
238264	168,3

- Altech Easy flow epoxy (Representative product as the “worst case” scenario)

Article number	Dimensions (mm)
238331	42,4
238332	48,3
238333	60,2
238334	76,1
238335	88,9
238336	114,3
238337	139,7
238338	168,3
238339	219,1
238341	42,4
238342	48,3
238343	60,2
238344	76,1
238345	88,9
238346	114,3
238347	139,7
238348	168,3

A1, Raw material supply

This module considers the extraction and processing of all raw materials, energy, and transportation which occur upstream to the studied manufacturing process.

A2, transport to the manufacturer

The raw materials are transported to the manufacturing site.

A3, manufacturing

This module includes all resources used during the production of Altech Easy flow and Altech Easy flow epoxy and waste produced. This also includes additives and packaging material.

A4, Transport

Transportation from the manufacturing site in Turkey to SGDS Gruppen’s distribution centre and then from the distribution centre to the building site is included.

A5, Construction installation

This stage is not declared.

B1-B7 Use stage

This stage is not declared.

C1 Deconstruction/Demolition

This stage includes the de-construction and/or demolition of the building. This is not relevant as the product included in this study is not used in the construction process.

C2 Transport

This stage represents the transport distance to the waste processing facility.

C3 Waste processing

This stage includes any waste treatment needed.

C4 Final disposal

This includes any material that is landfilled.

D Benefits and loads beyond the system boundary

Emission credits obtained from energy recovery and/or recycling materials.

Cut-off criteria:

All input and output flows in a unit process were considered i.e., taking into account the value of all flows in the unit process and the corresponding LCI where data was available. Data gaps were filled by conservative assumptions with average or generic data. Any assumptions in such case were documented. The use of cut-off criterion on mass inputs and primary energy at the unit process level (1%) and at the information module level (5%).

Content declaration

Content

Content declaration*	Amount (kg)
Steel coil	0,99
Coating	0,01
Total	1

Packaging materials	Weight, kg	Weight-% (versus the product)
PE	0,00421	0,421%
Polypropylene	0,00085	0,085%
Metal strip	0,85924	85,9%
Label	0,00183	0,183%
Paper	0,00001	0,001%

No substances that appear in the REACH candidate list of SVHC (Candidate List of Substances of Very High Concern) are present or used in the product concerning this EPD.

Modules declared and geographical scope

	Product stage			Assembly stage		Use stage							End of life stage				Benefits & loads beyond system boundary
	Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Modules	A1*	A2*	A3*	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	GLO	GLO	TR	EU	-	-	-	-	-	-	-	-	EU	EU	EU	EU	EU
Specidifc data used	>99.5%				-	-	-	-	-	-	-	-	-	-	-	-	-
Variation products	1,3%				-	-	-	-	-	-	-	-	-	-	-	-	-
Variation sites	0%				-	-	-	-	-	-	-	-	-	-	-	-	-

* LCIA results for these stages were obtained directly from the supplier's EPD (S-P-04847).

Potential environmental impact – indicators according to EN 15804+A2

		Results per functional or declared unit: 1 kg										
Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO2 eq	1,0E+00	6,1E-03	3,7E-02	1,1E+00	2,3E-01	0,0E+00	0,0E+00	6,0E-03	0,0E+00	2,4E-03	-3,6E-01
GWP-fossil	kg CO2 eq	1,0E+00	6,1E-03	3,6E-02	1,1E+00	2,2E-01	0,0E+00	0,0E+00	6,0E-03	0,0E+00	2,4E-03	-3,6E-01
GWP-biogenic	kg CO2 eq	1,2E-02	1,3E-05	3,2E-04	1,3E-02	-3,1E-04	0,0E+00	0,0E+00	-8,2E-06	0,0E+00	-2,5E-05	-3,2E-03
GWP-luluc	kg CO2 eq	7,4E-04	2,0E-06	2,6E-04	1,0E-03	1,2E-03	0,0E+00	0,0E+00	3,3E-05	0,0E+00	1,5E-06	-9,8E-05
ODP	kg CFC-11 eq	7,1E-08	1,5E-09	1,7E-09	7,4E-08	1,3E-14	0,0E+00	0,0E+00	3,6E-16	0,0E+00	3,2E-15	-5,5E-12
AP	mole H+ eq	4,4E-03	2,8E-05	2,2E-04	4,6E-03	4,2E-04	0,0E+00	0,0E+00	1,1E-05	0,0E+00	7,6E-06	-8,5E-04
EP-freshwater	kg P eq	5,9E-05	4,5E-08	3,7E-06	6,3E-05	6,7E-07	0,0E+00	0,0E+00	1,8E-08	0,0E+00	1,9E-09	-1,1E-06
EP-marine	kg N eq	9,2E-04	6,3E-06	4,0E-05	9,6E-04	1,7E-04	0,0E+00	0,0E+00	4,7E-06	0,0E+00	1,9E-06	-2,2E-04
EP-terrestrial	mole N eq	1,0E-02	7,0E-05	3,4E-04	1,1E-02	2,0E-03	0,0E+00	0,0E+00	5,3E-05	0,0E+00	2,0E-05	-2,4E-03
POCP	kg NMVOC eq	4,6E-03	2,4E-05	9,7E-05	4,7E-03	3,8E-04	0,0E+00	0,0E+00	1,0E-05	0,0E+00	5,9E-06	-8,4E-04
ADP-minerals & metals	kg Sb eq	4,2E-06	1,5E-08	6,2E-08	4,2E-06	1,9E-08	0,0E+00	0,0E+00	5,0E-10	0,0E+00	1,7E-10	-1,4E-07
ADP-fossil	MJ	1,5E+01	9,8E-02	4,4E-01	1,5E+01	3,0E+00	0,0E+00	0,0E+00	8,0E-02	0,0E+00	3,4E-02	-4,3E+00
WDP	m3	5,3E-01	3,2E-04	2,5E-02	5,5E-01	2,0E-03	0,0E+00	0,0E+00	5,4E-05	0,0E+00	-2,3E-05	-1,9E-03
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption											

Results per functional or declared unit: 1 kg

[illegible]

Additional voluntary indicators

		Results per functional or declared unit: 1 kg										
Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG ²	kg CO2 eq	1,0E+00	6,1E-03	3,6E-02	1,0E+00	2,2E-01	0,0E+00	0,0E+00	5,9E-03	0,0E+00	2,3E-03	-3,5E-01
Acronyms	GWP-GHG global warming potential - greenhouse gases											

Waste and output flows

Waste

			Results per functional or declared unit: 1 kg									
Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	0,0E+00	0,0E+00	3,3E-06	3,3E-06	1,4E-11	0,0E+00	0,0E+00	3,8E-13	0,0E+00	5,2E-12	-4,4E-10
NHWD	kg	0,0E+00	0,0E+00	2,7E-04	2,7E-04	4,3E-04	0,0E+00	0,0E+00	1,1E-05	0,0E+00	5,0E-02	-8,1E-04
RWD	kg	0,0E+00	0,0E+00	0,0E+00	0,0E+00	3,7E-06	0,0E+00	0,0E+00	9,8E-08	0,0E+00	4,1E-07	-2,9E-04
Acronyms	HW Hazardous waste disposed; NHW Non-hazardous waste disposed; RW Radioactive waste disposed											

² The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Output flows

		Results per functional or declared unit: 1 kg										
Indicator	Unit	A1	A2	A3	A1-A3	A4	A5	C1	C2	C3	C4	D
CRU	kg	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00
MFR	kg	0,0E+00	0,0E+00	7,2E-02	7,2E-02	0,0E+00	0,0E+00	0,0E+00	0,0E+00	9,5E-01	0,0E+00	0,0E+00
MER	kg	0,0E+00	0,0E+00	7,1E-03	7,1E-03	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00
EEE	MJ	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00
EET	MJ	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00	0,0E+00
Acronyms	CRU Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy											

Information on biogenic carbon content

Biogenic carbon content	Unit per DU	Amount
Biogenic carbon content in product	kg C	0,0E+00
Biogenic carbon content in packaging	kg C	0,0E+00

1 kg biogenic carbon is equivalent to 44/12 kg CO₂.

Disclaimers

ILCD classification	Indicator	Disclaimer
ILCD Type 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
ILCD Type 2	Acidification potential, Accumulated Exceedance (AP)	None
	Eutrophication potential, Fraction of nutrients reaching freshwater end compartment (EP-freshwater)	None
	Eutrophication potential, Fraction of nutrients reaching marine end compartment (EP-marine)	None
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
ILCD Type 3	Water (user) deprivation potential, deprivation-weighted water consumption (WDP)	2
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2
Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.		
Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.		

References

General Programme
Instructions of the
International EPD® System.
Version 4.

General Programme Instructions of the International EPD® System.
Version 4.

ISO 14020:2000
Environmental labels and
declarations — General
principles

ISO 14020:2000 Environmental labels and declarations — General
principles

ISO 14025:2010
Environmental labels and
declarations - Type III
environmental declarations -
Principles and procedures

ISO 14025:2010 Environmental labels and declarations - Type III
environmental declarations - Principles and procedures

ISO 14044:2006
Environmental management
- Life cycle assessment -
Requirements and guidelines

ISO 14044:2006 Environmental management - Life cycle assessment -
Requirements and guidelines

EN 15804:2012+A2:2019-
Sustainability of construction
works - Environmental
product declaration - Core
rules for the product category
of construction products

EN 15804:2012+A2:2019- Sustainability of construction works -
Environmental product declaration - Core rules for the product category
of construction products

Construction Products
PCR 2019:14 version 1.2.3

EPD International (2021): PCR 2019:14 Construction products and
construction services, version 1.2.3