


SOLDER TYPE ACCESS VALVES 1/4"

STRAIGHT SOLDER WITH TUBE EXTENSION

MV-AVX-6-050 1/4" MFL (+ core & cap) x ODS 6 mm
(ext. length 50 mm).

MV-AVX-6-100 1/4" MFL (+ core & cap) x ODS 6 mm
(ext. length 100 mm).

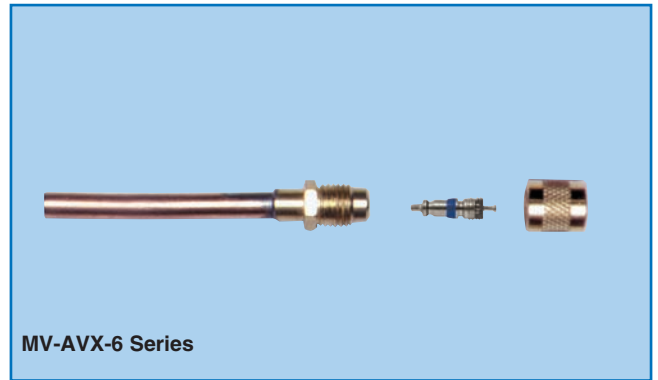

ECONOMY LINE SERVICE VALVES

MV-8408 1/4" MFL (+ core & cap)
x 1/8" ODS extended copper tube.


MV-8403 1/4" MFL (+ core & cap)
x 3/16" ODS extended copper tube.

MV-8404 1/4" MFL (+ core & cap)
x 1/4" ODS extended copper tube.

MV-8405 1/4" MFL (+ core & cap)
x 5/16" ODS extended copper tube.

MV-8406 1/4" MFL (+ core & cap)
x 3/8" ODS extended copper tube.


- These service valves are identical to the premium service valves (page 118) but with standard cap
- **USUAL INSTALLATION INSTRUCTIONS:**
 - 1- Remove cap and core.
 - 2- Insert tubing or body into the corresponding size line or hole and braze into place.
 - 3- Replace core, tighten, evacuate and charge the system. replace cap.

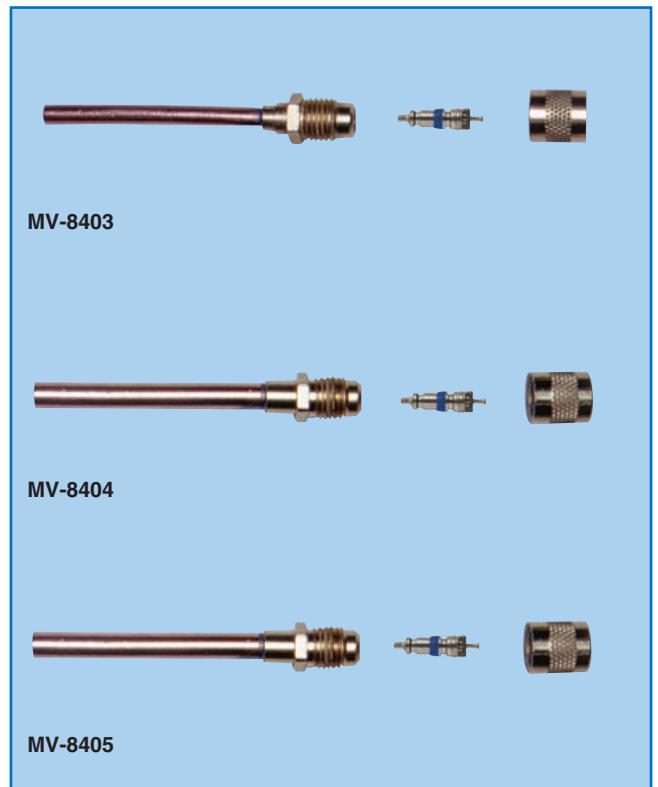

ECONOMY LINE SERVICE VALVES WITH STOP

MV-9404 1/4" MFL (+ core & cap)
x 1/4" ODS extended copper tube with stop.


MV-94/G Spare gasket for **MV-9404**.

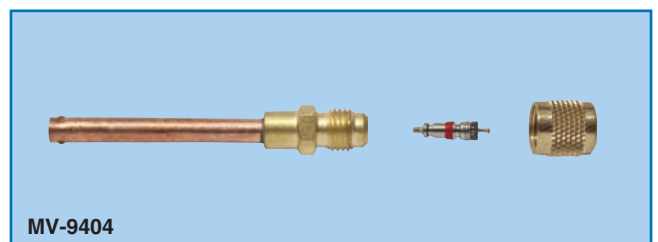

PREMIUM SERVICE VALVES

MV-3608	1/4" MFL (+ core & cap with core-wrench remover) x 1/8" ODS extended copper tube x 1/8" MPT.
MV-3603	1/4" MFL (+ core & cap with core-wrench remover) x 3/16" ODS extended copper tube x 1/8" MPT.
MV-3604	1/4" MFL (+ core & cap with core-wrench remover) x 1/4" ODS extended copper tube x 1/8" MPT.
MV-3602	1/4" MFL (+ core & cap with core-wrench remover) x 1/4" ODS extended copper tube x 3/16" and 1/8" ODS bushings x 1/8" MPT.

- These valves offer **several O.D.S. "step" diameters** to solder and one more threaded "**step**" in **1/8" MPT male pipe**.
- The hexagonal ring allows to use a tightening counter-wrench and is standard. Also, see other hexagonal spare part counter-rings, page 119.

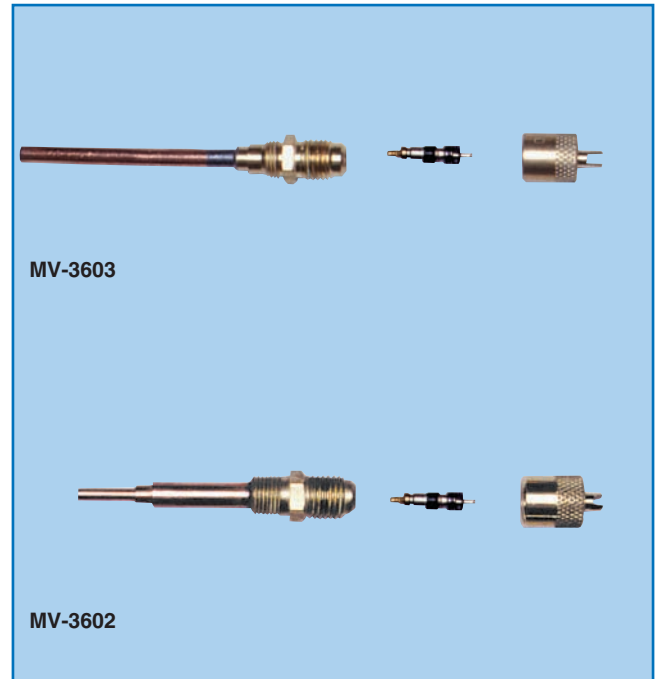

STANDARD SERVICE VALVES

MV-1010	1/4" MFL (+ core & cap with core-wrench remover) x 1/8" ODS extended copper tube.
MV-1212	1/4" MFL (+ core & cap with core-wrench remover) x 3/16" ODS extended copper tube.
MV-2525	1/4" MFL (+ core & cap with core-wrench remover) x 1/4" ODS extended copper tube.
MV-3605	1/4" MFL (+ core & cap with core-wrench remover) x 5/16" ODS extended copper tube.
MV-3606	1/4" MFL (+ core & cap with core-wrench remover) x 3/8" ODS extended copper tube.

- These valves are identical to the above "**PREMIUM**" (see above specifications) but without 1/8" MPT male pipe threaded step.

