

**TOOLS, INSTRUMENTS  
AND EQUIPMENT FOR  
THE HVAC/R INDUSTRY**

**PRODUCT CATALOG**

**cps<sup>®</sup>**

**HVAC/R  
Specialist**



**BLACKMAX**

**Leak-Seeker<sup>®</sup>**

**Pro-Set**

**COMPUTE-A-CHARGE<sup>®</sup>**

**Tech-Set<sup>™</sup>**

**OPTIMA<sup>™</sup>**

**5-2-1<sup>®</sup>**  
COMPRESSOR SAVER<sup>®</sup>



	CPS LINK APP .....	4-5
	ELECTRONIC LEAK DETECTION .....	6-10
	AC/R CHEMICAL TOOLS .....	11-13
	REFRIGERANT CHARGING SCALES & ACCESSORIES .....	14-17
	RECOVERY EQUIPMENT .....	18-24
	VACUUM PUMPS .....	25-27
	TEST GAUGES & FUEL OIL TEST KIT .....	28
	VACUUM & PRESSURE/TEMPERATURE GAUGES .....	29-30
	ELECTRICAL & SPECIALTY METERS .....	31-33
	TEMPERATURE & SYSTEM MEASUREMENT .....	34-37
	SMART TOOLS .....	38-45
	DIGITAL MANIFOLDS .....	46-47
	BLACK & CHROME MANIFOLDS .....	48-49
	PREMIUM PISTON SERIES MANIFOLDS .....	50-51
	BRASS BODY SERIES MANIFOLDS .....	52
	CHARGING HOSES .....	53-54
	CHARGING BALL VALVES AND VALVE ADAPTERS .....	55
	TUBING TOOLS .....	56-66
	SPECIALTY HAND TOOLS .....	67-73
	BRAZING & SOLDERING .....	74
	BRASS ADAPTERS, FITTINGS & VALVE CORE TOOLS .....	75-79
	5-2-1 PRODUCTS .....	80-83

# Introducing Smart, Connected, Tools From CPS

## Using CPS<sup>®</sup> link<sup>™</sup> Technology




Technology so advanced, CPS was awarded a patent (U.S. Patent 1,043,161). CPS Link<sup>™</sup> combines the power of smart devices with our patented measurement technology and custom app to enhance diagnostic and service capabilities.



All CPS digital tools and test instruments are designed exclusively for use with our technology, making CPS products the most accurate measuring instruments with unsurpassed speed and reliability.



CPS Link<sup>™</sup> for Android and iOS devices acts as the interface between the measurement technology built into CPS digital products and the user. This allows the most integrated and cross-platform flexibility of any other product to date.

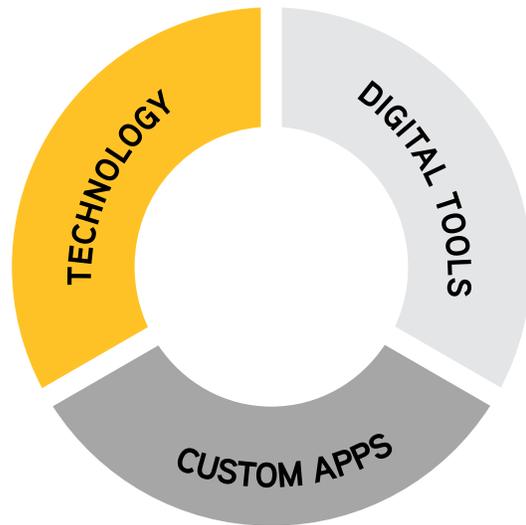



PATENTED  
TECHNOLOGY



INNOVATIVE  
TOOLS



JUST  
ONE APP



STAY  
ORGANIZED



CONVENIENCE  
ACCURACY

### Unclutter and untether with **One Smart App.**

When you choose CPS., you get much more than just precision instruments. You get years of trouble-free performance, industry leading accuracy and the best value for your money.

On your smart phone or tablet, perform HVAC/R measurements and analysis while connected to one or more CPS wireless tools simultaneously-all made possible by our CPS Link app.

CPS Link™ combines our patented communication technology built inside every CPS wireless tool with powerful analytical and integrated management software that allows you to access the following features:


- **Data From Multiple Wireless Devices:** Simultaneously gather data from one or more wireless CPS devices
- **Client Lists:** Create and save client historical information
- **Job Checklist:** Create and retain job reminders
- **Job Tracker:** Create and retain record of services performed
- **Geolocation:** Record and store where jobs were completed
- **Time Stamp:** Record and store time and date
- **Monitor Readings:** Remotely
- **Share/Send Data:** Conveniently e-mail or save data
- **Selectable Language:** Choose from different languages to work in

### CPS Link™ enabled wireless products include:

- Digital Manifolds
- Vacuum Gauge
- Temperature and Pressure Gauge
- Refrigerant Charging Scales
- Airflow & Environmental Meter
- Airflow Capture Hood
- Temperature & Humidity Data Logger
- Static Pressure Meter & Probe Kit
- Clamp Power Meter
- Smart Indoor Air Quality Meter



**cps** link™

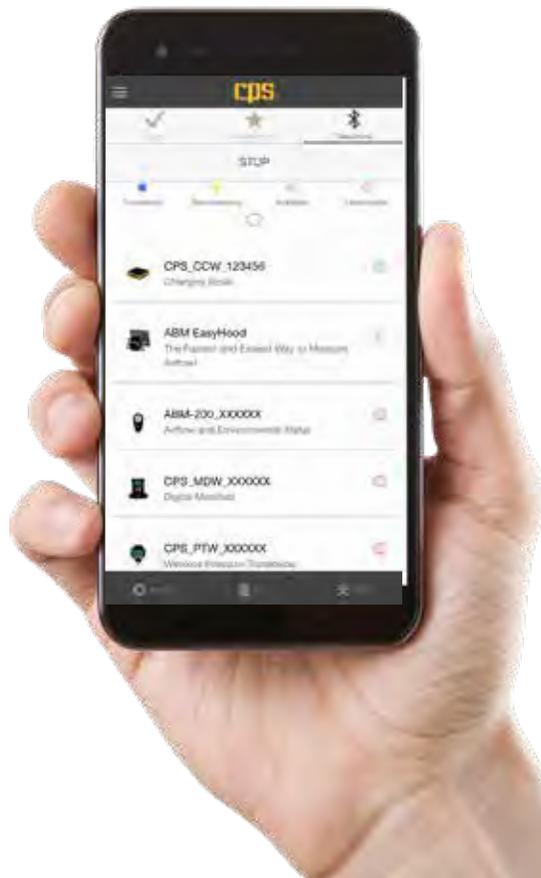


# ELECTRONIC LEAK DETECTION

## THE LEAK-SEEKER® BRAND HAS BEEN SYNONYMOUS WITH HIGH PERFORMANCE ELECTRONIC REFRIGERANT LEAK DETECTION FOR OVER 30 YEARS.


The manual-select Leak-Seeker® I and fully automatic Leak-Seeker® II, featuring our patented E\_MOS® leak detection technology are the most sensitive, stable, reliable and accurate detection products, with the longest sensor life on the market today.

\*U.S. Patent # 8,555,701

- Detects refrigerants including those with hydrocarbon components (CFC, HCFC, HFC, HFO, NH3, HC. Hydrogen trace gas in 95% N2, 5% H2 mixture)
- Patented E\_MOS detection technology increases battery and sensor life, with replaceable sensor, filter and tip
- One button controls On/Off and all functions.
- Microprocessor controlled sensor improves sensitivity and reduces false alarms
- Metal sensor housing with patented water vapor stabilizing filter eliminates false alarms due to condensate
- Optimal leak-finding performance under a broad range of conditions
- Simple, intuitive bar graph LED display
- Software managed sensor rejuvenation at startup ensures highest sensitivity
- Ergonomic, high-impact housing with high output alarm speaker
- Designed and manufactured in U.S.A. with U.S. and globally sourced components.

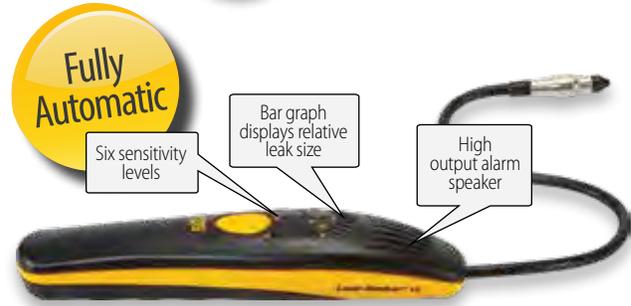


### LS1 Leak-Seeker® I



**PROGRESSIVE ALARM MODE:** Alarm pitch and number of lighted LEDs progressively increase as the leak source is approached. Allows searching for a broad range of leak sizes.

**THRESHOLD ALARM MODE:** Provides a quick go, no/go verifying a leak has been found and approximate size.

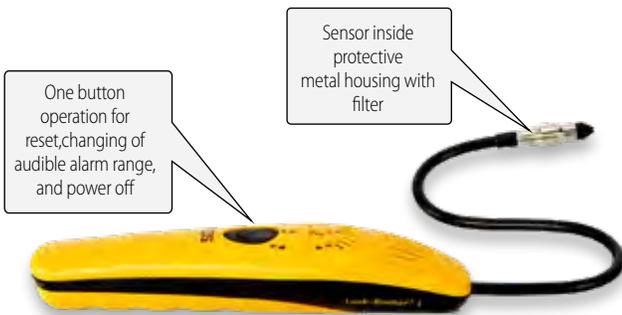

### LS2 Leak-Seeker® II



- Simple, intuitive bar graph LED display
- 56 levels of sensitivity automatically selected by proprietary Powershift™ software

**THE ONLY LEAK DETECTOR WITH FULLY AUTOMATIC SENSITIVITY SELECTION AND CONTROL. SIMPLY TURN IT ON AND PINPOINT THE LEAK.**

### ✂️ REPLACEMENT PARTS (LS1, LS2)

EMOS2		E_MOS Technology Sensor
LS2XF		E_MOS Technology Sensor Filters (10-Pk)
LS2XVF		Vapor Filter Sensing Tip



COMPARISON	Leak-Seeker® I	Leak-Seeker® II	Tech-Set™ LS780C	Leak-Seeker® LS790B
Detector Type	Patented E_Mos Detection Technology		Proprietary Ion-Pump sensor with built-in selective filter housing	
Sensitivity	Better than 0.1 oz (3g) / year		Better than 0.25 oz (7g) / year leak rate of HFC	
Sensitivity Selection	Manual	Fully automatic	Manual	
Refrigerant Sensitivity	All, including those with hydrocarbon components (CFC, HCFC, HFC, HFO, NH3, HC. Hydrogen trace gas in 95% N2, 5% H2 mixture)		All, including those with hydrocarbon components (CFC, HCFC, HFC, HFO, NH3, HC)	
Visual Alarm	Visual tachometer-like bar graph display with 8 high intensity LEDs		High intensity LED (Varies in brightness)	High intensity bar graph display
Flex Probe	15.5" flexible probe for hard-to-reach areas		18" metal flex probe	
Operating Temperature	0 to 140°F (-18 to 60°C)			
Controls	One button controls on/off and all functions		OFF, LO & HI sensitivity modes	6 button keypad
Battery Life	3 "C" batteries (>50 hours continuous use)		4 "AA" alkaline batteries (>40 hours continuous use)	
Weight	18 oz (500g)			
Audible Alarms	In Progressive Mode: Extended tone range In Threshold Mode: Single high pitch tone	2 user selectable alarm ranges	128 computer generated tones to precisely guide user to the source of the leak	
Lock-Out Mode		N/A	N/A	Yes
Low Battery Indication	Green (middle) LED turns off when batteries at 10% capacity	Rightmost (No Battery) LED stays on when batteries at 10% capacity	Center LED above "u" lights during operation	
Auto-Off	Yes, after 10 minutes of inactivity		No	Yes, after 15 minutes of inactivity
Sensor Life	>500 hours continuous use		Replace seasonally	
Warranty	1 year	2 years	1 year	2 years
Standards	CE, Complies with European Standard EN14624: 2012		CE, SAE J1627	CE, SAE J1627
Certifications	Individually Calibrated To NIST Traceable Leak Standard			

## LEAK-SEEKER® LEAK DETECTORS WITH ION-PUMP® SENSOR TECHNOLOGY

- Detects refrigerants including those with hydrocarbon components (CFC, HCFC, HFC, HFO, NH3, HC)
- Ion-pump sensor with built-in selective filter housing
- 128 computer-generated tones and display alerts the user to varying halogen concentrations.



### LS780C Leak-Seeker

Easy-to-use rugged, 3-position slide switch to turn the instrument on and select either LO or HI sensitivity ranges. Visual indication of the leak size is provided by a high intensity LED varying in brightness with the concentration of the refrigerant detected.



### LS790B Leak-Seeker

Combines the most advanced microcomputer circuitry with field proven ion-pump® sensor technology creating a highly sensitive, accurate electronic refrigerant leak detector. Over 128 computer generated tones and a high intensity bar graph display quickly alerts the user to varying halogen concentrations. Patented automatic calibration design eliminates the need for manual balance or tick rate adjustments while the user selectable 10 sensitivity ranges enables the LS790B to detect leaks of all refrigerants.

### ✂ REPLACEMENT PARTS (LS780C, LS790B)

LSXSF		Selective Filter Housing
LSXBMK		Maintenance Kit: (1) LSXS + (1) LSXSF (replaces LSXMK)
LSXS		Ion-Pump Sensor
LSXBC		Battery Compartment Cover (Yellow)
LSXC		Carrying Case (Fabric)
LSXE		Earphone

**EZSMOKE CE-9i** Leak Detection System**NEW**

EZSMOKE allows a technician to use low pressure, non-toxic smoke, with a pleasant lemon scent and UV dye, to quickly locate annoying sewer gas leaks that are often difficult and time consuming to find in cuts, cracks, fractures, punctures, porosity or unsealed fittings inside or outside residential or commercial buildings.


EZSmoke uses patented technology to send non-toxic smoke containing a trace dye (UltraTrace UV) through the air (not a liquid) that is contained within pipes, wall cavities, or other forms of enclosed spaces. Any visible smoke immediately provides an indication of a large leak.

If white smoke alone does not locate the source of sewer gas odor, technicians can rely on UltraTrace UV, that is carried within the smoke vapor, to pinpoint the source of very small leaks of annoying sewer gas.

Patented in the U.S. and foreign countries.

**SPECIFICATIONS**

Height	26" (56.0 cm)
Width	16.5" (33.0 cm)
Depth	10.5" (24.0 cm)
Weight	40 lb. (18.1 kg)
Shipping weight	44 lb. (20 kg)
Power supply	100-240V 50/60 Hz
Power consumption	10 amps
Max. UltraTrace UV Vol.	32 oz. (0.9 Liter)
Inlet pressure required	50 to 175 psi (3.4 to 12 bar)
Supply pressure	5 psi (0.34 bar   34 kPa)
Supply volume	26.4 Gal (100 L) per min
Smoke supply line hose	25 feet (7.6 m)
Power cord	10 feet (3 m)
Remote starter cable	12 feet (3.6 m)
Operating temp. range	45°F to 140°F (7.2°C TO 60°C)
Max altitude	Up to 2000 M (6,561 Ft)
Fuse	10A (two required)
Warranty	1 year

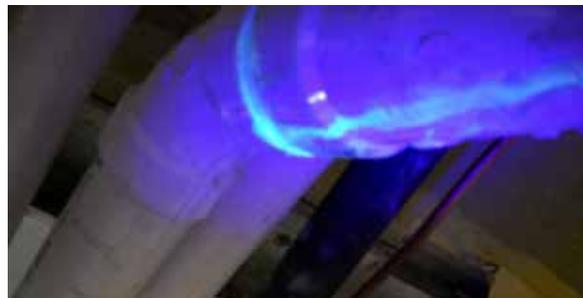

### Fast, Verifiable Results

EZSMOKE provides fast, verifiable results and easy testing of all repairs. After locating and repairing any leaks run a pressure decay test on the system again. If no pressure decay is found, all repairs are successful.

### Dye Marks the Spot

EZSMOKE patented UltraTraceUV® dye travels with the white smoke and settles outside most leaks in the system. The included UV light UltraTraceUV® dye pinpoints the exact location of any leak.

### ACCESSORIES INCLUDED WITH CE-91

CE0716UV	UltraTrace UV (16 OZ.) Smoke Producing Solution. Part No. is for one bottle
CEA-60	Remote Control
CEA-35	Combination white/ UV LED light, 2 'D' batteries and yellow glasses
CEA-63	25 ft. smoke supply hose. Connect as many hoses to each other as needed
CEA-64	3/4" NPT Plastic Ball Valve, cam and groove connector and clip (connects to end of smoke supply hose CEA-63)
CEA-65	Adapter cone-standard size. (For introducing Diagnostic Smoke into any system 1" to 3 1/2" diameter). Threads on to adapter CEA-64
CEA-66	Adapter cone-large size. (For introducing Diagnostic Smoke into any system 3 1/2" to 6" diameter). Threads on to adapter CEA-64
CEA-99	Accessories bag for smoke supply hose



CE0716UV



CEA-35



CEA-63



CEA-60



CEA-99



CEA-64



CEA-65



CEA-66

### OPTIONAL ACCESSORIES FOR CE-91

CEA-36	Powerful Focused-Beam UV Light, yellow glasses, 12-VDC cigarette lighter adapter and 120-VAC charger
--------	--



CEA-36



### GS40 Gas-Seeker® Portable Combustible Gas Detector

The **GS40** is a low maintenance, easy-to-use portable combustible gas leak detector engineered to pinpoint leaks in residential, commercial and industrial appliances. Advanced semiconductor sensor and electronic control package enables detection of gases commonly found in service applications including: carbon monoxide, natural gas, propane, ammonia, methane, acetone, hydrogen and iso-butane, with a virtually instantaneous alarm response period.

#### GS40 SPECIFICATIONS

Detecting Range	0 - 100% LEL referenced to methane.
Alarm Indication	Both visual and audible (>40db) alarm indicators
Low Level Alarm	Preset at 10% Methane LEL
High Level Alarm	Preset at 30% Methane LEL
Operating Conditions	0°F to 140°F (-20°C to +40°C) at less than 98% RH (non-condensing)
Power	3VDC working voltage using four 1.5V AA batteries
Battery Life/Indicator	20 hr continuous use. Orange LED constant on when low battery
Sampling	Natural diffusion
Dimensions	7.2" x 0.71" (183 x 18 mm)
Weight	18 oz (500g) including battery

#### REPLACEMENT PARTS

RMX12	Replacement Sensor
LSXC	Fabric Carrying Case
LSXE	Earphones



### RM Refrigerant Monitor Control Box and Sensor Housing

Compact, highly reliable, yet economical refrigerant leak monitoring system designed to monitor a single refrigerant in a single zone. Provides early audible and visual warning of refrigerant leakage with adjustable sensitivity settings between 100 to 1000 PPM with an auxiliary 1/2 HP N.O. and N.C. dry contact control function for operating an additional alarm or other safety device. Replacement sensors are interchangeable enabling the replacement of a failed sensor directly in the field without recalibration, minimizing downtime.

#### RM SERIES SPECIFICATIONS

Sensitivity	100 to 1,000 ppm
Accuracy	±3% of setting (or ± 25 ppm)
Visual Alarms	High intensity LED display
Audible Alarm	85 dB @ 12"
Operating Temperature (Control Module & Sensor)	14 to 150°F (-10 to 65°C)
Relative Humidity Range (Control Model & Sensor)	10 to 95% (Non-condensing)
Power	12 to 24V AC or DC
Sensor Failure Indicator	Visual indication in control module
Weight	18 oz (500 g)
Warranty	1 year

Refrigerant Monitor	Detects Refrigerant	Replacement Sensor
RM134	R-134	RMX12
RM22	R-22	RMX11
RM404	R-404	RMX12
RM407	R-407	RMX11
RM407a	R-407A	RMX12
RM410	R-410A	RMX12
RM502	R-502	RMX12
RM507	R-507A	RMX12

## UV55 Refrigerant Uv Dye Leak Detection Kit

Conduct a fast, easy, mess-free air conditioning leak test with our ultra-flourescent universal dye.

### KIT INCLUDES

- MoonLight™ flashlight with 9, true ultraviolet LEDs and 3 AAA batteries
- MoonShine™ blue light-blocking glasses
- UVNJS Mess-free and easy-to-use squeeze injector
- UVS2 universal (orange) OEM approved dye cartridge
- R-34a 90° low side snap coupler
- Carrying case and instructions



## UVPRO Moonlight™ Flashlight And Moonshine™ Glasses

Our MoonLight™ flashlight is the most compact and efficient ultraviolet light we have ever designed. It contains nine high intensity, true ultraviolet LED engineered to maximize the fluoescing capabilities of today's most commonly used detection dyes used in AC systems, while greatly reducing the amount of "nuisance" background blue light emitted.

- Operates 8 hr (continuous on)
- Inspection range up to 3' (0.9 m)
- 100,000 hour LED life
- Instant "ON" with no heat produced
- Works with all common dye additives

### REPLACEMENT PARTS

UVXG	UV Enhancing Safety Glasses
UVXB	12V Rechargeable Battery Pack for 50W or 100W Light
UVXBC	Battery Carrying Case
UVXC	110V Battery Charger



## UVAL 50w 90° auto swivel light w/ battery clips

MoonShine™ glasses, when used in conjunction with the MoonLight™ Auto Swivel light, block visible blue light, which provides an ideal means of viewing a fluoescing dye that might leak from a closed, pressurized AC system, thereby indicating where a repair is needed.

### REPLACEMENT PARTS

UVAL	50W 90° Auto Swivel Light w/ Battery Clips
UVXB	12V Rechargeable Battery Pack for 50W or 100W Light
UVXBLB	UV Bulb for 50W Light



## UVNJS Squeeze Injector

The squeeze gun™ injection system is the easiest, cleanest and fastest method of injecting dye into a system. Simply match the appropriate pre-filled, pre-measured universal dye cartridge with the size of the system being serviced then place it into the Squeeze Gun. Make your connection and inject the dye. It's that simple.

- Refillable and expandable universal dye injector (dye cartridges sold separately)
- 1/4" F BV Hose
- 1/2 oz. capacity



Step 1: Load cartridge.



Step 2: Connect and bleed hose.



Step 3: Inject, then discard empty cartridge.



### REPLACEMENT PARTS

UVXSGA	Adapter Hose
--------	--------------

## UVNJ Anodized Aluminum Flow Through Injector

- Refillable and expandable universal dye injector (dye cartridges sold separately)
- In-Line AC&R 1/4"
- 1/4 to 1/2oz. - 7.5 to 14ml

## TLJ2 Anodized Aluminum Injector

- Refillable and expandable universal dye injector (dye cartridges sold separately)
- 1/4 oz. / 7.5 ml to 2 oz. / 60 ml capacity
- R-12 1/4" SAE Oil Dye Injector

### REPLACEMENT PARTS

TLJX2H	Replacement Oil Injector Hose
--------	-------------------------------

**MOONSHINE™ IN-LINE DYE CAPSULES**

- Universal OEM approved dyes formula
- All MoonShine™ dye meets SAE J2297 standard
- See statement below
- All dyes include I.D. labels

**S****Ice machines, window AC units, autos, refrigerators**

- For AC & R systems containing up to 2.9 lb (1.3 kg) refrigerant charge
- OR 15 fl. oz (0.4 L) of oil

**M****Residential systems**

- For AC & R systems containing up to 4.9 lb (2.2 kg) refrigerant charge
- OR 1.6 qt (1.8 L) of oil

**ML****Light commercial and large residential systems**

- For AC & R systems containing up to 5 to 9.9 lb (2.3 to 4.5 kg) refrigerant charge
- OR 1.7 to 3.2 qt. (1.9 to 3.7 L) of oil

**L****Commercial and light industrial, including all split systems**

- For AC & R systems containing up to 10 to 25 lb (4.6 to 11.4 kg) refrigerant charge
- OR 3.3 to 2 gal (3.8 to 9.1 L) of oil

**S****UV101**

6 pack

**M****UV1**

6 pack

**ML****UV2**

6 pack

**L****UV3**

6 pack

**MOONSHINE DYE CARTRIDGES**

- Use with UVNJS Squeeze Gun Injector
- Cleanest, easiest and fastest method of injection
- 4 sizes to match capacity of system
- Locates source of air entering system
- Eliminates over-injection of dye
- All dyes include I.D. labels

**S****UVS101**

6 pack

**M****UVS1**

6 pack

**ML****UVS2**

6 pack

**L****UVS3**

6 pack

**UVUD6****Moonshine™ Bottled Universal Refrigerant Dye**

6 pack

- Built-in measuring cap
- 8 oz (237 ml)
- Lowest cost per application
- Excellent for large systems

**UVUDS****Moonshine™ Universal Refrigerant Dye**

6 pack

- 1 oz (30 ml) bottles
- Lowest cost per application

**UVCLNR****Moonshine™ Dye Cleaner**

1 pack

- 32 oz (946 ml)



### **OPEB6S** eBOOST™ AC/R Performance Enhancer

- Restores older AC/R systems to original efficiencies
- Improves coil heat transfer
- Increases cooling capacity
- Increases lubricity of compressor oil
- Reduces compressor friction, vibration and noise
- Extends compressor oil and system life
- Reduces energy and maintenance costs
- 1 Oz (30 ml)



### **OPEBF6S** eBOOST™ AC/R De-Icer

- Compatible with all refrigerant gases (including CFC, HFC and HCFC)
- Won't affect performance of refrigerant gas
- Neutralizes and prevents formation of acids
- Effective in all sizes of systems
- 1 Oz (30 ml)



### **OPEBA6S** eBOOST™ AC/R Moisture Remover

eBOOST™ AC/R Moisture Remover is a dehydrating additive that eliminates moisture and prevents water molecules from forming in AC/R systems. Safe for all systems, compatible with all AB, mineral, POE and PAG oils used in refrigeration systems. Will not break down or leave behind any type of particulate matter, acids, gels or polymers. 1 Oz (30 ml)



### **OPEBM6S** eBOOST™ AC/R Acid Neutralizer

- Prevents acids from forming
- Neutralizes acids caused by compressor burnout
- Neutralizes acids introduced by A/C recovery units
- Safe with all system components
- Ideal for preventive maintenance
- Fast and immediate results
- 1 Oz (30 ml)



### **OPEBAK** eBOOST™ AC/R Acid Test Kit

Fast, easy and reliable way to determine the relative pH of any lubricant used in air-conditioning or refrigeration compressors. For all air-conditioning and refrigeration system lubricants. Enough for 4 tests. 1 oz (30 ml)

#### **📦 KIT INCLUDES**

4 Vials (blue liquid) Lubricant pH Detect

4 Pipettes

1 Plastic Carrying Case



## COMPUTE-A-CHARGE®

REFRIGERANT CHARGING SCALES & ACCESSORIES

### THE MOST TRUSTED BRAND OF CHARGING/RECOVERY SCALES

Recommended by OEMs and professional service technicians for over 30 years, the Compute-A-Charge series of scales have become the preferred tool for accurate, reliable charging of today's advanced AC/R systems.

- Ideal for critical charging of large or small systems and all refrigerant recovery applications
- Environmentally sealed and temperature compensated for reliable operation in extreme environments
- Rugged cast aluminum platform and base assemblies for stability and long life
- Electronic and mechanical overload protected to withstand 150% of capacity
- Calibrated to strict NIST standards (National Institute of Standards & Technology)
- Designed and manufactured in the USA with U.S. and globally sourced components



#### CC220EW Enhanced Wireless Refrigerant Charging Scale

- 220 lb (100 kg) capacity
- Accurate to 0.015% of Reading [or ± selected resolution, whichever >]
- 4 adjustable resolution settings
- 8.75" (22.3 cm) square platform
- 7 button corded/wireless control - For manual or programmable operation
- Mobile device control - For added functions, including Tank Tracker™
- Audible and visual alarms for use during charging and recovery



#### ✂️ REPLACEMENT PARTS FOR CC220, CC220E, CC220EW

CCXC	Protective carrying case
CCX220BC	Battery door with magnet



Bluetooth

CPS Link™ U.S. Patent # 9,043,161

#### CHARGE



#### RECOVER



Color Sleeve

# Take Control With TankTracker™

INVENTORY | COSTS | RECORD-KEEPING | USAGE | LOCATION

**Supply and recovery tank inventory management system exclusively from CPS**


The Tank Tracker™ feature (Patent Pending), developed by CPS Products, Inc., provides a convenient way to manage and track your inventory of refrigerant supply and recovery tanks in the field.

Tank Tracker™ is included within the CPS Link app (U.S. Patent # 9,043,061), and it allows technicians to set up an electronic inventory of all their Supply and Recovery Tanks. Information such as tank size, type and amount of refrigerant contained in each can be entered.

Tank Tracker™ will then record the addition or subtraction of refrigerant from a tank, along with the date, place and time the tank was used, as well as the name of the job and the customer it was used for. All of this information can be e-mailed to clients, technicians, a home office, or others.

The Tank Tracker™ feature is available when the CPS Link app has been activated, and any CPS wireless scale has been paired to a mobile device. This allows technicians to perform programmable charging or recovery.

For automatic charging or recovery, pair any CPS wireless scale and the SVW Wireless Solenoid Valve to a mobile device running the CPS Link app. The SVW will turn ON or OFF to automatically control refrigerant flow.

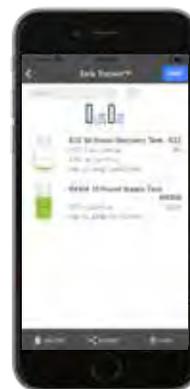

Tank Tracker Screen



CPS Link™ U.S. Patent # 9,043,161



Track who, when, where and how much refrigerant is used on every job



Track who, when, where and how much refrigerant is used on every job

Log refrigerant usage/disposal per EPA requirements



## SVW Wireless Solenoid Valve

The SVW is a compact, battery operated solenoid valve with 1/4" SAE IN/OUT male ports that open and close in 100 milliseconds to control refrigerant flow. Operate it manually, or in automatic mode for more precise control. Works with all CPS wireless scales using our patented CPS Link™ technology.

- Operate manually for instantaneous On/Off control of refrigerant.
- Or, pair to any CPS wireless scale for automatic, precise control of refrigerant during service routines.
- Saves time, reduces cost and extends service equipment life
- Compatible with all common CFC, HFC, HCFC refrigerants and blends
- Operates with CPS Link app

### SPECIFICATIONS

Transmission Range (Line Of Sight)	Up to 150 feet
Continuous Battery Life	Up to 500 hours
Maximum Working Pressure	500 Psig (34.5 Bar)
IN/OUT Fittings	Brass, 1/4 SAE male
Approvals	FCC, IC, CE
Dimensions	3" x 2-3/4" x 4.5" (76 x 70 x 114mm)
Packaging	Color box
Warranty	1 Year

### RECOVER



### CHARGE





### **CCD110** Refrigerant Charging Scale

- 110 lb (50 kg) capacity
- 0.20 oz (5 g) display resolution
- Accurate to 0.015% of reading (or +/- 0.2 oz/5g (whichever greater))
- 3 button corded control with large, high contrast, wide angle, display
- Cast aluminum platform and base
- 3 point non-rocking foot pattern for best stability
- Heavy duty rubber platform mat
- Padded carrying case with shoulder strap
- Unique patent pending "delta" shaped design



### **CC220** Refrigerant Charging Scale

**THE ORIGINAL. TIME TESTED. AN INDUSTRY STANDARD!**

- 220 lb (100 kg) capacity
- Accurate to 0.015% of Reading [or  $\pm$  0.25 oz (10 g) whichever >]
- 0.25 oz (10 g) resolution
- 8.75" (22.3 CM) square aluminum platform
- 3 button corded control with large LCD display



### **CC800A** Programmable Refrigerant Charging Scale

- 220 lb (100 kg) capacity
- Accurate to 0.015% of Reading [or  $\pm$  0.25 oz (10 g) whichever >]
- 0.25 oz (10 g) resolution
- 8.75" (22.3 CM) square aluminum platform.
- Programmable for automatic charging or recovery via built-in solenoid valves
- 7 button corded control



Model #	CCD110	CC220	CC220EW	CC800A
Maximum Load	110 lb (50 Kg)		220 lb (100 kg)	
<b>Control</b>				
Control To Scale Connection	Flexcord		Flexcord Or Wireless (CPS Link™)	Flexcord
Control Mount	360 swivel hook	Magnet back & 360 swivel hook		
Control Buttons (Physical Functions)	3 (On/Off, Lb/Kg, Tare)		7 (On/Off, Lb/Kg, Tare, Go/Hold, Increase, Set/Reset, Decrease)	
Tare (Empty) Weight Mode	Yes			
Programmable Solenoids	n/a			Yes
Auto Power Off Feature (ENABLED)	Display shows "APO ON" at power up. [Display will turn OFF after 10 minutes inactivity]. Selectable	Display Turns OFF After 10 Minutes Inactivity	Default = Display Turns OFF After 10 Minutes Inactivity (Can re-set in increments of 5, 10, 15, 30, 60 mins or OFF)	10 mins (if weight on platform does not change by more than 1oz (30g) within 10 mins).
Auto Power Off Feature (DISABLED)	Display shows "APO OFF" at power up [Display will be constant ON]	Display shows "APO OFF" at power up [Display will be constant ON]		
Smart Awake	Display shows last weight measurement at time of Auto-Off, updated to current value	Scale displays last weight measurement at time of Auto-Off, updated to current value		
<b>CHARGE/RECOVER ALARMS</b>				
Charge/Recover Alarm	n/a		Audible & visual alarms during charge and recovery	Continuous beep during charge
<b>WIRELESS</b>				
Wireless Connectivity	n/a		Yes	n/a
Transmission Range	n/a		150' (45.7m) direct line of sight	n/a
Frequency Range	n/a		2.4 GHz, ISM Band (Worldwide)	n/a
<b>BATTERY</b>				
Power Source	Hand Control: (1 or 2) 9V Alkaline (1 Included)	(1 or 2) 9V Alkaline (2 Included)	Hand Control: (2) 9V Alkaline (Included)	
Continuous Battery Life	One 9V = 75 hrs: Two 9V = 150 hrs.	One 9V = 75 hrs: Two 9V = 150 hrs.	One 9V = 50 hrs: Two 9V = 100 hrs.	30 Hrs
Battery Status Indicator	2 Segment Battery Icon	2 Segment Battery Icon	3 Segment Battery Icon	4 Segment Battery Icon
<b>LCD DISPLAY</b>				
Units (Weight) Readout	lb & oz, or kg & gm			
Weight Accuracy	0.015% of Reading [or ± 0.2 Oz (5 g) whichever >]	0.015% of Reading [or ± 0.25 oz (10 g) whichever >]	0.015% of Reading [or ± selected resolution whichever >]	0.015% of reading, or ± 0.25 oz/10 gm (whichever greater)
Display Resolution (Increments)	0.20 Oz (5 g)	0.25 Oz (10 g)	Selectable: 0.1 Oz (2 g); 0.2 Oz (5g); 0.25 Oz (10 g); or 0.50 Oz (25g)	0.25 Oz (10 g)
<b>WEIGHTS, DIMENSIONS, MATERIALS</b>				
Platform Dimensions	Delta shape [fits w/1 10.4" (26.4 cm) circle]	8.75" x 8.75" (22.3 x 22.3 cm)		
Scale Weight (With Case)	5.5 Lb (2.5 Kg)	5.68 lb (2.6 kg)	5.62 lb (2.55 kg)	8.5 lb (3.9 kg)
Length Of Control Cord	6' (1.8 m), Extended			
Maximum Working Pressure		n/a		500 Psig (34,5 Bar)
Maximum Operating Differential		n/a		485 Psig (33,5 Bar)
Rubber Platform Cover	Yes	No		
Storage Case	Soft Case	Molded Case		
Overload Protection	Mechanical (Internal Overload Stop)	Mechanical (Internal Overload Stop)		
Operating Temperature Range	14°F to 122°F (-10°C to 50°C)	14°F to 122°F (-10°C to 50°C)		
Operating Humidity Range	0% to 95% (Non-Condensing)	0% to 95% (Non-Condensing)		
<b>APPROVALS, CALIBRATION, WARRANTY</b>				
Approvals	CE		FCC, IC, CE	CE
Calibrated To NIST Standards	Yes			
Declaration Of Conformity	EN 61326-1:2013, CISPR 11:2009/ A1:2010	EN 61326-1:2013, CISPR 11:2009/ A1:2010		n/a
Warranty	1 Year			

## BLACKMAX<sup>®</sup>

### TR700 Series

## THE ULTIMATE IN DEPENDABILITY.

Designed for servicing residential and commercial refrigeration systems, the BlackMax TR700 Series are the industry's best-performing refrigerant recovery machines incorporating non-restrictive piston manifold valves, a powerful two cylinder oil-less reciprocating compressor and twin fans. The resulting system provides superior airflow and condensing, which maximizes speed in both direct liquid and direct vapor recovery.

### FEATURES:

- Powerful 2 cylinder, 2/3 HP oil-less reciprocating compressor
- Exceptional compressor, condensing and cooling systems allow fast recovery in high temperature environments
- Automatic low pressure shut-off feature turns unit off when recovery is complete
- Rugged high density, double-wall, contemporary plastic housing with easy-view top mounted controls
- R-410a ready with 550 psi high pressure shut-off switch
- Ergonomic well balanced design for easy transport (includes shoulder strap)
- Built-in, removable, replaceable suction filter located under suction port
- Compact design with easy 4 bolt access
- Externally serviceable valves and gauges
- Integrated component mounts for quiet operation
- Less parts provide greater reliability
- Worldwide patents pending



### REPLACEMENT PARTS

TR21X1	Valve Rebuild Kit
TR21X3	Piston/Connecting Rod Replacement
TR21X2	Complete Rebuild Kit
TR21X5	Eccentric Crank Set
TR700X1	Head Replacement
CRXF3	(6) Suction Filters




Twin fans, high density polyethylene case, 4 skid-resistant rubber feet



Selectable manual or automatic shut-off mode settings



Large 2-1/4" diameter gauges and indicator lights for high pressure or low pressure status

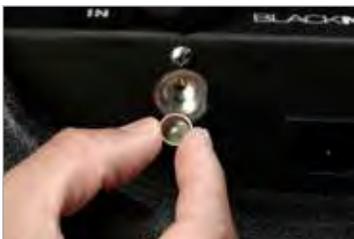

Replaceable, cleanable filter



Detachable power cord



Adjustable carrying strap

# Pro-Set®

## TR600 Series

### FAST. COMPACT. RELIABLE.

We took six recovery machines and their verified recovery rates. The Pro-Set TR600 was the undisputed fastest recovery machine for R410a and fastest overall for R22, R134a and R407c.

- Powerful 2/3 HP oil-less 2 cylinder reciprocating recovery compressor
- Exceptional compressor, condensing and cooling systems allow fast recovery in high temperature environments
- Fastest R-410A flow rates in class!
- 550 psi high pressure shut-off switch
- Durable inlet and outlet ball valve construction with 1/4 turn gauges
- Integrated component moorings for quiet operation
- High impact injection molded housing
- Ergonomic well balanced design for easy transport
- No tool access suction housing for easy filter clean/change
- Quiet operation
- Worldwide patents pending



### REPLACEMENT PARTS

TR21X1	Valve Rebuild Kit
TR21X2	Complete Rebuild Kit
TR700X1	Head Replacement
CRXF3	(6) Suction Filters
TR21X3	Piston/Connecting Rod Replacement



Easy-to-read In and Out gauges (2 1/4" diameter)



In/Out ports with protective cap and cleanable 100 mesh filter



Air intake



Air exhaust



### TRS600 Series PRO-SET® Ignition-Proof Refrigerant Recovery Machine

The TRS600 includes the same features as the TR600, but with an ignition proof design for Class A1, A2, A2L, A3 refrigerants.

- Designed and tested to meet ANSI 12:12.01 Ignition Proof standards
- Maintenance free oil-less compressor
- Permanently lubricated and sealed main bearings
- Ignition proof power switch
- Sealed start relay
- Hard wired 9.8 ft. (3m) power cord



Ignition proof power switch



High pressure shut off indicator

## RECOVERY MACHINE PERFORMANCE AND SPECIFICATION COMPARISON

		BLACKMAX® TR700 SERIES							PRO-SET® TR600 SERIES						
															
		TR700	TR710	TR700C	TR710C	TR700S	TR710S	TR700E	TR600	TR610	TR600K	TR600S	TR600	TR600E	
<b>Voltage (Hz)</b>		115V (60 Hz)				220-240V (50 Hz)			115V (60 Hz)		220V (50 Hz) 230V (60 Hz)	220-240V (50 Hz)		115V (60 Hz)	220-240V (50 Hz)
<b>Motor Size</b>		2/3 HP							2/3 HP						
<b>Compressor Type</b>		Two cylinder, oilless							Two cylinder, oilless						
<b>Overload Protection</b>		15 Amp		13 Amp			10 Amp		15 Amp		10 Amp				
<b>Power Consumption</b>		1000 W							1000 W						
<b>Tank Overfill Sensor Cord</b>		✗	✓	✗	✓	✗	✓	✗	✗	✓	✗	✗	✗	✗	
<b>High Pressure Shut-Off</b>		550 psig (38 bar)		450 psig (31 bar)			550 psig (38 bar)		38 bar		550 psig (38 bar)		550 psig (38 bar)		36 bar
<b>Manual Reset Button</b>		✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	✗	✗	✓	
<b>Ignition Proof Design</b>		✗							✗				✓	✗	
<b>Suction Pressure Gauge</b>	<b>Outer Scale</b>	-30" Hg to 500 psig				-1 to 20 bar			-30" Hg to 500 psig					3500 kPa	
	<b>Inner Scale</b>	-76 cm Hg to 35 kg/cm				115V (60Hz)			-76 cm Hg to 35 kg/cm			-30" Hg to 500 psig		35 bar	
<b>Discharge Pressure Gauge</b>	<b>Outer Scale</b>	0 to 1000 psig				0 to 70 bar			0-550 psig					3800 kPa	
	<b>Inner Scale</b>	0 to 70 kg/cm				0 to 7000 kPa								38 bar	
<b>AHRI 740 Class Refrigerants</b>	<b>Class III</b>	R-12, R-134A, R-401C, R-406A, R-500							R-12, R-134A, R-401C, R-406A, R-500						
	<b>Class IV</b>	R-22, R-401A/B, R-402B, R-407/C/D/E/F, R-408A, R-409A, R-411A/B, R-412A, R-502, R-509A							R-22, R-401A/B, R-402B, R-407/C/D/E/F, R-408A, R-409A, R-411A/B, R-412A, R-502, R-509A						
	<b>Class V</b>	R-402A, R-404A, R-407A/B, R-410A/B, R-507A							R-402A, R-404A, R-407A/B, R-410A/B, R-507A						
<b>ASHRAE Refrigerant Code</b>		A1							A1			A1, A2, A2L, A3	A1		
<b>Power Cord Length</b>		6' (1.82 m) Detachable							3.5 ft (1.06 m)			9.8 ft (3.0 m)		3.5 ft (1.06 m)	
<b>Dimensions</b>		9.75" x 21" x 14.0" (24.7 cm x 53.3 cm x 35.6 cm)							8.5" x 16.7" x 12.3" (21.6 cm x 42.4 cm x 31.2 cm)						
<b>Weight</b>		32 Lb (14.5 kg)							28 Lb (12.7 kg)						
<b>Operating Temperature Range</b>		32°F to 120° (0°C to 49° C)							32°F to 120°F (0°C to 49°C)						
<b>Approvals</b>		UL*	UL*	CSA	CSA	CE	CE, TUV	UL*	UL*	CE	CE	UL*, ANSI**	CE, TUV		
<b>Warranty (Years)</b>		1							1						
<b>Recovery Rates</b>	<b>Refrigerant</b>	Direct Vapor		Direct Liquid		Push - Pull Liquid		High Temp Vapor Rate		Direct Vapor		Push - Pull Liquid		High Temp Vapor Rate	
	R410a	.703 lb/min (0.319 kg/min)		11.95 lb/min (5.42 kg/min)		31.7 lb/min (14.38 kg/min)		0.816 lb/min (.37 kg/min)		.703 lb/min (0.319 kg/min)		31.7 lb/min (14.38 kg/min)		0.816 lb/min (.37 kg/min)	
	R22	.597 lb/min (0.271 kg/min)		8.86 lb/min (4.02 kg/min)		31.53 lb/min (14.3 kg/min)		0.86 lb/min (0.39 kg/min)		.597 lb/min (0.271 kg/min)		31.53 lb/min (14.3 kg/min)		0.86 lb/min (0.39 kg/min)	
	R134a	.503 lb/min (0.228 kg/min)		7.8 lb/min (3.54 kg/min)		25.66 lb/min (11.64 kg/min)		n/a		.503 lb/min (0.228 kg/min)		25.66 lb/min (11.64 kg/min)		n/a	
	R407c	.536 lb/min (0.243 kg/min)		9.50 lb/min (4.31 kg/min)		29.14 lb/min (13.22 kg/min)		n/a		.536 lb/min (0.243 kg/min)		29.14 lb/min (13.22 kg/min)		n/a	

\* Evaluated for performance rated at 60Hz in accordance with Sec. 608 of the Clean Air Act (Feb. 29, 1996) using AHRI-740-98 test methods. Verified UL Refrigerant Recovery Rates @ 60Hz (Reduce 15% for all 50Hz models) \* Results shown available at database.ul.com. \*\*ANSI: Designed, tested and passed ANSI 12.12.01

A2 refrigerants include R-152A A2L refrigerants include R-1234yf, R-1234ze, and R-32 A3 refrigerants include R-290, R-600, and R-600A

PRO-SET® TR21 SERIES

TECH-SET® TR19 SERIES



TR21	TR21C	TR21S	TR21E	TR21	TR22	TR22S	TR19	TR19	TR19S	TR19K
115V (60Hz)		230 V (50Hz)	220-240 V (50Hz)	115V (60Hz)			115V (60Hz)	220-240V (50 Hz)		220-240 V 50 / 60 Hz
2/3 HP						1/2 HP				
Two cylinder, oilless						Two cylinder, oilless				
×	13 Amp	×	10 Amp	×	×	×	×			
1000W						550W				
×		×		×	✓		×			
550 psig Auto Reset	450 psig Auto Reset	550 psig Auto Reset	36 bar	550 psig Auto Reset	550 psig Auto Reset		550 Psig (38 bar) Auto Reset	450 Psig (31 Bar)	550 Psig (38 bar) Auto Reset	
×		✓		×		×				
×		✓		×		×	✓	×	×	×
No Gauges						No Gauges				
R-12, R-134A, R-401C, R-406A, R-500						R-12, R-134A, R-401C, R-406A, R-500				
R-22, R-401A/B, R-402B, R-407/C/D/E/F, R-408A, R-409A, R-411A/B, R-412A, R-502, R-509A						R-22, R-401A/B, R-402B, R-407/C/D/E/F, R-408A, R-409A, R-411A/B, R-412A, R-502, R-509A				
R-402A, R-404A, R-407A/B, R-410A/B, R-507A						R-402A, R-404A, R-407A/B, R-410A/B, R-507A				
A1			A1, A2, A2L, A3		A1		A1	A1, A2, A2L, A3	A1	
6 Ft.						6 Ft.				
6" x 12" x 9" (15cm x 30cm x 23cm)						6" x 11" x 9" (15cm x 28cm x 23cm)				
24.3 lb (11.0 kg)						18.7 lb (8.5 kg)				
32°F to 120° (0°C to 49° C)						32°F to 120° (0°C to 49° C)				
UL*	CSA	CE	CE, TUV	UL*, ANSI**	UL*	CE	UL*	UL*, ANSI**	CE	
1						1				

Direct Vapor	Direct Liquid	Push - Pull Liquid	High Temp Vapor Rate	Direct Vapor	Direct Liquid	Push - Pull Liquid	High Temp Vapor Rate
.703 lb/min (0.319 kg/min)	11.95 lb/min (5.42 kg/min)	31.7 lb/min (14.38 kg/min)	0.816 lb/min (.37 kg/min)	.273 lb/min (0.124 kg/min)	8.36 lb/min (3.79 kg/min)	24.25 lb/min (11 kg/min)	n/a
.597 lb/min (0.271 kg/min)	8.86 lb/min (4.02 kg/min)	31.53 lb/min (14.3 kg/min)	0.86 lb/min (0.39 kg/min)	.311 lb/min (0.141 kg/min)	6.97 lb/min (3.16 kg/min)	24.25 lb/min (11 kg/min)	.280 lb/min (.127 kg/min)
.503 lb/min (0.228 kg/min)	7.8 lb/min (3.54 kg/min)	25.66 lb/min (11.64 kg/min)	n/a	.291 lb/min (0.132 kg/min)	4.30 lb/min (1.95 kg/min)	20.66 lb/min (9.37 kg/min)	n/a
.536 lb/min (0.243 kg/min)	9.50 lb/min (4.31 kg/min)	29.14 lb/min (13.22 kg/min)	n/a	.320 lb/min (0.145 kg/min)	6.64 lb/min (3.01 kg/min)	23.61 lb/min (10.71 kg/min)	n/a

**TR21 SERIES** Refrigerant Recovery Machines**The smallest, lightest, fastest and most reliable recovery machine in its class!**

- Weighs only 25 pounds!
- Fastest ARI recovery rates in its class, best speed-to-weight ratio in the industry!
- Five unique patented and patent pending design elements
- Vapor or liquid recovery, including R-410A
- Compact and easy to carry
- Multi-language color box

**✂ REPLACEMENT PARTS**

TR21X1	Valve Rebuild Kit
TR21X3	Piston/Connecting Rod Replacement
TR19X2	Eccentric Crank Set
TR21X5	Eccentric Set
TR21X4	Complete Head Replacement
TR21X2	Complete Rebuild Kit

**TRS21** Ignition Proof Refrigerant Recover Machine

- Designed and tested to meet ANSI 12:12.01 Ignition Proof standards
- Ignition proof ON-OFF switch
- Sealed start relay
- For use on refrigeration systems utilizing:
  - Class A1** (nontoxic, nonflammable),
  - Class A2L** (nontoxic, low flammability)
  - Class A2** (nontoxic, flammable) and
  - Class A3** (nontoxic, flammable)
- Maintenance free oilless compressor
- Permanently lubricated and sealed main bearings
- Improved piston seal design for less leakage and deeper vacuums
- 550 Psig high pressure cutoff switch with LED indicator
- Cleanable 100 mesh inlet filter
- Fastest recovery rates in its class
- Multi-language color box

**TR19 SERIES** Tech-Set Refrigerant Recovery Machines**ALSO AVAILABLE IN IGNITION PROOF (R-32 READY) TRS19 (Pg. 21)**

- Critical oilless compressor components use high temperature resistant materials
- Main bearing is completely sealed and isolated from refrigerant contact.
- Maintenance free oilless compressor design
- Precision machined from aluminum and steel components
- Permanently lubricated and sealed main bearings
- Improved piston seal design for less leakage and deeper vacuums
- Weighs less than 19 pounds
- Special cooling system design improves compressor longevity
- Efficient suction and discharge valve design for faster recovery
- Durable crankshaft design for improved reliability
- Unique head design for superior performance

**✂ REPLACEMENT PARTS**

TR21X1	Valve Rebuild Kit
TR21X3	Piston/Connecting Rod Replacement
TR19X1	Complete Rebuild Kit
TR19X2	Eccentric Crank Set
TR21X4	Complete Head Replacement





# MOLECULAR TRANSFORMATOR DRAMATICALLY INCREASES THE **SPEED** OF ANY RECOVERY MACHINE.

**MT69**

## CUT YOUR RECOVERY TIME IN HALF.

This MT69 is the only commercialized recovery sub-cooler manufactured for the professional A/C & R technician to work with ALL refrigerants. Use the MT69 in-line with the discharge line of any recovery machine to dramatically increase the speed of recovery!

- Increases the speed and performance of your recovery machine up to 95%! For example: The time needed to recover 15 lb of R-22 at 120oF is 32 minutes. Using the MT69, it takes only 17 minutes.
- Functions as a submersible condenser or evaporator

- Rugged, compact and easy to use
- Essential for recovering R410A on hot days and eliminates the need to change tanks
- Eliminates annoying shutdown due to high pressure switch limit

### The hotter it is, the better it works


- Essential for recovering liquid refrigerant on cold days
- Eliminates liquid slugging at colder temperatures
- Patents Pending
- Designed and manufactured in USA with U.S. and globally source components



## SPECIFICATIONS

	MT69	MT69SS
Dimensions	4.25" x 9" (10.9 cm x 22.9 cm)	
Weight	3.50 lb (1.58 kg)	3.10 Lb (1.40 kg)
Maximum Operation Pressure	500 Psig	
Discharge Pressure Gauge	0 to 600 Psig	
Inlet/Outlet Connections	0 to 600 Psig	
Refrigerant Compatibility	CFC, HCFC, HFC, HC, and HFO	CFC, HCFC, HFC, HC, HFO, and NH3
Coil	Copper	Stainless Steel

## HOW THE MT69/ MT69SS MOLECULAR TRANSFORMATOR WORKS:

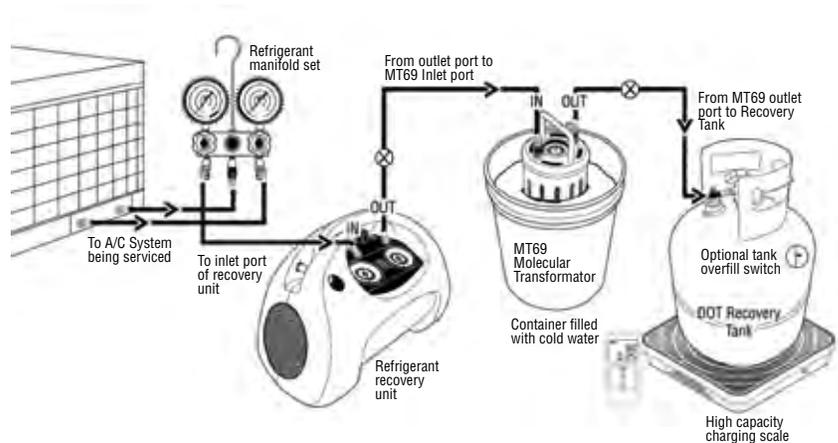

The effects of ambient temperature and elevated tank pressures on the speed of the refrigerant recovery process are in many cases more important than the speed of the recovery machine itself. As ambient temperature increases, pressure in the recovery cylinder increases, reducing the recovery speed and in many cases can lead to a high pressure shutdown as the recovery equipment and tank pressure limits are reached. The Molecular Transformator reduces the temperature and pressure of recovered refrigerant during the recovery process, dramatically improving the recovery speed and high ambient temperature performance of all commercially available recovery machines in addition to extending the life of the equipment.

## MOLECULAR TRANSFORMATOR

**MT69SS**

With stainless steel coil- for use on refrigerant systems utilizing Class A1, A2, A2L and A3 refrigerants

## REFRIGERANT CYLINDER HEATER STRAPS

**Charge faster in cold weather!**

Ideal for use on portable refrigerant charging or recovery tanks, especially in cold weather when transfer times increase, or when a tank is low on refrigerant. These durable straps create a positive pressure between the refrigerant tank and an A/C or refrigeration system, thereby reducing refrigerant transfer time.



**CCXHB** (120V)



**CCXHBV** (220V/240V)

### SPECIFICATIONS

	CCXHB	CCXHBV
Voltage (Hz)	120 VAC (50/60 Hz)	240 VAC (50/60 Hz)
Watts	340 W	
Amps	2.8	1.4
For Cylinder Sizes	From 8" (20 cm) to 14" (35 cm) Diameter Tanks	
Control (Overheat Protection)	Automatic Thermal Cutoff (Encapsulated Thermostat)	
Minimum Surface Temperature Of Tank	115°F (46°C)	
Maximum Thermostat Temperature	130°F (55°C)	
Power Cord Length	20" (0.50 m)	
Adjustable Velcro Strap Max Length	19" (0.48 m)	
Heater Strap Width	3" (76 mm)	
Heater Strap Length	24" (60 m)	
Heater Strap Color	Dark Orange	
Electrical Connection Type	Nema 5-15P	IEC320 Inlet
Packaging	Header Card + Clear Poly Bag	

## REFRIGERANT RECOVERY TANKS

- DOT Certified for refrigerant storage
- Refrigerant compatible sealant used on all mechanical connection points
- Auxillary port for optional overfill sensor
- Liquid and Vapor UL listed Y-valve
- Powder coated for maximum rust protection



30 lb

**CRX430T**

**CRX430TS** with overfill sensor

• 1/4" SAE Male



50 lb

**CRX400T**

**CRX400TS** with overfill sensor

• 1/4" SAE Male



50 lb

**ARX134T**

**ARX134TS** with overfill sensor

• 1/2" ACME Male fitting

(Automotive use)



90 lb

**CRX390T**

**CRX390TS** with overfill sensor

• 1/4" SAE Male fitting

## REFRIGERANT RECOVERY TANKS

- DOT Certified for refrigerant storage
- Refrigerant compatible sealant used on all mechanical connection points
- Auxillary port for optional overfill sensor
- Liquid and Vapor UL listed Y-valve
- Powder coated for maximum rust protection

### SPECIFICATIONS

		Weight Of Empty Tank		Tank Water Capacity		Total Weight (Tank & Refrigerant)		Tank Foot Ring Diameter		Tank Outside Diameter		Tank Height		Max. Pressure Rating (psig)	
		lb	kg	lb	kg	lb	kg	in	mm	in	mm	in	mm		
<b>For HVAC/R Use</b>															
30 Lb	CRX430T	17.5	7.9	26.2	11.9	43.7	19.8	7.8	198.1	9.5	241.3	18.1	459.7	400	
	CRX430TS	17.5	7.9	26.2	11.9	43.7	19.8	7.8	198.1	9.5	241.3	18.1	459.7	400	
50 Lb	CRX400T	28.3	12.8	47.4	21.5	75.7	34.3	8	203.2	12.5	317.5	19.75	501.7	400	
	CRX400TS	28.3	12.8	47.4	21.5	75.7	34.3	8	203.2	12.5	317.5	19.75	501.7	400	
90 Lb	CRX390T	49.5	22.5	92.5	42	142.0	64.4	9.5	241.3	12	304.8	31.75	806.5	350	
	CRX390TS	49.5	22.5	92.5	42	142.0	64.4	9.5	241.3	12	304.8	31.75	806.5	350	
<b>For Automotive Use</b>															
50 Lb	ARX134T	28.3	12.8	47.4	21.5	75.7	34.3	8	203.2	12.5	317.5	19.75	501.7	400	
	ARX134TS	28.3	12.8	47.4	21.5	75.7	34.3	8	203.2	12.5	317.5	19.75	501.7	400	

## PRO-SET® VACUUM PUMPS

Pro-Set has the product line breadth and depth to suit just about any HVAC/R job or fit any job site requirement you might have! Pumps are offered in a variety of single and dual stage models with numerous voltage, horsepower and free air displacement (CFM) options,



### DUAL STAGE VACUUM PUMPS

	VP2D	VP2DE	VP4D	VP4DE	VP6D	VP6DE	VPS6DE	VPS6DU	VP8D	VP8DE	VP10D	VP10DE	VP12D	VP12DE	VPS12DE	VPS12DU			
<b>Stage</b>	2								2										
<b>Ultimate Vacuum</b>	10 Microns								25 Microns										
<b>Refrigerant Class</b>	A1, A2						A1, A2, A3		A1, A2						A1, A2, A3				
<b>Dimensions (Inches)</b>	12.2" x 5" x 9.6"		13.1" x 5.5" x 10"						14.9" x 5.7" x 10.6"										
<b>Weight</b>	17.7 lb (8.0 kg)		22.1 lb (10.0 kg)		22.5 lb (10.2 kg)			29.8 lb (13.5 kg)		30.3 lb (13.7 kg)		30.9 lb (14.0 kg)							
<b>Free Air Displacement</b>	2 CFM @ 60Hz (48 l/m @ 50Hz)		4 CFM @ 60Hz (96 l/m @ 50Hz)		6 CFM @ 60Hz (144 l/m @ 50Hz)			8 CFM @ 60Hz (192 l/m @ 50Hz)		10 CFM @ 60Hz (240 l/m @ 50Hz)		12 CFM @ 60Hz (288 l/m @ 50Hz)							
<b>Motor Size (HP), RPM @ 50/60Hz</b>	1/3 HP (1440, 1720 RPM)		1/2 HP (2880, 3440 RPM)						2/3 HP (2880, 3440 RPM)		3/4 HP (2880, 3440 RPM)		1 HP (2880, 3440 RPM)						
<b>Voltage</b>	110-120V Or 220-240V @ 50/60Hz		220-240V, 50 Hz		110-120V Or 220-240V @ 50/60Hz		220-240V, 50 Hz		115V 60Hz		110-120V Or 220-240V @ 50/60Hz		220-240V, 50 Hz		110-120V Or 220-240V @ 50/60Hz		220-240V, 50 Hz		115V 60Hz
<b>Power Cord Connection to Pump</b>	Universal IEC Socket & Voltage Selector Switch	Universal IEC Socket	Universal IEC Socket & Voltage Selector Switch	Universal IEC Socket	Universal IEC Socket & Voltage Selector Switch	Universal IEC Socket	Hard Wired Schuko Plug	Hard Wired	Universal IEC Socket, Voltage Selector Switch	Universal IEC Socket	Universal IEC Socket, Voltage Selector Switch	Universal IEC Socket	Universal IEC Socket, Voltage Selector Switch	Universal IEC Socket	Hard Wired Schuko Plug	Hard wired			
<b>On/Off Power Switch</b>	Yes						Yes (Ignition-proof sealed starting components)		Yes						Yes (Ignition-proof sealed starting components)				
<b>Operating Temperature Range</b>	32°F to 125°F (0°C to 52°C)								32°F to 125°F (0°C to 52°C)										
<b>Pro-Set® Vacuum Pump Oil Capacity</b>	11.5 oz (330 ml)		15.5 oz (450 ml)		16 oz (470 ml)			29 oz (860 ml)		28 oz (830 ml)		27 oz (800 ml)							
<b>Gas Ballast Valve</b>	Yes								Yes										
<b>Intake Fittings</b>	SAE: 1/4", 3/8", ACME: 1/2"						SAE 1/4", 3/8", 1/2"		SAE 1/4", 3/8", 1/2"										
<b>Warranty (Years)</b>	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2				

Legend: VP = Vacuum Pump, VPS = Ignition Proof VP; 2,4,6,8,10,12 = CFM; D = Dual stage; A or E = 220-240VAC 50 Hz; J = 100VAC 50/60 Hz; U = 115VAC 60Hz, No Consonant After "D" = Dual Voltage 110-120VAC or 220-240VAC 50/60Hz.  
Refrigerant Classes: A1 (non-toxic, non-flammable); A2 (non-toxic, flammable); A3 (non-toxic, explosive)



**PRO-SET® VACUUM PUMP KEY FEATURES**

- All models are for use with class A1 (non-toxic, non-flammable), class A2 (non-toxic, low-flammable) refrigerants
- Air cooled, thermally protected motors encased in a durable aluminum housing
- Oil filled rotary vacuum pump cartridge construction
- Large oil-fill port with proprietary, mistfree exhaust cap
- Easily accessible oil drain port
- Large oil sight glass
- Multiple SAE and ACME intake fittings with check valve
- On/Off power switch
- Rubber lined handle, skid resistant rubber feet
- Gas ballast valve

**PRO-SET® SINGLE STAGE VACUUM PUMPS**

Pro-Set single stage standard size vacuum pumps provide a deep vacuum (down to 50 microns), with horsepower ratings from 1/3 to 1, and free air displacement from 2 CFM to 12 CFM. These pumps include a gas ballast valve and are offered in both single and dual voltage and have a voltage selector switch.

**PRO-SET® DUAL STAGE VACUUM PUMPS**

Pro-Set dual stage vacuum pumps are your premium solution for obtaining the deepest ultimate vacuum (10 to 25 microns, depending on model), the greatest range of horsepower (1/3 to 1) and free air displacement (from 2 CFM to 12 CFM) within the Pro-Set line. These pumps also include a gas ballast valve which speeds attainment of deep vacuum and are offered in both single and dual voltage models. All models are for use with Class A1 (non-toxic, non-flammable) and A2 (non-toxic, low flammable) refrigerants. The VPS Series with its sealed components is also for use with Class A3 (non-toxic, explosive) refrigerants and ammonia systems

**PRO-SET® DUAL OR SINGLE STAGE COMPACT VACUUM PUMPS**

The Pro-Set line of dual or single stage compact vacuum pumps provide an ultimate vacuum ranging from 15 to 100 microns, horsepower ratings from 1/5 to 1/4, and free air displacement from 2 CFM to 4 CFM. These pumps offer dedicated 115VAC or 220-240VAC operation and are hardwired with either NEMA 115VAC or 220-240VAC plugs. Best of all, these pumps feature some the smallest, lightest and most compact aluminum housings in the industry.

	SINGLE STAGE VACUUM PUMPS (Standard Size)			DUAL OR SINGLE STAGE VACUUM PUMPS (Compact Size)					
	VP2S	VP4S	VP6S	VPC2DU	VPC2DE	VPC2SU	VPC2SE	VPC4SU	VPC4SE
<b>Stage</b>	1			2		1			
<b>Ultimate Vacuum</b>	50 Microns			15 Microns		100 Microns			
<b>Refrigerant Class</b>	A1, A2			A1, A2					
<b>Dimensions (Inches)</b>	12.2" x 5" x 9.6"		13.1" x 5.5" x 10"	11.3" x 4.5" x 8.0"		9.1" x 4.5" x 8.0"		11.3" x 4.5" x 8.0"	
<b>Weight</b>	13.7 lb (6.2 kg)	15.0 lb (6.8 kg)	18.3 lb (8.3 kg)	12.1 lb (5.5 kg)		9.3 lb (4.2 kg)		11.0 lb (5 kg)	
<b>Free Air Displacement</b>	2 CFM @ 60Hz (48 l/m @ 50Hz)	4 CFM @ 60Hz (96 l/m @ 50Hz)	6 CFM @ 60 Hz (144 l/m @ 50 Hz)	2 CFM @ 60Hz (48 l/m @ 50Hz)				4 CFM @ 60 Hz (96 l/m @ 50 Hz)	
<b>Motor Size (HP), RPM @ 50/60Hz</b>	1/4 HP (1440 1720 RPM)	1/3 (HP) 2880/3440	1/2 HP (2880, 3440 RPM)	1/4 HP (2880 , 3440 RPM)		1/5 HP (2880, 3440 RPM)		1/4 HP (2880, 3440 RPM)	
<b>Voltage</b>	Dual (110-120V Or 220-240V @ 50/60Hz)			115V @ 60 Hz	220-240V @ 50 Hz	115V @ 60 Hz	220-240V @ 50 Hz	115V @ 60 Hz	220-240V @ 50 Hz
<b>Power Cord Connection to Pump</b>	Universal IEC Socket, Voltage Selector Switch, Nema 15 Plug			Hardwired, Nema 115V Plug	Universal IEC, Schuko Plug	Hardwired, Nema 115V Plug	Universal IEC, Schuko Plug	Hardwired, Nema 115V Plug	Universal IEC, Schuko Plug
<b>On/Off Power Switch</b>	Yes			Yes					
<b>Operating Temperature Range</b>	32°F to 125°F (0°C to 52°C)			32°F to 125°F (0°C to 52°C)					
<b>Pro-Set® Vacuum Pump Oil Capacity</b>	16 oz (470 ml)		19 oz (540 ml)	9 oz (250 ml)		9 oz (250 ml)		10 oz (300 ml)	
<b>Gas Ballast Valve</b>	No			No					
<b>Intake Fittings</b>	SAE: 1/4" & 3/16", ACME: 1/2"			SAE: 1/4", ACME: 1/2"					
<b>Warranty (Years)</b>	2			1					

Legend: VP= Vacuum Pump; C= Compact; 2,4,6= CFM; E= 220-240VAC 50 Hz; S= Single Stage; U= 115VAC, 50/60 Hz.  
Refrigerant Classes: A1 (non-toxic, non-flammable); A2 (non-toxic, flammable)

Legend: VP= Vacuum Pump; 2,4,6= CFM; S= Single Stage; Dual Voltage= 110-120VAC or 220-240VAC 50/60 Hz.  
Refrigerant Classes: A1 (non-toxic, non-flammable); A2 (non-toxic, flammable)

**ANTI-SIPHON VALVE KITS**

The CPS anti-siphon valve is an essential accessory to any vacuum pump application. The anti-siphon valve prevents the cross-contamination of vacuum pump oil and the compressor oil in the A/C or refrigeration system being serviced. Mixing of vacuum pump oil and compressor oil can cause premature failure in the A/C or refrigeration system. CPS makes three models that fit all CPS and other brands of vacuum pumps.



**VPAS4**

1/4" SAE female knurl nut



**VPAS8** Anti-Siphon Valve Kit

3/8" SAE female knurl nut



**VPASU** Anti-Siphon Valve Kit

1/4" SAE, 3/8" SAE, 1/2" -20 UNF female knurl nut

**TLOP** Hand Oil Pump



**AVCVAC** Vacuum Pump Cap Kit

Vacuum pump cap kit with chains on one common ring.



1/2" ACME

1/4" SAE

1/2" SAE

3/8" SAE

**Oil Port Caps**

Oil mist preventer exhaust port.

**VPXOMP** for 2-6 CFM Models

**VPXOMP2** for 8-12 CFM Models



**VPXJ220** Jumper Cord Kit

220 VAC jumper power cord for locations where 110 voltage is not available.



**PRO-SET® PREMIUM VACUUM PUMP OILS**

Pro-SetR Premium Vacuum Pump Oil is an extremely high quality, severely hydro-treated vacuum pump oil and can be used in pumps made by most manufacturers.

Vacuum pump oil should always be clean and free of contaminants such as moisture, acids, vapors, dirt etc., to extend the life of your pump. So, change it after each use with Pro-Set Premium Vacuum Pump oil (available in pints, quarts and gallons).



**VPOP12** (1 PINT, 12/CASE)



**VPOQ12** (1 QUART, 12/CASE)



**VPOG6** (1 GALLON, 6/CASE)

# TEST GAUGES & FUEL OIL TEST KIT



## GT1

- 0-30 Psi (0-2 bar)
- 1 Psi (0.05 bar) increments
- 3/4" FPT Brass Bell



## GT2

- 0-100 Psi (0-7 bar)
- 2 Psi (0.20 bar) increments
- 3/4" FPT Brass Bell



## GT4

- 0-30 Psi (0-2 bar)
- 1 Psi (0.05 bar) increments
- 1" FPT Brass Bell

## GAS TEST GAUGES

Test the integrity of new installations for pressure leaks by simply connecting the gauge, pressurize the system, using the supplied access port, and monitor the easy-to-read 3-1/2" (80 mm) gauge for potential pressure drops that would indicate a leak.



## GT3 Fuel Oil Test Kit

The **GT3** is a comprehensive test kit which includes the components necessary to test oil fuel pump performance while diagnosing related burner efficiency issues such as cleaner light-offs and coasting stops.



## INCLUDES

- 2-1/2" gauge, scale 30", 0-150 lbs
- 2-1/2" gauge, scale 30", 0-300 lb
- 12" hose 1/4" female swivel x 1/4" female 45° swivel
- 1/8 NPT x 1/4 Male SAE adapter
- 1/8 NPT x 1/4 Male SAE 90° adapter
- 1/4 NPT x 1/4 Male SAE adapter
- 1/4 NPT x 1/4 Male SAE 90° adapter
- Carrying Case



## **VG200W** Wireless Vacuum Gauge

The VG200W is a precision digital vacuum gauge for obtaining accurate pressure measurements during evacuations of HVAC and refrigeration systems. It is also ideal for obtaining vacuum data while conducting time, target, dynamic and static vacuum tests. The VG200W may be used as a standalone gauge, or it may be paired with a mobile device (using the free CPS Link app) for greatly enhanced jobsite capabilities.

### FEATURES:

- Large, 5 digit LCD display with low battery indicator
- Easy 2 button control (On/Off and Units)
- Select from 4 different vacuum units (at any time).
- Atmospheric to 0 micron pressure range
- Auto-Off after 10 minutes of no use
- Operates up to 20 continuous hours on one 9V alkaline battery (included)
- Compatible with all refrigerant gases (including ammonia)
- Field cleanable sensor
- Includes stainless steel T connector, hanger hook, vinyl storage case, and Quick Start Guide - all packed in a clear clamshell
- Designed and manufactured in the USA with US and foreign components

### WHEN USED WITH CPS LINK™ APP

- Choose from 8 different languages to work in
- Log vacuum test data (viewable in real time graphs)
- Client Lists- Enter and retain client information
- Job Checklist- Create and retain job reminders
- Job Tracker- Create and retain record of services performed
- Geolocation- Record where (global coordinates) and when (time stamp) jobs performed
- Set low and high alarms
- Cloud backup of data

## **PT200W** Wireless Pressure, Temperature Gauge

The PT200W is a compact, portable instrument for accurately measuring and calculating HVAC/R data such as pressure, SuperHeat, SubCool, and temperature differential (tH-tL) that are critical to properly servicing HVAC/R equipment. Use the PT200W as a stand-alone gauge or pair with a mobile device to set up, store or e-mail client and job lists, jobsite data, invoices and other convenient, time saving features.

### FEATURES:

- High & low temperature probe connections
- Take measurements directly from system access ports
- Large, 5 digit LCD display with low battery indicator
- Compatible with all refrigerant gases (including ammonia)
- Includes thermistor sensor (clamp, with 6 ft. lead), stainless steel T connector, hanger hook, double wall cloth storage case, and quick start guide - all packed in a clear clamshell
- Designed and manufactured in the USA with US and foreign components.



### WHEN USED WITH CPS LINK™ APP

- Client Lists - Enter and retain client information
- Job Checklist - Create and retain job reminders
- Job Tracker - Create and retain record of services performed
- Geolocation - Record where (global coordinates) and when (time stamp) jobs were performed
- Monitor readings remotely without refrigerant loss caused by manifolds and long hoses
- Share/Send Data - Conveniently e mail data to client, home office, others.
- Selectable Language - Choose from English or Spanish
- P/T tables for 105 refrigerants, and ability to add/delete
- Data Log - Pressure, temperature (tH, tL)
- Cloud backup of data



**VG200W**



**VG200**



**VG100A**



**PT200W**

<b>Accuracy</b>	+/- 10% Of Reading	+/- 10% Of Reading	+/- 10% Value Of Lighted LED	1% of reading ± 0.1PSIG (0.01 bar)
<b>Display Type</b>	Large, 5 digit LCD display with low battery indicator	5 digit LCD display with continual digital readout	9 High Intensity LEDs	LCD, 5 Digit
<b>Display Auto-Off</b>	After 10 minutes of no use	After 5 minutes of operation		10 minutes = default if no key pressed, no wireless connection, gauge not logging data
<b>Operating Vacuum Range</b>	Atmospheric pressure to 0 microns		Atmospheric pressure to 25 microns	-
<b>Operating Temperature Range</b>	-			23 °F to 149 °F (-5 °C to 65 °C)
<b>Maximum Working Pressure</b>	400 Psig			750 PSIG MWP, 3000 PSIG Burst
<b>Operating Temp Range</b>	Compensated (accuracy as stated): 32°F - 122°F (0°C - 50°C) Non-compensated: Add +/- 0.5% error for every °C outside compensated range			23 °F to 149 °F (-5 °C to 65 °C)
<b>Storage Temperature</b>	-22° F to 185° F (-30° C to 85° C)			-40 °F to 185 °F (-40 °C to 85 °C)
<b>Operating &amp; Storage Humidity</b>	0 - 95%, Non-condensing			
<b>Power Source</b>	One 9V Alkaline Battery (ANSI 1604AC – IEC 6LR61), included			
<b>Battery Life</b>	20 hr continuous use		18 hr continuous use	Up to 40 hours continuous use
<b>Battery Indicator</b>		Battery symbol with 3 segment Power Level Bar Graph	Symbol for 500 Microns Glows	Battery symbol with 3 segments
<b>Mechanical Connection</b>		Standard 1/4" female SAE refrigerant hose w/core depressor	1/8" NPT thread connection	Standard 1/4" female SAE refrigerant hose w/ core depressor



**AVT45**



**AVT45SS**



**VGXH**

**VGXC**



**PTXC Cloth Tool Pouch**

- Double wall
- Embroidered CPS logo
- 5.5" x 10" (13 x 26 cm)
- Zipper closure + carabiner

**GAUGE REPLACEMENT PARTS**

	<b>VG200W</b>	<b>VG200</b>	<b>VG100A</b>	<b>PT200W</b>
Brass Adapter <b>#AVT45*</b>	n/a	Included	Included	n/a
Stainless Steel Adapter <b>#AVT45SS*</b>	Included	Optional	Optional	Included
Swivel Hanging Hook <b>#VGXH</b>	Included	Included	Included	Included
Storage Case (Padded Vinyl) <b>#VGXC</b>	Included	Included	Included	n/a
Embroidered Cloth Case (Double Wall) <b>PTXC</b>	Optional	Optional	Optional	Included

\*1/4" SAE female knurl x 1/4" SAE male x 1/4" SAE male core

## VOLT-100 Wireless Clamp Power Meter

### FEATURES:

- Use with or without the CPS Link app. Connects to Apple and Android smartphones & tablets via Bluetooth
- Power factoring to determine true power consumption
- Data logging of electrical readings
- Utility data feed calculates actual cost/hour of appliances
- CAT. III 1,000 V rating
- True RMS measurements
- Non-contact voltage tester
- Maximum Voltage: 750 V AC; 1000 V DC
- Autorange and manual measuring
- Measuring range overload protection
- Display auto-off
- Display back light
- Automatic polarity indication
- Max/Min and relative measuring function

### MEASURE:

- Inrush current
- AC current
- Resistance
- Frequency
- Capacitance
- Duty cycle
- Diode connection

### INCLUDES:

- 39" (1 m) test leads
- Durable storage case
- 9V battery
- Owner's manual
- One year warranty

### SPECIFICATIONS

Data Logging	Up to 1,000 samples
Sampling Rate	1X/sec. for max of 16 mins., 40 secs.
Maximum Input Current	1000A AC
Maximum Input Voltage	750V AC (TRMS); 1000V DC
Wattage	3W/100W/4000W/10kW/100kW/750kW
AC Current	60A/600A/1000A
Inrush Current	60A/600A/1000A
Resistance	600Ω/6kΩ/60kΩ/600kΩ 6MΩ/60MΩ
Capacitance	9.999nF/99.99nF/999.9nF/9.999μF 99.99μF/999.9μF/9.999mF/99.99mF
Jaw Opening	1.6" (42mm) Max.
Size (H x W x D)	9.4" x 1.9" x 3.6" (238 x 50 x 92 mm)
Weight	0.92 lb (420 g)



Included items



Clamshell package


Bluetooth®

FC

RoHS

CAT III  
1000V

### Screen Shots (When Paired To A Mobile Device Running The CPS Link App)

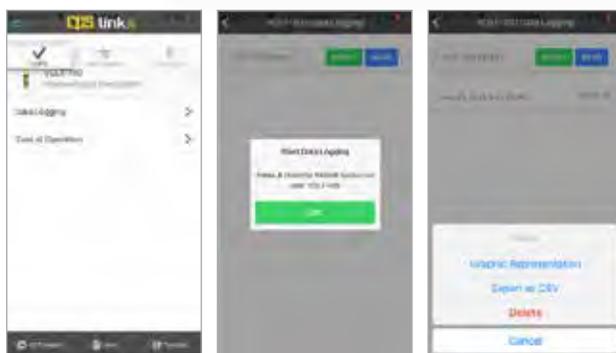

Data Logging



Cost Of Operation

**AC750 Digital Clamp Meter**

The **AC750** is a multi-functional AC/DC clamp meter and hosts an array of enhanced features such as ability to capture true inrush measurements and non-contact voltage detection.

- Versatile for testing AC/DC voltage, AC/DC current, resistance, capacitance, and frequency
- True RMS Measurement
- Inrush Current Measurement
- Relative Measurement
- Non-Contact Voltage Detection
- Auto & Manual Ranging
- Diode Open Voltage 3.2V
- MAX/MIN
- Data Hold
- Display 6000 Counts
- Jaw Opening: 1.6" (40mm)
- Auto Power Off
- Continuity Buzzer <50Ω
- Display Backlight
- Work Light
- Low Battery Display
- Secondary injection molded case, safety as per IEC1010 1000V CAT III



Clamshell package



Included items



Back view

**SPECIFICATIONS**

DC Voltage	60mV/600mV/6V/60V/600V
AC Voltage	60mV/600mV/6V/60V/600V
DC Current	60A/600A/1000A
AC Current	60A/600A/1000A
Inrush Current	60A/600A/1000A
Resistance	600Ω/6kΩ/60kΩ/600kΩ 6MΩ/60MΩ
Capacitance	10nF/100nF/1000nF/10μF 100μF/1000μF/10mF/100mF
Frequency (A)	100Hz/1000Hz
Frequency (V)	100Hz/1000Hz/10kHz
Frequency (Hz/Duty)	10Hz/100Hz/1000Hz/10kHz 100kHz/1000kHz/10MHz
Duty Cycle	0.1%-99.9%
Battery	9V battery
Dimensions (W,H,D)	8.8" x 3.4" x 1.3" (225 mm x 86 mm x 33 mm)
Weight	0.70 lb (320 g)

**DMXTL 1000V Cat 3 Test Leads**

- Captures True Motor In-Rush Current
- Includes Built-in Data Logging with Software

**REPLACEMENT PARTS**

DMXTL | For AC750 and VOLT-100

**DM350 TECH-SET™ Auto-Ranging Digital Multimeter Cat Iii 600V**

The **DM350** is a Multi-Functional Meter and is designed to international safety standard IEC1010 CAT III 600V. The **DM350** is encased in a secondary injection mold and supports such features as auto ranging, data hold and maximum value measurement.

**SPECIFICATIONS**

Display	4 digit large character LCD	(with optional clamp)	200/2000A (0.1mV/0.1A) ±1.2%
Range Control	Auto range mode		
Battery	(2) 1.5V AA batteries	AC Current	200 μ / 2000 μ / 20m / 200mA ±1.5%, 2/10A±3.0%
Dimensions	158 x 74 x 31mm	(with optional clamp)	200/2000A (0.1mV/0.1A) ±1.5%
Weight	Approx. 220g (including batteries)	Resistance	200 / 2k / 20k / 200k / 2M ± 1.2%; 20M ± 2.0%
DC Voltage	200m / 2 / 20 / 200 / 600V ±0.7%	Temperature	-20°C - 1000°C ± 3.0%, 0°F - 1800°F ± 3.0%
AC Voltage	200m / 2 / 20 / 200 / 600V ±0.7%	Capacitance	20n / 200n / 2μ / 20μ / 200μ / 2000μF ± 4.0%
DC Current	200μ / 2000 μ / 20m / 200mA ±1.2%, 2/10A±2.0%		

**SM150 Sound Level Meter**

A professional grade, hand held, lightweight sound level meter for measuring noise levels from 35 to 130dB. Common applications include monitoring sound output from HVAC/R compressors, blowers, health and safety requirements, offices, factory machinery, airports, auditoriums, studio acoustics, etc. Features switches for Hi/Lo dB, slow/fast/impulse, and A & C Weighting. Includes a large, 4 digit LCD display, maximum hold (captures & holds maximum noise level), Over/under range indicator, peak and average response settings. Includes a 3.5 mm output jack for downloading AC or DC signals to a frequency analyzer, level recorder, FFT analyzer, graphic recorder, etc. Kit includes instruction manual, foam windscreen, 3.5 mm plug, calibration screwdriver, 9 V battery, foam padded carrying case. Factory calibrated. CE approved. Meets or exceeds ANSI S1.4 Type 2; IEC 61672-1 Class 2.

**SM150 SPECIFICATIONS**

Frequency Range	20 Hz ~ 8KHz	Maximum Hold	Hold readings, with decay , 1 dB/3 minutes
Measuring Level Range	35 ~ 130 dB	Calibration	Electrical calibration via internal oscillator (1 KHz) sine wave
Frequency Weighting	A/C	AC Output	0.6 Vrms at FS (full scale), output impedance approx. 5KΩ
Time Weighting	Fast (125 mS), Slow (1 sec.) Impulse (35 mS)	DC Output	10mV/dB, output impedance approx. 5KΩ
Microphone	1/2" Electret Condenser	Power Supply	One 9V battery
Display	LCD (4 Digits)	Power Life	Approx 50 hr (alkaline)
Resolution	0.1 dB	Operating Temperature Range	32° F to 104°F (0°C to 40°C)
Display Period	0.5 sec.	Operating Humidity Range	25% to 90% RH
Level Ranges	Lo (35-95dB): Hi (65-130dB)	Storage Temperature	14°F to 140°F (-10°C to 60°C)
Accuracy	±1.4dB (Under Reference Conditions)	Storage Humidity	10% to 70% RH
Dynamic Range	65 dB	Dimensions (L x W x H)	Inch: 9.4" x 2.7" x 0.98" mm: 240 x 68 x 25
Alarm Function	"OVER" displays when input out of range	Weight	7.5 oz (215 g)
Weight	12.3 oz (350 g)		
Mounting Nut	1/4" x 20		
Dimensions (LxWxH)	Inch: 6.6" x 3.5" x 1"; mm: 168 x 88 x 26		

# TEMPERATURE & SYSTEM MEASUREMENT

## SH450 Multi-Function Superheat Thermometer & System Analyzer

The **SH450** system analyzer is a versatile diagnostic tool for accurately measuring and evaluating the performance of today's advanced HVAC/R systems. Optional accessory probes are available and offer the convenience of interchangeable use with other CPS manufactured products including our advanced line of digital manifolds.

### FEATURES:

- Integrated 90+ refrigerant PT (pressure/temperature) table
- Four discrete temperature channels
- Superheat and subcool measuring functions
- Displays bubble and vapor saturation temperatures
- Direct relative humidity and wet bulb measurements
- Temperature differential with min / max memory
- High accuracy silicon humidity transducer probe port
- Large 4-digit backlit display
- Calibrated to NIST traceable standards

### INCLUDES

General purpose probe TMX2G

Clamp-on surface probe TMX3C

9V alkaline battery and owner's manual



## TM360 SERIES 4 Station Thermo-Psychrometer

**TM360** Series can accommodate all your temperature, humidity, dry/wet bulb and dew point measurements. **TM360** incorporates 4 discrete temperature ports capable of min/max and memory functions including temperature differential between any 2 of the 4 available ports. A dedicated special purpose port accommodates an optional humidity transducer probe for fast and accurate measurements during superheat calculations. A generous probe storage area is provided to contain all your job specific probes.

### FEATURES:

- High accuracy silicon humidity transducer probe port
- Large 4-digit, easy-to-read, backlit display
- Min/Max and memory functions
- Temperature differential between any 2 of the 4 temperature ports
- Direct relative humidity and wet bulb measurements
- Calibrated to NIST traceable standards
- Integrated battery eliminator jack
- Rugged polyethylene carrying case

### INCLUDES

TM360 includes accessory probes TMX2A, TMX2G, TMX2S

TM360C includes accessory probes TMX2A, TMX2S, TMX3C



ACCESSORIES & SPECIFICATIONS		FOR USE WITH SH450, TM360 AND TM360C			FOR USE WITH			
		Item	Description	Common Uses	Qty	Operating Temperature Range	TM360	TM360C
	<b>TMX2A</b>	Moving Air Probe, 15' (4.5 m) Lead	Air: Ducting, registers, air movement across condensers, ambient air	1	-40°F to 221°F (-40C to +105°C)	Yes*	Yes*	Yes
	<b>TMX2G</b>	General Purpose Probe, 15' (4.5 m) Lead	Surface, Air, Liquids: Copper pipe, ambient air, RH wet sock method	1	-40°F to 257°F (-40C to +125°C)	Yes*	n/a	Yes*
	<b>TMX2GA</b>	General Purpose Air Probe, 15' (4.5 m) Lead	Air, Surface, Liquids: Ambient air, ducting, registers, air movement across condensers.	1	-40°F to 257°F (-40C to +125°C)	n/a	n/a	Yes
	<b>TMX2P</b>	Puncture Probe, 15' (4.5 m) Lead	Surface, Liquids (Shaft Only): Internal temperatures of frozen materials, air ducts	1	-40°F to 257°F (-40C to +125°C)	Yes	n/a	Yes
	<b>TMX2S</b>	Velcro Strap Pipe Probe, 15' (4.5 m) Lead	Surface: temperatures of copper tubing	1	-40°F to 257°F / -40°C to +125°C	Yes*	Yes*	Yes
	<b>TMX3C</b>	Clamp-On Surface Probe, 15' (4.5 m) Lead	Surface: temperatures of copper tubing	1	-40°F to 221°F (-40C to +105°C)	Yes	Yes*	Yes*
	<b>TMX2RH</b>	Relative Humidity / Dewpoint Probe	Specialty RH Probe: Measure indoor air quality, set/troubleshoot humidity devices	1	-40°F to 194°F (-40C to +90°C)	For use with TM150 and TM250		
	<b>TMX3RH</b>	Relative Humidity / Dry Bulb / Wet Bulb / Dew Point Probe	Specialty RH Probe: Measure indoor air quality, set/troubleshoot humidity devices	1	-40°F to 194°F (-40C to +90°C)	Yes	Yes	Yes
	<b>TMX3WB</b>	Wet Bulb Socks	for Use With TM360	6	-40°F to 194°F (-40C to +90°C)	Yes	Yes	n/a
	<b>TMX3PS</b>	AC Adapter for 100 to 240V (40-60 Hz)- USA Plug	for TM360, SH450	1	32°F to 140°F (0 C to +60°C)	Yes	Yes	Yes

\*Indicates accessory is included with the model

**TMINI12 Non-Contact Thermometer**

The **TMINI12** infrared thermometer provides easy, instant temperature measurement over a wide range of applications. **TMINI12** offers convenient one-hand operation, 8 point laser sighting, a backlit LCD display, °F/°C selection, automatic power off feature, built-in LED light, K-Type input for use with optional accessory temperature probes.

Use the **TMINI12** to quickly and easily measure temperatures of registers, ductwork, furnaces, evaporators, condensers, compressors, relays, manifolds, radiators, exhaust systems, thermostats, bearings and more. Includes carrying case and 9V alkaline battery.

**SPECIFICATIONS**

Temperature Range	-76°F to 932°F (-60°C to 500°C)
D:S (Distance to Spot Size)	12:1
Emissivity	Pre-set at 0.95 - adjustable
Accuracy	±2°C (±4°F) or ±2% of reading
Display	Digital Backlit LCD
Resolution	1°C/°F
Batteries	2 AAA
Warranty	1 year



Built in LED Light



Used as seen above on the CPS TMINI12 and is compatible with any other instrument with a K Type input.


**TMXSK90 K-Type Temperature Probe**

The **TMXSK90** is the fastest and most accurate handheld K-type surface probe providing accurate readings in less than 5 seconds. The sensor is made from flat-spring ribbons of thermocouple material for contact on uneven surfaces. A square, ribbed handle for grip and a 3' coiled lead for durability and long reach. The exposed junction provides for fast response and is compatible with any other instrument with a K-type input.

- K-Type Surface Probe (Angled, 90 Degree Head)
- Max Temp: 752°F (400°C)



Coiled lead



Flat-spring ribbons




K-type accessory probe



### **TMXKBEAD** Temperature Probe

The **TMXKBEAD** is a standard K-type bead probe ideally suited for getting fast results when measuring temperature in a variety of media. This 36" long (1 m) probe provides accurate readings in less than 5 seconds.

- K-Type Flexible 36" (1 m) Probe
- Max Temp: 400°F (204°C) Min Temp: -58°F (-50°C)

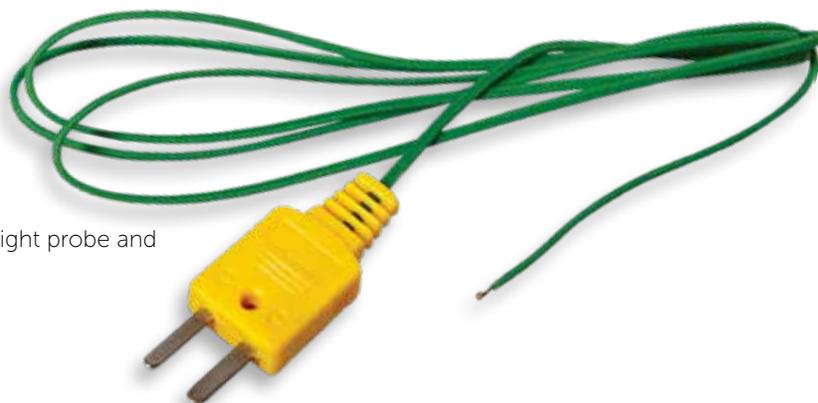

### **TMXSK** Temperature Probe

Identical to the **TMXSK90**, but with a straight probe and round, ribbed handle.

- K-Type Surface Probe (Straight Head)
- Max Temp: 752°F (400°C)



### **TMAP**

#### **Analog Pocket Thermometer**

- Fahrenheit scale
- 1" dial and stainless steel probe and pocket clip
- 0°F to 220°F
- 5" (127 mm)



### **TMAPC**

#### **Analog Pocket Thermometer**

- Celsius scale
- 1" dial and stainless steel probe and pocket clip
- -40°C to 80°C
- 5" (127 mm)



### **TMDP**

#### **Digital Pocket Thermometer**

- Celsius scale
- -58° to 302°F (-50° to 150°C)
- 5" (127 mm)

Using your smartphone as a display, the ABM EasyHood from CPS takes accurate and affordable real-time airflow readings in a matter of seconds.

# BECOME AN AIRFLOW PRO AND EARN MORE PROFITS!

## ABM HOOD



Up to 12" x 12" vents



Up to 24" x 24" vents with Expansion Hood



Low airflow adapter plate



### Capture more than just airflow readings with the ABM EasyHood™.

- Use smartphone and CPS Link™ app to measure, display, store and send data
- Measures temperature, wet bulb, dew point and relative humidity (ABM-200)
- Easy operation with online guidance and visual instruction

### ABM-HOOD-200 includes:

- ABM-200 Airflow Environmental Meter
- Airflow capture hood with expansion hood
- Integrated vortex air straightener
- Low airflow adapter plate
- Protective storage case

### ✂ Replacement Parts

ABMHOOX1	Phone Base Door
ABMHOOX2	Rubber Seal
ABMHOOX3	Expansion Base
ABMHOOX4	Extension Fabric
ABMHOOX5	Extension Pole Assembly
ABMHOOX6	Low Airflow Plate



**ABM-100**


**Airflow Meter**

The ABM-100 easily plugs into a smart device and instantly converts air speed into air volume and records the data.


**Accurately measures airflow in:**

Linear feet per minute, cubic feet per minute, cubic meters per hour, linear meters per second

- Portable, fits in your pocket
- Easy to use — no math or formulas to remember
- Automatically generates and emails detailed reports
- Rugged packaging serves as a reusable storage case
- 2.5" H x 1.75" W x .75" D
- Plastic storage case with color sleeve

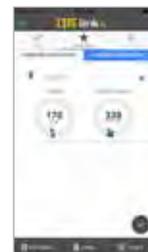

Data Displayed in Current Conditions Screen

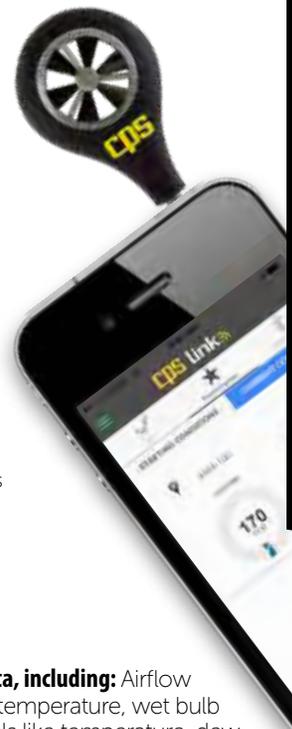

Data Displayed in Current Conditions Screen

**ABM-200**

**Airflow and Environmental Meter**

**Measures and records a variety of data, including:** Airflow velocity, airflow volume, dry bulb temperature, wet bulb temperature, relative humidity, feels like temperature, dew point, air density, wind speed/direction/gusts, indoor vs. outdoor conditions and barometric pressure.

- On-screen guidance ensures accurate readings
- Rugged housing with 1/4" 20 mount fitting for hands-free use
- Attach to the EXP-64 – a 64" aluminum extension pole (sold separately) to take readings without using a ladder
- Connects over 20X faster than traditional Bluetooth
- Emails personalized, professional reports
- 3.3" H x 1.8" W x 0.6" D
- Plastic storage case with color sleeve

**TS-100**

**Temperature and Humidity Data Logger**

Easy to use and accurate, produces readings for: dry & wet bulb temperatures, relative humidity, feels like temperature, dew point

- Data Log stores the last 20,000 temperature and humidity readings that can be uploaded to your smart device for review and to generate professional reports
- Increases productivity, safety & enhances professionalism
- Includes a 1/4"-20 metal D-ring connector, key chain split-ring and alligator clip for mounting in various configurations
- Can be mounted on the EXP-64 Extension Pole & TRI-MIN Tripod – no ladder needed!
- Emails professional personalized reports
- Rugged, weather resistant housing
- Plastic storage case with color sleeve



CPS Link™ U.S.  
Patent # 9,043,161



Data Displayed In Starting Conditions Screen

Reading Increments	Data Log Capacity	
	Hours	Days
5 Seconds	28	1.2
30 Seconds	167	7
1 Minute	333	14
5 Minutes	1,667	69
30 Minutes	10,000	417
Hourly	20,000	833
Daily	480,000	20,000

**TS-100-6PK**

**Temperature and Humidity Data Logger**

Our convenient 6-pack data logger kit makes it easy and cost effective to deploy multiple meters. Each meter can be individually named to make tracking data easy.

**SPM-K1**

**Static Pressure Meter & Probe Kit**

The SPM-K1 kit is the must-have smart tool that combines our popular SPM-100 manometer with our PRB-KIT and a brass gas fitting. This powerful and accurate dual port manometer harnesses the power of the smartphone to perform tests quickly, easily and accurately. Simple, intuitive and accurate readings for: static pressure, pressure differential, indoor vs. outdoor pressure, total external static pressure, gas pressure.

- Imports local weather data to ensure accurate testing
- Rugged housing with magnetic back for hands-free operation
- Two color coded (Red and Blue) stainless steel probes
- Two 6 ft. (1.8 m) rubber tubes
- One gas manifold fitting (brass)
- Plastic storage case with color sleeve



CPS Link™ U.S.  
Patent # 9,043,161




**SPM-100**

**Static Pressure Meter**

Harnessing the power of your smartphone or tablet with a free app that provides on-screen guidance, the SPM-100 takes the guesswork out of accurately measuring static pressure! Simple, intuitive, and accurate readings for: static pressure, pressure differential, indoor vs. outdoor pressure, system external static pressure.

- Automatically imports local weather data based on GPS location
- Easily emails professional, detailed reports
- Rugged, weather resistant housing with hands-free magnetic holder
- Color display box with color sleeve

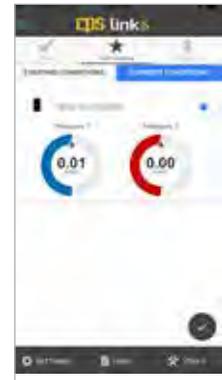

**PRB-KIT**

**Static Pressure Probe Kit**

Accurately measure and record: Static pressure, pressure differential, indoor/outdoor pressure, system external static pressure, gas pressure test.

- Includes:
- Two color coded (lower case Red and Blue) stainless steel probes with magnetic bases
  - Two 6 ft. (1.8 m) rubber tubes
  - One gas manifold fitting (brass)
  - Plastic storage case with color sleeve



## ABMHBK & ABMHBV Series

### Home Balancing Valves

Traditional airflow balancing devices cannot respond to system changes. Too much ventilation means wasted energy, while too little ventilation leads to poor air quality.

CPS Home Balancing Valves are designed to maintain a constant, accurate airflow volume when installed in residential forced air ductwork. Each Home Balancing Valve has an engineered damper calibrated to automatically adjust to varying pressures, which gives the airflow valves true pressure independence. This leads to greater comfort, saves energy and improves indoor air quality.



#### ABMHBK4

##### Home Balancing Valve Kit

(4" Balancing Valves)  
10 valves per color box

#### ABMHBK5

##### Home Balancing Valve Kit

(5" Balancing Valves)  
10 valves per color box

#### ABMHBK6

##### Home Balancing Valve Kit

(6" Balancing Valves)  
10 valves per color box

10 Pack Boxes



#### ABMHBV4

##### Home Balancing Valve

(4" Balancing Valve)  
1/color box. 6/case

#### ABMHBV5

##### Home Balancing Valve

(5" Balancing Valve)  
1/color box. 6/case

#### ABMHBV6

##### Home Balancing Valve

(6" Balancing Valve)  
1/color box. 6/case

Single Pack Boxes



## Features

- Eliminates hot/cold areas in your home
- Provides greater comfort
- Reduces energy use
- Improves indoor air quality
- Easy to set airflow volumes

## Applications

- Precise airflow regulation in forced air ventilation systems in residential buildings.
- Automatic balancing of supply grilles in residential forced air heating and cooling systems.
- Any HVAC application with a static pressure between 0.2 and 2.0 inches w.c.
- For temperatures ranging from 25° to 150°F (-4° to 65°C)

## Typical Uses

Multi-family condos, apartments, hotels, dorms, state energy efficiency programs, housing projects, assisted living facilities.

Download the  
CPS Link™ App



Download on the  
App Store



GET IT ON  
Google Play

Use the convenient "Room Airflow Calculator" within the CPS Link app to help determine the size of Home Balancing Valve to use in each room of your home.



Home Balancing Valves constrain airflow to precise factory calibrated volumes as marked on the front of the valve.



Install Home Balancing Valve in air supply ductwork behind grilles

Anti-microbial agent to prevent mold and bacteria.



Raised rubber gasket seals into round ductwork.

20 or 24 adjustable CFM set points.



**Airflow Direction**

**Lab Calibrated**

Airflow lab-tested at each CFM set point.

**SPECIFICATIONS**

	<b>ABMHBK4</b> (10 Pack Kit) <b>ABMHBV4</b> (Single Pack)	<b>ABMHBK5</b> (10 Pack Kit) <b>ABMHBV5</b> (Single Pack)	<b>ABMHBK6</b> (10 Pack Kit) <b>ABMHBV6</b> (Single Pack)
Outside Diameter (Rubber Gasket)	3.8" (97mm)	4.8" (122mm)	5.7" (149 mm)
Height	3.5" (88mm)	3.8" (122mm)	5.2" (134mm)
Weight (One Valve)	.203 Lb (90g)	.437 lb (200g)	.609 Lb (280g)
Number of Unique Set Points (CFM)	20	20	24
Airflow Lab Tested at Each Set Point	Yes		
Airflow Range (CFM)	25-130 CFM	25-130 CFM	50-275 CFM
Airflow Accuracy Range	±10% Within 0.2 to 2.0 w.c.		
Temperature Range (Suitable Applications)	25F to 150F (-4C to 65C)		
Static Pressure Range	0.2 to 2.0 Inches w.c.		
Rubber Gasket (Insertion Into Round Duct)	Reversible- Use on either end		
Blade Damper for Quiet Operation	Yes		
Anti-Microbial Plastic Compound	Yes		
UL Tested & Classified	UL 2043		
Warranty	1 Year		

**IAQP Smart Indoor Air Quality Meter**

We spend 90% of our time indoors where air is 2 to 5 times more polluted than outdoor air. The IAQP Indoor Air Quality Meter is a compact, professional, SmartAir instrument with 4 distinct sensors that will measure indoor air quality, summarize problem conditions and send a customizable, consumer friendly quote with recommended solutions to a smart device running the CPS Link™ app.

**4 Sensors Inside The IAQP:**

**VOCs** - Detects the presence of Volatile Organic Compounds (chemical pollution) commonly given off by interior building materials such as carpet, paint, upholstery, vinyl flooring, cleaning products, cosmetics, burning wood etc.

**NDIR (Non-Dispersive Infrared)** - Detects combustible gases (methane, propane, butane, hydrogen, etc.) and non-combustible inert gases (carbon dioxide, nitrogen, etc.) any of which may pose a threat to humans if found in high enough concentrations inside a home.

**Particulate Matter (2.5PM-10PM)** - Measures the amount of inhalable particle matter that can penetrate the lungs and cause health problems. Examples include dust, pet dander, pollen and other airborne allergens with a diameter below 2.5 and 10 microns.

**Temperature, Humidity and Pressure** - Measures indoor air temperature (in °F or °C), relative humidity (%) and atmospheric pressure (in Hg, atm, kPa, or mb units).

**Operation**

Pair the IAQP to a wireless smart device running the CPS Link app. Place it on an interior surface to begin air diagnostics. LED lights on the housing will change color (Red-Yellow-Green) based on air quality conditions found. The CPS Link app will create a customizable, consumer friendly report showing analysis results. The report can be viewed on screen, printed or e-mailed as a PDF.

The IAQP is great for HVAC pros that also want to become Indoor Air Quality pros! Includes a 6 ft (1.8m) USB cord, adapter plug, carrying case and instructions.



**SPECIFICATIONS**

Size (HWD)	5" x 3.5" x 2.9" (12.7 x 8.9 x 7.4 cm)
Weight	Approximately 1 lb (0.45 kg) with storage case



## SMART TOOL ACCESSORIES

### EXP-64

#### Telescopic Extension Pole

Take accurate airflow readings without using a ladder. Mount an ABM-200 or TS-100 to the 1/4"-20 universal threaded end to obtain fast, easy readings from vents mounted on ceilings, high walls or other hard to reach places.

The EXP-64 has a rubber grip handle and telescopes from 18" to 64". It has a second 1/4"-20" threaded fitting on the handle end to allow the EXP-64 to be mounted on a floor tripod.



Attach the ABM-200, or TS-100 to the end of the EXP-64, to access hard-to-reach areas.



Thumbwheel for attaching/removing threaded universal end



The EXP-64 can be mounted on tri-pods for longer term analysis of airflow from wall or ceiling vents

### TRI-MIN

#### Mini-Tripod

Makes extended environmental condition readings easy. This mini tripod has a 1/4"-20 top fitting to attach the TS-100 or ABM-200. It adjusts from 6-8" in height and is collapsible for compact storage.



# MERCHANDISING SMART TOOL PRODUCTS IN YOUR SHOWROOM



Gondola end caps are an excellent way to display Smart Tool products in your showroom. A standard 60" x 36" x 16" (1.5m x 0.91m x 0.4m) end cap holds a large quantity of Smart Tool products (see chart below) and makes them visible and accessible to your customers.

Thirty percent of all store sales come from end-of-aisle displays, so contact your CPS sales representative to purchase Smart Tool products for your showroom!

### WIRELESS SMART TOOLS FOR A TYPICAL END CAP AS SHOWN

Product	Qty
<b>ABM-HOOD</b> Airflow Meter	2
<b>ABM-100</b> Airflow Meter	6
<b>ABM-200</b> Airflow And Environmental Meter	6
<b>TS-100</b> Temperature and Humidity Data Logger	6
<b>TS-100-6PK</b> Temperature and Humidity Data Logger	3
<b>SPM-K1</b> Static Pressure Meter & Probe Kit	3
<b>SPM-100</b> Static Pressure Meter	3
<b>PRB-KIT</b> Static Pressure Probe Kit	3
<b>IAQP</b> Smart Indoor Air Quality Meter	2
<b>EXP-64</b> Telescopic Extension Pole	4
<b>TRI-MIN</b> Mini-Tripod	4
<b>MD100WVHE</b> Digital Manifold	3
<b>CC220EW</b> Enhanced Wireless Scale	3



## BLACKMAX®

### WIRELESS MD SERIES

BLACKMAX® wireless digital manifolds combine industry-leading accuracy with a rugged nylon water-resistant housing, durable elastomeric keypad and large backlit LCD display. For use with or without CPS Link™ app— can work as a standalone device.

#### Best-in-class accuracy

- Pressure: 1% of reading pressure
- Temperature: superior thermistor sensors for +/- 0.2°C (+/- 0.4°F) accuracy
- Vacuum: direct system attachment achieves +/- 10 microns from 0 to 25,000 microns

#### Rugged Design

- Water-resistant, high-strength, glass-filled nylon housing
- Precision machined anodized aluminum manifold body
- Proprietary Vortech valve system certified to 10 microns
- High-impact polycarbonate LCD window
- Advanced sight glass design

#### Simplicity & Versatility

- Preloaded with over 100 refrigerants with quick access to your favorite five
- R744 (CO2 Sub-critical application only)
- One-touch access to your 5 favorite refrigerants

#### Full System Measurement

- 2 Pressures, 2 temperatures and vacuum (using MDXVG accessory)
- Vacuum hold and pressure hold test functions
- Simultaneously displays:
  - HI and LO pressures, superheat and subcooling
  - HI and LO pressures, T1 and T2
  - HI and LO pressures, saturation T1 and saturation T2
  - HI and LO pressures, displays T1, T2 and Delta T

### DIGITAL MD SERIES

BLACKMAX® digital manifolds have the same features as the wireless models, without the patented built-in sensor technology access to CPS Link™.



CPS® link™



CPS Link allows HVAC/R technicians the convenience of running and monitoring a BLACKMAX digital manifold (from up to 300 feet away), while also providing additional capabilities not found in non-wireless versions.

- Fast, convenient touch screen control
- Comprehensive views of system measurements
- Graphical depictions of test functions
- Data logging
- Geolocation data and more
- Perform and monitor system measurements—in real time without the need to physically touch the manifold
- Color scheme change according to refrigerant
- Pressure or vacuum tests can be saved, stored or emailed as a graph
- Select from different languages to work in.



**MD50**  
Digital 2 valve series




**MD100**  
Digital 4 valve series

				Includes: (items may be purchased separately)				Optional Accessories
				Two thermistor sensors with 6' leads <b>MDXCP</b>	Three 5' Black & Chrome Ball Valve Charging Hoses <b>HP5BKKEZ3</b>	One 5' Heavy Duty Black & Chrome Vacuum Hose <b>HV5Z</b>	Vacuum Gauge Accessory Kit* <b>MDXVG</b>	Rechargeable NiMH Battery and Universal Plug Kit** <b>MDXBK</b>
Wireless Digital		Digital		   				
2 Valve	4 Valve	2 Valve	4 Valve					
MD50W	MD100W	MD50	MD100	✓	✗	✗	✗	Soft Case For All MD Series MDXSC
MD50WHE	-	MD50HE	-	✓	✓	✗	✗	
-	MD100WHE	-	MD100HE	✓	✓	✓	✗	
MD50WVHE	MD100WVHE	MD50VHE	MD100VHE	✓	✓	✓	✓	

\*Includes Vacuum Accessory & 1 AVT45 1/4" SAE Brass Tee Connector. \*\*Includes 1 Universal Charger With 5' Cord; 4 rechargeable NiMH batteries, 1 U.S. Plug, 1 Euro Plug, 1 Australia/New Zealand/China Plug, 1 UK/Ireland/Singapore/Hong Kong Plug.



Vacuum Gauge Accessory Port



Connections For Thermistor Sensors



9V DC Charger Port

High side pressure range	-14.5 to 800.0 PSIG (-1.0 to 55 bar)
Low side pressure range	-14.5 to 800.0 PSIG (-1.0 to 55 bar)
Pressure reading accuracy	+/- 1% of reading or +/- 0.5 PSIG (+/- 0.05 bar)
Pressure reading resolution	0.5 PSIG (0.05 bar)
High and low side burst pressure	1500.0 PSIG (103.4 bar)
High side temperature range	-58.0 °F to 302 °F (-50 °C to 150°C)
Low side temperature range	-58.0 °F to 302 °F (-50 °C to 150°C)
Temperature reading accuracy	+/- 0.36 °F (+/- 0.2°C)
Vacuum indication accuracy	+/- 10 microns (requires MDXVG accessory)
SH, SC & saturation temperature accuracy	+/- 0.5°F (+/- 0.3°C)
Instrument working temperature	-4.0 °F to 122°F (-20°C to 50°C)
Communication range (with CPS Link™)	300 ft. (max) (Depends on device capabilities)
Instrument working RH range	0% to 100% non-condensing
APO (Automatic Power Off)	10 minutes. Can be disabled by user.
4 valve size (L x H x W)	8.1" x 3.5" x 7.0" (20.5 cm x 8.9 cm x 17.8cm)
4 valve weight	3.3 lb. (1.5 kg)
2 valve size (L x H x W)	8.1" x 2.5" x 7.0" (20.5 cm x 6.4 cm x 17.8cm)
2 valve weight	3.0 lb. (1.4 kg)
Display Life using 4 industrial alkaline AA batteries (included)	Backlight full ON: 25+ hrs. continuous duty
	Backlight full OFF: 60+ hrs. continuous duty
Display Life using 4 Rechargeable NiMH AA batteries (not included)	Backlight full ON: 20+ hrs. continuous duty from full charge
	Backlight full OFF: 50+ hrs. continuous duty from full charge

Sensor Type	Self - heated thermistor bridge with integral temperature compensation from 0 to 50 °C (32 to 122 °F).	
Display Pressure Range	AUTO-RANGING SCALES:	
	0 to 99 microns	1 micron resolution
	100 to 990 microns	10 micron resolution
	1000 to 9900 microns	20 micron resolution
Accuracy	10000 to 25000 microns 50 micron resolution	
	+/- 10% of reading or +/- 10 microns, whichever is greater	
Operating Temperature Range	Compensated (accuracy as stated): 0°C TO 50°C (32°F TO 122°F)	
	Non-compensated (add +/- 0.5% of reading error for every °C outside compensated range): -10 to 0°C (14 to 32°F)	
Operating and Storage Humidity	0 to 95%, non-condensing	
Storage Temperature	-40 to 85°C (-40 to 185°F)	

# BLACK & CHROME MANIFOLDS



## TRIPLE-SEAL™ VALVES

Our proprietary Triple-Seal Valve System is engineered for superior performance using an innovative three Neoprene™ o-ring design

- Back-seating o-ring seals valve nut when fully open
- Floating nylon sealing disk
- Valve stems retract fully to provide maximum flow
- Mirror-like port finish for smooth valve movement



## VORTECH® VALVES

Superior performance that actually can be measured!

The Vortech Deep Vacuum Valve System is an advanced diaphragm valve system, certified 15 micron vacuum rating using precision-machined virgin Teflon™ core provides a full, unrestricted refrigerant flow and allows a light touch valve operation.

Manifold Body			Refrigerant(s)					Gauges					Manifold and Gauge Set			
Description	Valves	Fittings	R-22	R-134 A	R-404 A	R-407 C	R-410 A	Gauge Size	Accuracy	Scale	Pressure	Low Gauge	High Gauge	Manifold and Gauge only (No Hoses)	With (3) 5' Premium Black & Chrome Hoses	With (3) 5' with Ball Valve
BLACK AND CHROME VORTECH™ VALVE SERIES	2	1/4" SAE 45°	●	●	●		●	3-1/8"	Class 1.0	°F	Psi	RGH4L	RGH4H	-	MV2H4P5Z	MV2H4P5EZ
			●			●	●									
	4	1/4" SAE 45°	●	●	●		●	3-1/8"	Class 1.0	°F	Psi	RGH4L	RGH4H	-	MV4H4P5Z	MV4H4P5EZ
			●			●	●									
BLACK AND CHROME TRIPLE SEAL™ SERIES	2	1/4" SAE 45°	●	●	●		●	2-1/2"	Class 1.6	°F	Psi	RGH5L	RGH5H	MBH5Z	MBH5P5Z	MBH5P5EZ
							●									
	2	1/4" SAE 45°	●	●	●		●	3-1/8"	Class 1.0	°F	Psi	RGH4L	RGH4H	MBH4Z	MBH4P5Z	MBH4P5EZ
			●			●	●									

BLACKMAX<sup>®</sup>

**BLACK & CHROME™  
VORTECH™ VALVE SERIES**

- Two and four valve black anodized aircraft aluminum machined body
- Vortech™ deep vacuum valves
- 3-1/8" (80 mm) class 1.0 accuracy gauges built with internal silicon dampening cup for flutter-free operation
- Nickel plated 1/4" SAE fittings; 3/8" SAE fitting (4 valve units)
- Large sight glass
- Heavy duty nickel plated metal handles
- Auxiliary center access port with Schrader valve
- Protective gauge boots
- Packaged in display tin
- Designed and manufactured in USA with US and globally sourced components



Large sight glass with Vortech™ valves



Protective gauge boots #RGX80B



American made non-permeating premium refrigerant hose(s)

BLACKMAX<sup>®</sup>

**BLACK & CHROME™  
TRIPLE-SEAL™ SERIES  
(includes VORTECH™ Valves)**

- Two valve black anodized aircraft aluminum machined body
- Vortech™ deep vacuum valves
- Triple Seal™ piston valves
- Available in 3-1/8" (80 mm) class 1.0 accuracy gauges or 2 1/2" (68 mm) class 1.6 accuracy gauges built with internal silicon dampening cup for flutter-free operation
- Nickel plated 1/4" SAE fittings; 3/8" SAE fitting (4 valve units)
- Auxiliary center access port with Schrader valve
- Protective gauge boots
- Packaged in display tin
- Designed and manufactured in USA with US and globally sourced components



Black anodized aircraft aluminum machined body



Protective gauge boots



Packaged in display tin

# PREMIUM PISTON SERIES MANIFOLDS



Manifold Body		Refrigerant(s)					Gauges					Manifold and Gauge Set										
Description	Valves	Fittings	R-12	R-22	R-134A	R-404A	R-407C	R-410A	R-502	Gauge Size	Accuracy	Scale	Pressure	Low Gauge	High Gauge	Manifold and Gauge only (No Hoses)	with (3) 3' Premium Pro-Set® Barrier Hoses	with (3) 5' Premium Pro-Set® Barrier Hoses	with (3) 3' Premium Pro-Set® Barrier Hoses with Anti-Blowback valves	with (3) 3' Premium Pro-Set® Barrier Hoses with Ball Valves		
<b>WORKINGMAN'S CHOICE SERIES</b>	2	1/4" SAE 45°	○	●	●	●	●	●		3-1/8"	Class 1.0	°F	Psi	RGH7L	RGH7H	MT2H7		MT2H7P5	MT2H7P5A	MT2H7P5E		
			●	●	●	●	●	●	●			°C	bar/Psi	RG07L	RG07H	MT207		MT207P5	MT207P5A	MT207P5E		
<b>BLACK BODY SERIES</b>	2	1/4" SAE 45°	○	●	●					2-1/2"	Class 1.6	°F/°C	Psi/kPa	RGZL	RGZH	MBZ	MBZS3	MBZS5				
			○	●				●	Psi				RGCL	RGCH	MBC	MBCS3	MBCS5					
			●	●	●	●						°F	Psi	RGDL	RGDH	MBD	MBDP3	MBDP5	MBDP5A	MBDP5E		
			●	●	●	●	●	●	Psi				RGHL	RGHH	MBH	MBHP3	MBHP5	MBHP5A	MBHP5E			
			●	●	●	●						°C	Psi/kPa	RGTL	RGTH	MBT	MBTP3	MBTP5	MBTP5A	MBTP5E		
			●	●		●	●	●	Psi/kPa				RGOL	RGOH	MBO	MBOP3	MBOP5	MBOP5A	MBOP5E			
<b>PINK BODY SERIES</b>	2	1/2"-20 UNF						●	2-1/2"	Class 1.6	°F/°C	Psi/kPa	RGBL	RGBH	MCB	MCBJ3	MCBJ5	MCBJ5A	MCBJ5E			
		1/4" SAE 45°					●	°F/°C				Psi/kPa	RGBL	RGBH	MEB	MEBP3	MEBP5	MEBP5A	MEBP5E			
<b>DEEP VACUUM SERIES</b>	2	1/4" SAE 45°	●	●	●	●	●		3-1/8"	Class 1.6	°F	Psi	RGH2LB	RGH2HB	MV3H2		MV3H2P5	MV3H2P5A	MV3H2P5E			
			●	●	●	●	●	●					RGH3L*	RGH3H*	MV3H3*		MV3H3P5*	MV3H3P5A*	MV3H3P5E*			
			●			●	●	●			°C	Psi/bar	RG02LB	RG02HB	MV302		MV302P5	MV302P5A	MV302P5E			
	4	1/4" SAE 45°	●	●	●	●	●		3-1/8"	Class 1.6	°F/°C	Psi/kPa	RGB3L*	RGB3H*	MV3B3*		MV3B3P5*	MV3B3P5A*	MV3B3P5E*			
			●	●	●	●	●	●					°F	Psi	RGH2LB	RGH2HB	MV13H2		MV13H2P5	MV13H2P5A	MV13H2P5E	
			●	●	●	●	●	●			°C	Psi/bar	RG02LB	RG02HB	MV1302		MV1302P5	MV1302P5A	MV1302P5E			
<b>BALL VALVE SERIES</b>	2	1/4" SAE 45°	●	●	●	●	●		2-1/2"	Class 1.6	°F	Psi	RGHL	RGHH	MGH		MGHP5	MGHP5A	MGHP5E			
			●		●	●	●	°C					bar/Psi	RGOL	RGOH	MGO		MGOP5	MGOP5A	MGOP5E		

\* oil-filled gauges



**Pro-Set**  
**PREMIUM PISTON SERIES**  
**WORKINGMAN'S CHOICE**

- 3-1/8" (80 mm) class 1.0 accuracy gauges
- Two valve anodized aluminum black body
- Triple Seal™ piston valves
- 1/4" SAE 45° fittings
- Sure grip rubber over metal valve handles
- Protective gauge boots
- Extra access port in center with Schrader valve and hanging hook



**MT2H7P5**  
● ● ● ●



**MT207P5**  
● ● ●



**Pro-Set**  
**PREMIUM PISTON SERIES**  
**BLACK BODY**

- 2 1/2" (68 mm) class 1.6 accuracy gauges
- Two valve anodized aluminum black body
- Triple Seal™ piston valves
- 1/4" SAE 45° fittings
- Sure grip rubber over metal valve handles
- Protective gauge boots
- Extra access port in center with Schrader valve and hanging hook



**MBTP5E**  
● ● ●



**MBHP5E**  
● ● ●



**Pro-Set**  
**PREMIUM PISTON SERIES**  
**PINK BODY**

- 2 1/2" (68 mm) class 1.6 accuracy gauges
- Two valve anodized aluminum pink body
- Triple Seal™ piston valves
- 1/4" SAE 45° fittings
- Sure grip rubber over metal valve handles
- Protective gauge boots
- Extra access port in center with Schrader valve and hanging hook



**MCBJ5E**  
●



**MEHP5A**  
● ● ●



**Pro-Set**  
**VORTECH™**  
**DEEP VACUUM SERIES**

- 3-1/8" (80 mm) class 1.0 accuracy gauges
- Two and four valve anodized aluminum pink block body
- Vortech™ deep vacuum valves
- 1/4" SAE 45° fittings
- Extra large sight glass
- Protective gauge boots
- Extra access port in center with Schrader valve and hanging hook




**MV3H3P5A**  
● ● ● ● ● ● ● ●  
\*oil-filled gauges



**MV13H2P5E**  
● ● ●

**Pro-Set**  
**BALL VALVE BODY SERIES**

- 2 1/2" (68 mm) Class 1.6 accuracy gauges
- Two valve anodized aluminum block body
- 1/4" SAE 45° fittings
- Full-flow ball valve design
- Hanging hook

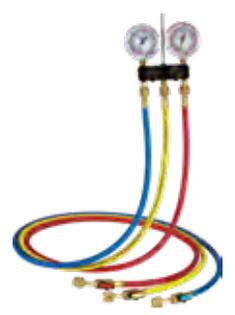

**MGHP5E**  
● ● ●



**MGOP5E**  
● ● ●

# BRASS BODY SERIES MANIFOLDS

Manifold Body			Refrigerant(s)					Gauges				Manifold and Gauge Set	
Description	Valves	Fittings	R-22	R-134A	R-404A	R-410A	R-507A	Gauge Size	Accuracy	Scale	Pressure	with (3) 3' Prem-Flex Hoses	with (3) 5' Prem-Flex Hoses
Tech-Set Brass Body Series	2	1/4" SAE 45°						3-1/8"	Class 1.6	°C	bar/Psi	-	<b>M61PF5</b>
										°F	Psi/bar	-	<b>M62PF5</b>
								2-5/8"		°C	bar/Psi	<b>M63G3</b>	-
										°F	Psi/bar	<b>M64G3</b>	-



## Tech-Set™ BRASS BODY SERIES

- 2 valve forged brass body
- 1/4" SAE 45° fittings
- TripleSeal™ piston valves
- Quality forged brass body
- Full sized porting for maximum flow
- No flutter gauges with rugged molded housings
- Large easy-to-grip knobs
- Integrated hose storage fittings
- Hanging hook
- Trilingual clamshell packaging



## MANIFOLD ACCESSORIES AND REPLACEMENT PARTS

A complete line of repair kits, parts and accessories to keep your manifold in brand-new condition. If you are looking for something or are unsure of the part you need, give us a call and let our specialists assist you.



### MXC2

Rugged canvas carrying case for manifolds



### MXC

Plastic carrying case for manifolds



### MVXK

Replacement valve handle w/ plugs for Vortech™ manifolds



### MXK

Replacement valve handle w/ labels for diaphragm manifolds



### MXPK

Replacement valve handle w/ labels for BlackMax® manifolds



### MXMH

Hanging hook for all manifolds



### M2XRK

Diaphragm valve repair kit: services 2 valves



### MXPV

Complete BlackMax® piston valve assembly



### M2XHA

2-way hose anchor bracket for Vortech™ & diaphragm



### MXPVO

BlackMax® piston valve seals repair kit: services 2 valves

## Let us help you choose the right HOSE FOR THE JOB:

	PRO-SET® PREMIUM UL/SAE BARRIER REFRIGERANT SERVICE HOSES	PRO-SET® STANDARD REFRIGERANT SERVICE HOSES
Compatible with CFC, HCFC, HFC refrigerants and blends	✓	✓
Leak-proof 8-sided crimps	✓	✓
Working pressure (Psi)	800	750
Burst pressure (Psi)	4,000	3,000
Blow off grooves preventing spray back	✓	✓
Adjustable valve core depressor	✓	✓
Extra deep knurling on nuts for easy grip	✓	✓
Nylon permeation barrier (Meets SAE J2196)	✓	✗



		1/4" Hoses for all refrigerants		1/4" Hoses w/45° ball valve on end		1/4" Hoses w/Microseal™ anti-blowback valve		1/4" In-line ball valve hoses		R-410A Hose w/special 1/2"-20 UNF fittings		w/45° ball valve fitting	
		PREMIUM	STANDARD	PREMIUM	STANDARD	PREMIUM	STANDARD	PREMIUM	STANDARD	PREMIUM			
3' (90 cm)	Yellow	HP3Y	HS3Y*	HP3YE	HS3YE*	HP3YA*	HS3YA*	HP3YL*	HS3YL*	HJ3Y*	HJ3YE*		
	Blue	HP3B	HS3B*	HP3BE	HS3BE*	HP3BA	HS3BA	HP3BL	HS3BL*	HJ3B*	HJ3BE*		
	Red	HP3R*	HS3R	HP3RE*	HS3RE*	HP3RA	HS3RA*	HP3RL*	HS3RL*	HJ3R*	HJ3RE*		
	3-Pack	HP3*	HS3	HP3E*	HS3E	HP3A*	HS3A	HP3L*	HS3L*	HJ3*	HJ3E*		
4' (120 cm)	Yellow		HS4Y*										
	Blue		HS4B*										
	Red		HS4R*										
	3-Pack		HS4*										
5' (150 cm)	Yellow	HP5Y*	HSSY*	HP5YE	HSSYE	HP5YA	HSSYA	HP5YL	HSSYL*	HJ5Y*	HJ5YE*		
	Blue	HP5B	HSSB*	HP5BE	HSSBE*	HP5BA	HSSBA	HP5BL	HSSBL*	HJ5B*	HJ5BE*		
	Red	HP5R	HSSR	HP5RE*	HSSRE	HP5RA*	HSSRA	HP5RL	HSSRL*	HJ5R*	HJ5RE*		
	3-Pack	HP5*	HSS*	HP5E	HSS*	HP5A*	HSSA	HP5L*	HSSL*	HJ5*	HJ5E*		
6' (180 cm)	Yellow	HP6Y*	HS6Y*	HP6YE	HS6YE*	HP6YA*	HS6YA*	HP6YL*	HS6YL*				
	Blue	HP6B	HS6B*	HP6BE	HS6BE	HP6BA	HS6BA	HP6BL	HS6BL*				
	Red	HP6R	HS6R	HP6RE*	HS6RE*	HP6RA*	HS6RA*	HP6RL*	HS6RL*				
	3-Pack	HP6*	HS6	HP6E	HS6*	HP6A*	HS6A	HP6L*	HS6L*				
8' (240 cm)	Yellow		HS8Y*		HS8YE*		HS8YA*		HS8YL*				
	Blue		HS8B*		HS8BE*		HS8BA*		HS8BL*				
	Red		HS8R*		HS8RE*		HS8RA*		HS8RL*				
	3-Pack		HS8*		HS8*		HS8A*		HS8L*				
10' (300 cm)	Yellow		HS10Y*										
	Blue		HS10B*										
	Red		HS10R*										
	3-Pack		HS10*										

\*Non-stock item (made to order). Call Customer Service for price and lead time.

# PREMIUM HOSES



**HP5BKEZ3**

5' premium barrier ball valve chrome charging hoses (black)



**HP5BKZ3**

5' premium Black & Chrome™ charging hose



**HV5Z**

5' premium Black & Chrome™ 3/8" charging hose



**PRO-SET™ PREMIUM 6" TO 12" BALL VALVE HOSE EXTENSIONS**

- Nylon permeation barrier (Meets SAE J2196)
- Leak-proof 8-sided crimp
- 800 Psi working pressure
- 4000 Psi burst pressure
- Extra deep knurling for easy grip
- Adjustable valve core depressor
- Blow off grooves (prevents spray back)
- R-410A compatible, as well as CFC, HCFC and HFC refrigerants and blends



	1/4" SAE		1/2" - 20 UNF
	6" (15,2 cm)	12" (30,5 cm)	6" (15,2 cm)
Yellow	HTYE	HT1YE	HT410YEJ*
Blue	HTBE	HT1BE	HT410BEJ*
Red	HTRE	HT1RE	HT410REJ*
3-Pack	HTE	HT1E	HT410EJ



**PRO-SET™ PREMIUM PRESSURE CONTROL HOSES**

Constructed with a thermoplastic polymer inner tube and cover to eliminate the vibration failures of copper capillary tube installations. The higher temperature ratings of the thermoplastic (to 266° F) eliminates failures caused by maximum load conditions on rubber type pressure control hoses.



	2' (60 cm)	3' (90 cm)	4' (120 cm)
90° x 90°	HHC2*	HHC3*	HHC4*
Straight x 90°	HHC2S	HHC3S	HHC4S*
Straight x Straight	HHC2SS*	HHC3SS*	HHC4SS*
Fitting	1/4" SAE Hex Style. Straight & 90°, With Copper Gaskets		

\*Non-stock item (made to order). Call Customer Service for price and lead time.



**PRO-SET™ PREMIUM 3/8" VACUUM/CHARGING HOSES (HEAVY DUTY)**

- 5/16" I.D. heavy-duty hose
- 460 Psi working pressure; 2300 Psi burst
- Nylon permeation resistant barrier
- 3/8" SAE Leak Proof 8 Sided Crimp
- Deep Knurl Brass Fittings



	3' (90 cm)	5' (150 cm)	6' (180 cm)	8' (240 cm)
Without Ball Valve	HV3*	HV5	HV6*	HV8*
With In-Line Ball Valve	na	HV5E	na	na



**HXG**

(10) Hose 1/4" SAE Neoprene Gaskets



**HXGD**

(10) Hose 1/4" SAE Neoprene Gasket & (10) Core Depressor



**HXGD2**

(6) 1/2" ACME, 1/2" - 20 UNF Gaskets & (6) Core Depressors




**HX38G**

(10) Hose Gaskets, 3/8" SAE Neoprene



**HXG2**

(10) 1/2" ACME, 1/2" - 20 UNF Replacement Hose Gaskets



**HXGA**

(6) Hose Gaskets, 1/4" SAE Microseal Antiblowback



**HXGA410**

(10) Replacement Gaskets for 1/2" - 20 UNF ABB Fittings



**HXTG**

(10) Hose Gaskets, 1/4" SAE Teflon®



**HXTG2**

(10) Hose Gaskets, 1/2" - 20 UNF & 1/2" ACME Teflon®

# CHARGING BALL VALVES AND VALVE ADAPTERS

## PRO-SET® COMPACT BALL VALVES

Pro-Set® premium ball valves can be added to any existing hose to eliminate refrigerant loss and comply with EPA regulations.

- Easy 1/4 turn open/close with rugged plastic composite color-coded handles
- Oversized chrome ball for smooth operation and non-restrictive flow
- Individual valves include all three color-coded handle inserts

FPT: female(internal) National Pipe Taper Threads  
MPT: male(external) National Pipe Taper Threads

	Item	Qty/Pk	Female	Male	Other
	BV	1	1/4" SAE	1/4" SAE	Straight
	BV3	3	1/4" SAE	1/4" SAE	Straight
	BV38	1	3/8" SAE	3/8" SAE	Straight
	BV410	1	5/16" (1/2" - 20 UNF)	5/16" (1/2" - 20 UNF)	45°
	BV410A	1	5/16" (1/2" - 20 UNF)	1/4" SAE	Straight
	BV45	1	1/4" SAE 45°	1/4" SAE	45°
	BV453	3	1/4" SAE 45°	1/4" SAE	45°
	BV90	1	1/4" SAE 90°	1/4" SAE	90°
	BV903	3	1/4" SAE 90°	1/4" SAE	90°
	BVAD38	1	3/8" SAE	1/4" SAE	Straight
	BVM	1	1/4" SAE	1/4" SAE	Straight
	BVM3	3	1/4" SAE	1/4" SAE	Straight
	BVXH	1 Ea	Replacement Ball Valve Handle w/1 ea (Yellow, Blue, Red) inserts		

## PRO-SET® MICROSEAL™ ANTI-BLOW BACK VALVES

	AB	1	1/4" SAE	1/4" SAE	Straight
	AB3	3	1/4" SAE	1/4" SAE	Straight
	AB410A	1	5/16" SAE (1/2" - 20 UNF)	1/4" SAE	Straight
	AB41090A	1	5/16" SAE (1/2" - 20 UNF) 90°	1/4" SAE	90°
	AB90	1	1/4" SAE 90°	1/4" SAE	90°
	ABG18	1	1/4" SAE 45°	1/8" FPT	1/8" FNPT is not an AB
	AB45	1	1/4" SAE 45°	1/4" SAE	Straight

## BLACKMAX®

### PREMIUM TUBE CUTTERS

WITH PATENTED **SetN-Cut™**

- All BLACKMAX tube cutters feature our patented Set-N-Cut™ spring-loaded center groove rollers and cutting wheels for a fast and smooth cut everytime, even on slightly deformed tube
- Quick release pin for fast replacement of cutting wheels

#### **BTC100** BLACKMAX® Ultra Mini Tube Cutter

- Great for confined spaces
- Cutting Range: 1/8" - 5/8" (4-16 mm) O.D.
- Chromed, hardened cutting wheel
- For soft/hard copper, aluminum tube Soft/Hard cutting settings
- Durable cast aluminum
- Size (HWD) 1.9" x 1.5" x 0.6" (50 x 37 x 15 mm)
- Clamshell package with color insert card



#### **BTC200** BLACKMAX® Mini Tube Cutter

- Great for confined spaces
- Cutting Range: 1/8" - 7/8" (3-22 mm) O.D.
- Chromed, hardened cutting wheel
- Provides a smooth cut, even for slightly deformed tube
- Soft/Hard cutting settings
- Durable aluminum and rubber knob
- Size (HWD): 2.75" x 1.6" x 0.8" (72 x 40 23 mm)
- Clamshell package with color insert card



#### **BTC200R** BLACKMAX® Mini Ratchet Tube Cutter

- Great for confined spaces
- Cutting Range: 1/8" - 7/8" (3-22 mm) O.D.
- Excellent for small tube, confined spaces
- Use with or without ratchet handle
- Chromed, hardened cutting wheel
- Soft/Hard cutting settings
- Durable aluminum and rubber knob
- Clamshell package with color insert card



#### **BTC300** BLACKMAX® Tube Cutter

- Cutting Range: 3/16" - 1-1/4" (5 - 32 mm) O.D.
- Two quick-change, chromed, hardened cutting wheels
- Enclosed feed screw eliminates clogging, jamming
- Durable aluminum and rubber knob
- Clamshell package with color insert card



**BTC400 BLACKMAX® Heavy Duty Tube Cutter**

- Cutting Range: 1/4" -1-1/4" (6 - 32 mm) O.D.
- Heavy duty performance from lightweight aluminum forged body for brass, copper, aluminum, stainless tube and electrical conduit
- Titanium finish cutting wheel included
- Durable aluminum/rubber knob
- Clamshell package with color insert card



**BTC500 BLACKMAX® Large Tube Cutter**

- Cutting Range: 3/8" -2-5/8" (10 - 67 mm) O.D.
- Two hardened cutting wheels with quick-change pin design
- Enclosed feed screw eliminates clogging and jamming
- Four grooved rollers for precise tube rotation
- Rapid adjustment with quick-slide feed mechanism
- Durable aluminum/rubber knob
- Clamshell package with color insert card



**BTLD3 BLACKMAX® Deburring Tool**

- Solid aluminum handle. For soft copper and aluminum tube. Includes (2) spare blades in handle
- Clamshell package with color insert card



**REPLACEMENT BLADE FOR BTLD3**

TLDB2X | Replacement Blade

**REPLACEMENT PARTS FOR TUBE CUTTERS**

		BTC100	BTC200	BTC200R	BTC300	BTC400	BTC500
BTCXCT2*	Cutting Wheel (Titanium Coated)					Standard	Optional
BTCXC1	Cutting Wheel (Zinc Plated)		Standard	Standard	Standard		
BTCXC2	Cutting Wheel (Chrome Plated)					Optional	Standard
BTCXC3	Cutting Wheel (Nickel Plated)	Standard					
BTCXCT1	Cutting Wheel (Titanium Coated)		Optional	Optional	Optional		
BTCXP1	Quick Release Pin		Standard	Standard	Standard		
BTCXP2	Quick Release Pin					Standard	
BTCXP3	Quick Release Pin						Standard
BTCXP4	Quick Release Pin	Standard					
BTCXR	Plastic Ratchet (For BTC200R)		Optional	Standard			
BTCXB**	Bearing				**		

\*Only for use with BTCXB Cutting Wheel Bearing and BTC400 (optional for BTC500)

\*\*Only for use with BTCXCT2 cutting wheel.



**BLACKMAX® PREMIUM TUBE BENDER KIT**

- Available in Imperial or metric kit
- For soft copper and aluminum tube
- Solid aluminum, color-coded mandrels
- Forward or reverse bends from 0° to 90°
- Reverse bend mechanism for tight quarters
- Durable molded carrying case
- Packaging: Color box



FORWARD BEND CONFIGURATION



REVERSE BEND CONFIGURATION

**BTB300 BLACKMAX® Imperial Tube Bender Kit**

Mandrels	Item	Tube O.D.	Mandrel Color	Inside Radius Of Bent Tube
	BTBX14	1/4" O.D.	Chrome	1-1/8"
	BTBX516	5/16" O.D.	Copper	1-1/4"
	BTBX38	3/8" O.D.	Red	1-1/4"
	BTBX12	1/2" O.D.	Yellow-Orange	1-3/8"
	BTBX58	5/8" O.D.	Blue	1-5/8"
	BTBX34	3/4" O.D.	Green	1-7/8"
	BTBX78	7/8" O.D.	Red-Violet	2"
	BTBXH	Ratchet Tool, Imperial		
	BTBXA1	1/4" - 3/8" Shoe Arm		
	BTBXA2	1/2" - 7/8" Shoe Arm		
	BTBXR1	Reverse Bender Mandrel Arm		
	BTBXR2	Reverse Bender Shoe Arm		

"O.D." = Outside Diameter

**BTB300M BLACKMAX® Metric Tube Bender Kit**

Mandrels	Item	Tube O.D.	Mandrel Color	Inside Radius Of Bent Tube
	BTBX6M	6 mm O.D.	Chrome	29mm
	BTBX8M	8 mm O.D.	Copper	32mm
	BTBX10M	10 mm O.D.	Red	32mm
	BTBX12M	12 mm O.D.	Yellow-Orange	35mm
	BTBX15M	15 mm O.D.	Yellow-Green	41mm
	BTBX16M	16 mm O.D. (Optional for BTB300M)	Blue	41mm
	BTBX18M	18 mm O.D.	Titanium	48mm
	BTBX22M	22 mm O.D.	Red-Violet	51mm
	BTBXHM	Ratchet Tool, Metric		
	BTBXA1	6-10 mm Shoe Arm		
	BTBXA2	12 - 22 mm Shoe Arm		
	BTBXR1	Reverse Bender Mandrel Arm		
	BTBXR2	Reverse Bender Shoe Arm		

"O.D." = Outside Diameter

**BLACKMAX® Lever Tube Benders**

- Patented 2-position handle
- Available in Imperial or metric
- For soft copper, aluminum tube
- Double hinged bending arms for tight quarters
- Two pull points for smooth, easy bends
- Bends from 0° to 180°
- Packaging: Color box

**BTB06**



**BTB10MM**



**BTB08**



**BTB12MM**



**BTB10**



**BTB15MM**



**BTB12**



**BTB16MM**

**BLACKMAX® Imperial Lever Tube Benders**

Item	Tube O.D.	Mandrel Color	Inside Radius Of Bent Tube	Bender Overall Length
BTB06	3/8"	Violet	15/16"	15"
BTB08	1/2"	Gold	1-1/2"	20"
BTB10	5/8"	Blue	2-1/4"	29"
BTB12	3/4"	Green	3"	32"
BTB14	7/8"	Purple	3-1/4"	32"

**BLACKMAX® Metric Lever Tube Benders**

Item	Tube O.D.	Mandrel Color	Inside Radius Of Bent Tube	Bender Overall Length
BTB10MM	10mm	Violet	24mm	31cm
BTB12MM	12mm	MM	38mm	51cm
BTB15MM	15mm	Blue	57mm	74cm
BTB16MM	16mm	Green	57mm	81cm
BTB18MM	18mm	Purple	76mm	81cm

**BTB14**



**BTB18MM**



**BTLH5E Hydraulic BLACKMAX® Tube Expander**

- Hydraulic power- the easiest way to swage tubing!
- Includes hydraulic tool, plus 5 quick change, color coded expander heads and tube reamer
- Five heads for expanding 3/8", 1/2", 5/8", 3/4", 7/8" O.D. soft copper or aluminum tube
- Expander heads and replaceable blades are interchangeable with BLACKMAX BTLE9/BTLE9M models
- Cast aluminum body with durable, rubber grip handle.
- Extra storage for additional expander heads

**BTLE9 BLACKMAX® PREMIUM TUBE EXPANDER KIT**

- Swaged ends means less couplings & less refrigerant leaks
- Imperial or metric
- For soft copper and aluminum tube
- Nine quick-change tube expanders (Imperial or Metric-See chart below)
- Durable, color-coded, aluminum heads
- Compact, professional, patented design
- Strong carrying case
- Packaging: Color box

**REPLACEMENT PARTS FOR BTLH5E**

BTLEXH | Tube Expander (Replacement Tool)



**REPLACEMENT PARTS:**

**For BTLE9/BTLH5E Imperial Tube Expander Kit**

Size	Expander Heads		Blades (6 Pk)
	Color	Item	Item
1/4"	Chrome	BTLEX14	BTLEX14B
5/16"	Copper	BTLEX516	BTLEX516B
3/8"	Red	BTLEX38	BTLEX38B
1/2"	Yellow-Orange	BTLEX12	BTLEX12B
5/8"	Blue	BTLEX58	BTLEX58B
3/4"	Green	BTLEX34	BTLEX34B
7/8"	Red-Violet	BTLEX78	BTLEX78B
1"	Black	BTLEX1	BTLEX1B
1-1/8"	Pink	BTLEX118	BTLEX118B

**For BTLE9M Metric Tube Expander Kit**

Size	Expander Heads		Blades (6 Pk)
	Color	Item	Item
6 mm	Chrome	BTLEX6M	BTLEX6MB
8 mm	Copper	BTLEX8M	BTLEX8MB
10 mm	Red	BTLEX10M	BTLEX10MB
12 mm	Yellow-Orange	BTLEX12M	BTLEX12MB
15 mm	Yellow-Green	BTLEX15M	BTLEX15MB
18 mm	Titanium	BTLEX18M	BTLEX18MB
22 mm	Red-Violet	BTLEX22M	BTLEX22MB
28 mm	Red-Orange	BTLEX28M	BTLEX28MB
32 mm	Black - Chrome	BTLEX32M	Not Available

**BFT850D BLACKMAX® Drill Powered Flaring Tool**

- Dramatically reduces the amount of time to create a precise flare
- Seven quick change positions for flaring soft copper and aluminum tube
- Aluminum body- 50% lighter than steel designs
- Slide gauge sets tube at exact position
- Eccentric cone forms precise 45° flared ends
- For 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" O.D. tube
- Built-in clutch prevents over-compression
- Compact, professional, patented design
- Packaging: Color box



Quick Change



Slide Gauge



Eccentric Forming Cone



Molded Storage Case



**BFT850 BLACKMAX® Flaring Tool**

- Aluminum body is 50% lighter than steel designs
- Internal clutch indicates when formed flare is complete
- Seven quick-change positions for flaring soft copper and aluminum tube
- Compact, professional, patented design
- Eccentric cone forms precise 45° flared ends
- Strong carrying case
- Imperial tool for 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" O.D.
- Built in slide gauge for tube height adjustment
- Packaging: Color box



**BFT850K BLACKMAX® Flaring Tool KIT**

- BFT850 Flaring Tool
- FTXSG Reversible R410A Flare Size Gauge
- BTLDB3 Deburring Tool
- BTC300 Premium Tube Cutter
- Packaging: Color box

	BFT850D	BFT850K	BFT850
	Cordless Drill Powered Flaring Tool	Manually Operated Flaring Tool Kit	Manually Operated Flaring Tool
Tube Sizes (Outside Diameter)	3/16, 1/4, 5/16, 3/8, 1/2, 5/8, 3/4		
Aluminum body / flaring bar	Yes		
Internal Clutch	Yes (Releases when flare is complete)		
1/4" Driver Bit Included?	Yes		No
Quick Change Removable Handles	Yes (Top and side handles)		No
Built In Slide Gauge	Yes (for fast tube alignment)		
Eccentric Hardened Steel Cone	Yes		
Durable Carrying Case	Yes		

# MERCHANDISING BLACKMAX TOOLS IN YOUR SHOWROOM



Gondola end caps are an excellent way to display BLACKMAX products in your showroom. A standard 60" x 36" x 16" (1.5m x 0.91m x 0.4m) end cap holds a large quantity of BLACKMAX products (see chart below) and makes them visible and accessible to your customers.

Thirty percent of all store sales come from end-of-aisle displays, so contact your CPS sales representative to purchase BLACKMAX products for your showroom!

## BLACKMAX PRODUCTS FOR A TYPICAL END CAP SHOWN

Product	Qty
<b>BTC-100</b> Ultra Mini Tube Cutter	8
<b>BTC-200</b> Mini Tube Cutter	6
<b>BTC-200R</b> Mini Ratchet Tube Cutter	3
<b>BTC-300</b> Tube Cutter	4
<b>BTC-400</b> Heavy Duty Tube Cutter	3
<b>BTC-500</b> Large Tube Cutter	3
<b>BTLDB3</b> Debur Tool	8
<b>BTB300</b> Tube Bender Set	4
<b>BTLE9</b> Tube Expander Set	4
<b>BTLE5E</b> Hydraulic Tube Expander	4
<b>BFT850</b> Flaring Tool	3
<b>BFT850D</b> Drill Powered Flaring Tool	3
<b>BTLDTW</b> Digital Torque Wrench	2
<b>BTLGP4</b> Gear & Pulley Remover 3" to 4"	2
<b>BTLGP7</b> Gear & Pulley Remover 3" to 7"	2
<b>TR700</b> Blackmax 2 Cylinder Recovery Machine	2
<b>MV4H4P5EZ</b> Spider Manifold	2



**Pro-Set**

**PROFESSIONAL TITANIUM TUBE CUTTERS**

- All cutter wheels are precision machined from high grade chromium steel and plated with titanium nitride to extend life—up to 5 times longer!
- Precision machined rollers feature cut-off groove to reduce tube loss in damaged flare removal
- Durable metal handle with industrial grade rubber boot provides comfortable grip
- Enclosed hardened steel, thrust bearing feed mechanism for smooth cutting action and trouble free operation
- Packaging: Clamshell



**TCT127 PRO-SET®**

**Mini Titanium Tube Cutter**

- Cutting Range: 1/8" to 5/8", (3 to 16 mm)



**TCT174 PRO-SET®**

**Mini Titanium Tube Cutter**

- Cutting Range: 1/8" to 1-1/8", (3 to 30 mm)



**TCT206 Heavy Duty Titanium**

**Sliding Tube Cutter**

- Cutting Range: 1/4" to 2-5/8" (6 to 68 mm)



**TCT274**

**Titanium Tube Cutter**

- Cutting Range: 1/8" to 1-3/8" (3 to 35 mm)



**TCT312**

**Heavy Duty Titanium Tube Cutter**

- Cutting Range: 1/8" to 1-3/4", (3 to 45 mm)



**TCPVC**

**Heavy Duty Titanium Pvc Tube Cutter**

- Cutting Range: 1/4" to 2-5/8" (6 to 68 mm)



**TC174**

**PRO-SET® Mini Tube Cutter**

- Cutting Range: 3/8" - 1-1/8" (10 - 29 mm)



**TLRM**

**Reaming And Deburring Tool**

- Rugged die cast metal for long life
- Removes burrs from inside and outside edges of tube
- Ergonomic shape



**FTXSG R410A**

**Flare Size Gauge**

- 1/4", 6.4 mm
- 3/8", 9.5 mm
- 1/2", 12.7 mm
- 5/8", 15.9 mm
- 3/4", 19.1 mm



**TLDB2**

**Pocket Deburring Tool**

- Remove burrs and surface defects from inner/outer straight and hole edges.

**REPLACEMENT PARTS**

TLDB2X Replacement Blade

**REPLACEMENT PARTS**

	TCT127	TCT174	TCT206	TCT274	TCT312
CUTTING WHEELS (& Screws)					
TCXT127C	Standard				
TCXT174C		Standard			
TCXT206C			Standard		
TCX4CTS				Standard	Standard
TCXT274C				Standard	
TCXT312C					Standard

	TCT127	TCT174	TCT206	TCT274	TCT312
REAMER BLADE					
TCXT206R			Standard		
TCXT274RB				Standard	



**TB250**

**Universal Ratchet Tube Bender Set**

- Universal kit bends tube from 1/4" to 7/8" and 6mm to 22mm
- Metal ratcheting system built for long life
- Seven durable molded plastic mandrels
- Includes Pro-Set TC274 Tube Cutter
- Includes TLRM Reaming and Deburring Tool

**REPLACEMENT PARTS**

TBXM6	Molded Plastic Mandrel 1/4" (6 mm)
TBXM8	Molded Plastic Mandrel 5/16" (8 mm)
TBXM10	Molded Plastic Mandrel 3/8" (10 mm)
TBXM14	Molded Plastic Mandrel 1/2" (14 mm)
TBXM16	Molded Plastic Mandrel 5/8" (16 mm)
TBXM19	Molded Plastic Mandrel 3/4" (19 mm)
TBXM22	Molded Plastic Mandrel 7/8" (22 mm)
TBXR	Ratchet Mechanism
TBXB1	Small bending bar replacement
TBXB2	Large bending bar replacement
TC274	Pro-Set Tube Cutter
TLR M	Reaming and Deburring Tool

**PRO-SET® LEVER TUBE BENDERS**

- Constructed of high strength steel for durability and long life
- Create smooth, tight radius bends up to 180° with minimal effort
- Bends without scoring or flattening of tubing
- Calibrated to show angle of bend
- Wide hook grips tubing securely



**TB04** 1/4" O.D.



**TB05** 5/16" O.D.



**TB06** 3/8" O.D.



**TB08** 1/2" O.D.



**TB10** 5/8" O.D.

**TB10XH** Replacement Hook with Screw



**TB12** 3/4" O.D.

**TB12XH** Replacement Hook with Screw



**TB14** 7/8" O.D.



**TB6MM** 6 mm O.D.



**TB10MM** 10 mm O.D.



**TB12MM** 12 mm O.D.



**TB15MM** 15 mm O.D.



**TB16MM** 16 mm O.D.



**FT800FN**

**PRO-SET® R-410A Imperial Concentric Flaring Tool & Ratchet**

- Imperial clutch driven flaring tool with ratchet and case for 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4" O.D. tubing
- Unique clutch driven feed screw and eccentrically mounted cone produces uniform, clean flare walls without galling
- Engineered specifically to create stronger flare joints for higher pressure R-410A systems
- Innovative 3/8" square drive incorporated directly in yoke handle for use of ratchet
- Rugged polyethylene storage case included

**INCLUDES**

FTX800B410	R-410A flaring bar
FTX800R	Ratchet
FTX800Y	Yoke assembly



**FT806M**

**PRO-SET® Metric Flaring Tool & Ratchet**

- Metric clutch driven flaring tool with ratchet and case for 6, 8, 10, 12, 15, 16 & 18mm O.D. tubing
- Unique clutch driven feed screw and faceted cone produce uniform, clean flare walls without thin spots or galling
- Innovative 3/8" square drive incorporated directly in yoke handle for use of ratchet
- Rugged polyethylene storage case included.

**INCLUDES**

FTX800BM	Metric flaring bar
FTX800R	Ratchet
FTX800Y	Yoke assembly



**FT806A**

**PRO-SET® Imperial Eccentric Flaring Tool & Ratchet**

- Standard imperial clutch driven flaring tool with ratchet and case for 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" & 3/4" O.D. tubing
- Unique clutch driven feed screw and faceted cone produce uniform, clean flare walls without thin spots or galling
- Provides an exact amount of flaring torque with break away clutch system
- Innovative 3/8" square drive incorporated directly in yoke handle for use of ratchet
- Rugged polyethylene storage case included.

**INCLUDES**

FTX800BA	Imperial flaring bar
FTX800R	Ratchet
FTX800Y	Yoke assembly



**PRO-SET® TUBE EXPANDER/SETS**

- Create professional grade one seam pipe unions in the field.
- Multi-faceted interchangeable heads ensure equal linear expansion of tubing and uniformed wall thickness.
- Extended handle length provides added leverage for ease of operation.
- Re-round deformed tubing and fabricate couplings.
- Components are heat treated for durability.
- Ideal for copper, aluminum and soft steel tubing.
- Includes storage case for long-term protection.

**TLE6 Imperial TUBE EXPANDER SET**

**INCLUDES**

TLE601	Expander Tool
TLRM	Reaming and Deburring Tool
TLH06	3/8" Expander Head
TLH08	1/2" Expander Head
TLH10	5/8" Expander Head
TLH12	3/4" Expander Head
TLH14	7/8" Expander Head
TLH18	1-1/8" Expander Head

**OPTIONAL**

TLH16	1" Expander Head
TLH22	1-3/8" Expander Head
TLH26	1-5/8" Expander Head

**TLE6M METRIC TUBE EXPANDER SET**

**INCLUDES**

TLE601	Expander Tool
TLRM	Reaming and Deburring Tool
TLHM10	10 mm Expander Head
TLHM12	12 mm Expander Head
TLHM15	15 mm Expander Head
TLHM18	18 mm Expander Head
TLHM22	22 mm Expander Head
TLHM28	28 mm Expander Head

**OPTIONAL**

TLHM16	16 mm Expander Head
TLHM20	20 mm Expander Head
TLHM35	35 mm Expander Head
TLHM42	42 mm Expander Head



**TC127 Mini Tube Cutter**

- Cutting Range: 1/8" to 5/8" (3 to 16 mm)
- Ideal for cutting in limited access areas
- Ratchet mechanism speeds precision machined chromium steel cutting wheels

**✂ REPLACEMENT PARTS**

TCX7C	(10) Cutting wheels
TCX7S	(10) Cutting Wheel Screws
TCX7CTS	(1) Titanium Cutting Wheel & (1) Screw
TCX7CS	(1) Cutting Wheel and (1) Screw



**TC206 Sliding tube cutter**

- Cutting Range: 3/8" to 2-5/8" (10 to 67 mm)
- cutting wheel adjustment

**TCX6CTS** (1) Titanium Cutting Wheel & (1) Screw



**Spring Type Tube Benders**

- For soft copper and aluminum tubing
- Special spring steel with zinc finish
- Hand bend tubing to any shape without collapsing walls
- End bell design for quick removal of tubing

**TBS04** 1/4" Spring Tube Bender

**TBS05** 5/16" Spring Tube Bender

**TBS06** 3/8" Spring Tube Bender

**TBS08** 1/2" Spring Tube Bender

**TBS10** 5/8" Spring Tube Bender

**TBS12** 3/4" Spring Tube Bender



**TC274 Tube Cutter**

- Cutting Range: 1/8" to 1-1/8" (3 to 29 mm)
- Hardened steel thrust bearing feed mechanisms for smooth operation
- Precision machined chromium steel cutting wheels
- Foldaway hardened steel reamers for deburring

**✂ REPLACEMENT PARTS**

TCX4R	(1) Reamer Blade
TCX4RS	(1) Reamer Blade Screw
TCX4C	(10) Cutting Wheels
TCX4CS	(1) Cutting Wheel and Screw
TCX4S	(10) Cutting Wheels and Screws



**TCSET Tube Cutter Combo Pack**

- Cutting Range: 1/8" to 1-1/8" (3 to 29 mm)
- Includes TC127 & TC274



**TC312 Heavy duty tube cutter**

- Cutting Range: 1/4" to 1-5/8" (6 to 41 mm)
- Spare cutting wheel located under retractable locking reamer

**✂ REPLACEMENT PARTS**

TCX4R	(1) Reamer Blade
TCX4RS	(1) Reamer Blade Screw
TCX4C	(10) Cutting Wheels
TCX4CS	(1) Cutting Wheel and Screw
TCX4S	(10) Cutting Wheels and Screws



**TCAP Capillary Tube Cutter**

Cleanly cuts all types of refrigerant capillary tubing without constricting, swaging or flattening.



**TB368 Universal Tube Bender**

- Triple head lever type tube bender 1/4", 5/16", 3/8" (6, 8, 10 mm)
- For soft copper, aluminum and thin wall steel tubing



**TLDB Pocket Deburring Tool With Blade Storage**

- For soft copper and aluminum tubing
- Remove burrs and surface defects from inner/outer straight and hole edges

**✂ REPLACEMENT PARTS**

TLDBX	Reamer Blade & Screw
-------	----------------------



**TCX4S**  
Cutting Wheel Replacement Screw (10 Pk). For TC274, TC312



**TCX4C**  
Cutting Wheels (10 Pk) For TC174, TC274, TC312



**TCX4R**



**FS275, FS275M 45° Flaring & Swaging Kit**

**FS275** Imperial kit for 1/8" to 3/4"  
**FS275M** Metric kit for 4 mm to 22 mm

- Rugged forged steel slip-on yoke and hardened flaring bar
- Chrome finished flaring cone forms better flares with less effort
- Positive grip flaring bar eliminates tube movement
- Easy operation with professional results

**✂ REPLACEMENT PARTS**

FSX501	FS275 Long Bar (7/16", 1/4", 1/8", 3/16", 5/16", 3/8")	
FSX502	FS275 Short Bar (3/4", 1/2", 5/8")	
FSX503	FS275 5/16" Swaging Adapter	
FSX504	FS275 3/16" Swaging Adapter	
FSX505	FS275 1/2" Swaging Adapter	
FSX506	FS275 5/8" Swaging Adapter	
FSX508	FS275 3/4" Swaging Adapter	
FSX509	FS275 Yoke Assembly	
FSX513	FS275 Compressor Cone	
Metric Swaging Adapters, 5 Pce (8,12,14,16,22 mm)		
FS275 Metric	FSX507	FS275M 8,12,14,16,22 MM SWAG. ADPTRS-5PC
	FSX511	FLARING BAR 4,6,8,12,15,16MM FOR FS275M
	FSX512	FS275M 4,18,22MM FLARING BAR METRICFS275M 4,18,22MM FLARING BAR METRIC



**FT525 45° UNIVERSAL ADJUSTABLE FLARING TOOL**

- Flares from 3/16" to 5/8" (5 to 16 mm)
- Unique faceted flaring cone automatically burnishes flare face during operation
- Produces perfect 45° flares while maintaining thickness at base of flare
- Rugged forged steel slip-on yoke
- Compact design ideal for use in tight quarters



**FT195 45° IMPERIAL FLARING TOOL**

- Flares 7 of the most common sizes of tubing from 3/16" to 5/8" (5 to 16 mm)
- Rugged forged steel slip-on yoke and hardened flaring bar
- Chrome finished flaring cone forms better flares with less effort
- Positive grip flaring bar eliminates tube movement



**FT203 45° IMPERIAL FLARING TOOL**

- Flares 4 sizes of tubing - 5/8", 3/4", 7/8" & 1-1/8"
- Rugged forged steel slip-on yoke and hardened flaring bar
- Chrome finished flaring cone forms better flares with less effort
- Positive grip flaring bar eliminates tube movement
- Easy operation with professional results



**FT500/FT500M 45° FLARING/BURNISHING TOOL**

- **FT500** Imperial tool for 3/16", 1/4", 5/16", 3/8", 1/2" & 5/8"
- **FT500M** Metric tool for (6 - 16 mm)
- Heat treated sliding dies with lever clamping action hold tubing firmly in place
- Rugged forged steel slip-on yoke with large handle for ease of use

**✂ REPLACEMENT PARTS**

FTX516	Yoke assembly
FTX517	Tube holding assembly
FTX518	Flaring cone

**✂ REPLACEMENT PARTS**

FTX500	Yoke assembly
FTX501	Flaring bar
FTX509	Compressor cone
FTX510	Wing nut

**✂ REPLACEMENT PARTS**

FTX500	Yoke assembly
FTX501	Imperial Flaring bar
FTX509	Compressor cone
FTX510	Wing nut
FTX514	FT500 Die Holder Assembly
FTX515	FT500M Die Holder Assembly



## MINI-SPLIT TOOL KITS

Kit Contents	TLB410A	TLB410SAE	TLB410KIT	TLB410KIT2	TLB410AC	TLB410ACE	TLB410M
2 Valve Manifold	Pro-Set® Piston Pink Body 1/4" SAE 45° fittings "H" Gauge #MEHP5E		Pro-Set® Premium Piston Series Manifold #MT2HP	BlackMax® Black and Chrome Series Manifold #MV4HP410A	BlackMax® Black & Chrome 1/4" SAE 45° fittings "H5" Gauge #MBH5P5Z	BlackMax® Black & Chrome 1/4" SAE 45° fittings "H5" Gauge #MBH5P5EZ	No Manifold
Hoses	Pro-Set® Premium (3) 5' red/blue/yellow ball valve hoses		BlackMax® Black & Chrome Premium Hose Set #HP5BKEZ and Vacuum Hose #HV5BK	Pro-Set® Premium (3) 5' Black & Chrome hoses	Pro-Set® Premium (3) 5' Black & Chrome ball valve hoses		No Hoses
Flaring Tool	FT800N		BFT850	BFT850	FT800N		
Flare Gauge	No			#FTXSG	No		
Torque Wrench Set	Metric #TLTWSM	SAE/Imperial #TLTWSAE	Universal Handle with SAE/Imperial & Metric Heads	#BTLDTW Digital torque wrench	Metric #TLTWSM		
Tube Cutter	No			#BTC300	No		
Deburring Tool	No			#BTLDB3	No		
Hex Wrench Set	(1) # TLSWHM (metric) and (1) # TLSWH (imperial)						
Valve Core Tool	TLVC410A			TLVC410A. TLVCS410	TLVC410A		
Brass Adapters and Brass Caps	Includes: (10) AVC410 1/2"-20 UNF SAE Brass Caps, (2) AD87 Brass Adapter Male: 1/4" SAE 55D; female: 1/2"-20 UNF SWVL w/ Valve Core Tool, and (2) AD87S Brass Adapter (Male: 1/4" SAE; female: 1/2"-20 UNF) w/Valve Core Tool						
Tool Organizer	TLBAG1			TLBAG2	TLBAG1		

# CPS® EXTRA DURABLE TOOL BAGS

Organize and protect your tools with extra strong, premium built tool bags from CPS.



### TLBAG1

#### Square Tool Organizer

10" x 10" ( 25 x 25 cm )



### TLBAG2

#### Rubber Bottom Tool Organizer

9" x 16" (23 x 41 cm)



### TLBAG3

#### Tool Belt Tool Organizer



### PTXC

#### Cloth Tool Pouch


- Double wall
- Embroidered CPS logo
- 5.5" x 10" (13 x 26 cm)
- Zipper closure + carabiner



### TLMKC18 Solenoid Magnet

The **TLMKC18** is designed to manually open solenoid valves by magnetically lifting the stem assembly and plunger. Simply slide the **TLMKC18** over the valve's enclosing tube and the industrial grade magnets incorporated inside the rugged ABS plastic housing does the rest. It is an ideal tool for trouble shooting/servicing both direct connected or pilot operated 2-way solenoid, 3-way reclaim or 4-way reversing valves.

- 0.75"/18 mm opening fits all common manufactured valves

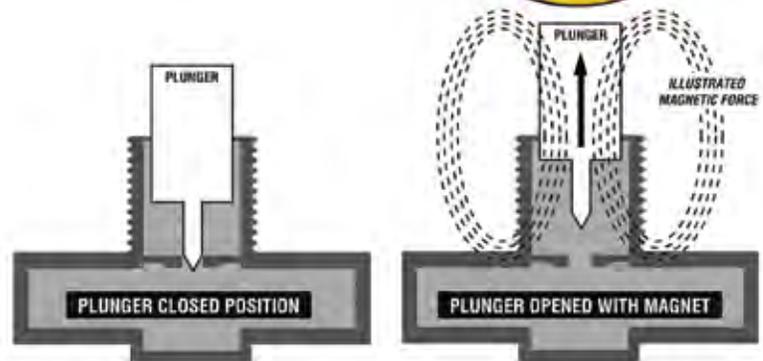

### TLMAG1 Compact Magnetizer/Demagnetizer

Use the **TLMAG1** to magnetize tools in order to keep small screws and nuts in position, especially helpful when working in confined spaces. Or demagnetize tools when working on or near electronic circuit boards. Simply insert a screwdriver or nut driver into the (+) opening, slowly draw it out and it's magnetized. Leave the magnetizer on the tool for extra strength. To demagnetize, slowly draw the tool through the smallest area of the (-) opening.

- Instantly magnetize or demagnetize steel tools & parts
- Incorporates two C5 industrial strength magnets
- Impact resistant ABS molded plastic
- No batteries or electricity required
- Compact design: 2" x 2" x 1"





**BTLDTW BLACKMAX® Digital Torque Wrench**

Ideal for HVAC mini-split installations or where OEM-specified torque settings are critical, the BlackMax digital torque wrench exceeds the capabilities of mechanical-only torque wrenches by offering a variety of user-friendly features in a lightweight, durable and ergonomic housing.

Large display numbers prevent misreading torque data, a common problem when using wrenches without digital displays. View "Peak" and "Track" torque data with audible (tone), visual (LED) and tactile (vibration) "torque alerts" to prevent over-tightening by providing advance warning when approaching or exceeding predefined torque settings. Operates on 2 AAA batteries (included).

- Ensures OEM torque setting compliance
- Ideal for HVAC mini-split installations
- **Jaw opening:** 3/16" to 1-7/16" (5 to 35mm)
- **Torque settings:** Lbf.ft, Lbf.in, N-m, Kgf.m
- Pre-set and actual torque values:- View both same time
- **LED Torque Alerts:** Green= within 50-98%, Red= within 2%
- **Memory Presets:** 5 factory programmed, 5 open to enter custom torque values
- **Track mode:** View real-time torque value during use
- **Peak mode:** Maximum torque value reached is stored temporarily
- **Auto-Off (Selectable):** Conserves battery life
- Backlighting display

**KEY FEATURES**



Color Box



Molded Storage Case

Torque Units (Selectable)	Lbf.ft	Lbf.in	N-m	Kgf.m
<b>Torque Measurement Range</b>	6-63	71-752	8-85	1-8
<b>Display Resolution</b>	0.1 Lbf.ft	1.0 Lbf.in	0.1 N-m	0.1 Kgf.m
<b>Accuracy</b>	± 2% clockwise and counter-clockwise of reading, 10% to 100% of full scale			
<b>Jaw Opening</b>	3/16" – 1-7/16" (5 - 35 mm)			
<b>Operating Voltage</b>	3V (2 x AAA batteries, supplied)			
<b>Operating Temperature</b>	32°F~104°F (0°C ~ 40°C)			
<b>Storage Temperature</b>	-4°F ~113°F (-20°C ~ 45°C)			
<b>Wrench (+ Case) Weight</b>	2.79 lb (1.27 kg)			
<b>Wrench Length</b>	15.25" (0.387 m)			
<b>Green LED Flashes</b>	Within 50% to 98% of programmed torque (in Peak or Track mode)			
<b>Intermittent Tone</b>	Within +/- 5N-m of programmed torque value			
<b>Red LED On</b>	Within 2% of programmed torque value			
<b>Faster Tone</b>	Within +/- 2 N-m of programmed torque value			
<b>Continuous Tone + Constant Green LED &amp; Handle Vibrates</b>	When >2% over programmed torque value			
<b>Display Constant On:</b>	Battery life = approx. 120 hours			
<b>Display &amp; Backlight Constant On:</b>	Battery life = approx. 96 hours			
<b>Replacement Battery Cap</b>	BTLDTWCX			


## PRO-SET TORQUE WRENCHES



### PRO-SET® MECHANICAL TORQUE WRENCHES

Professional interchangeable jaw torque wrench sets ensure compliance with OEM torque settings for high pressure systems.

- SAE (Inch) or Metric Sets: Both include 6 sizes of interchangeable ends
- Polished chrome finish
- Provides consistently accurate readings and rugged, trouble-free performance
- Includes easy instructions sheet and molded storage case

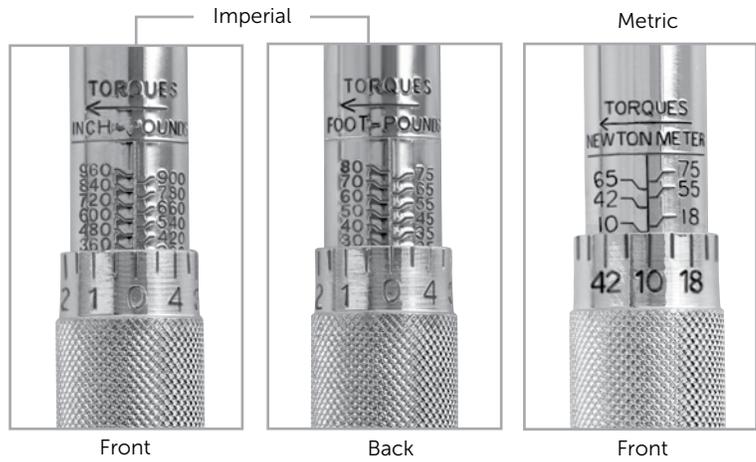

#### TLTWSAE

##### Imperial Wrench Set

- Inch wrench settings in inch-pounds (60-960) or foot-pounds (5-80)
- **Includes:** SAE multi-head torque wrench set with handle, heads and case (5/8", 11/16", 13/16", 15/16", 1-1/16", 1-5/16")



#### TLTWSM

##### Metric Wrench Set

- Metric wrench settings in newton-meters (10-75)
- **Includes:** metric multi-head torque wrench set with handle, heads and case (17, 22, 24, 26, 27, 29 mm)

### ✂️ REPLACEMENT PARTS

TLXTWSAE	Complete Set of (6) SAE Wrench Heads
TLXTWSAEW	SAE Torque Wrench Handle
TLXTW58	5/8" Head
TLXTW1116	11/16" Head
TLXTW1316	13/16" Head
TLXTW1516	15/16" Head
TLXTW1L116	1-1/16" Head
TLXTW1L516	1-5/16" Head

### ✂️ REPLACEMENT PARTS

TLXTWM	Complete Set of (6) Metric Wrench Heads
TLXTWMW	Metric Torque Wrench Handle
TLXTWM17	17mm
TLXTWM22	22mm
TLXTWM24	24mm
TLXTWM26	26mm
TLXTWM27	27mm
TLXTWM29	29mm

## PRO-SET WRENCHES

### PRO-SET® ADJUSTABLE JAW HANDLE WRENCHES

- Precision machined for smooth operation
- Comfortable grip, permanently molded rubber handles reduces fatigue
- Durable and environment-resistant
- With printed display card
- Packed in clear sealed clamshell
- One year warranty
- Jaw opening (inch marks) on front

**T LAW12**

**T LAW10**

**T LAW08**

**T LAW06**



	T LAW06	T LAW08	T LAW10	T LAW12
Size	6"	8"	10"	12"
Jaw capacity	1" (25 mm)	1-1/4" (30 mm)	1-3/8" (35 mm)	1-1/2" (40 mm)

## PRO-SET SERVICE WRENCHES



**TLSWL**



SHAPE - □ ◻

- Large, straight. Square & hex drive
- 3/16", 1/4" Square Drive
- 1/2", 9/16" Hex Drive
- Embossed fractions and logo
- Durable, high quality, polished chrome finish

**TLSWLB IN BULK (100 PCS)**

**TLSWO**



SHAPE - □

- Small, offset. Square drive
- 3/16", 1/4", 5/16", 3/8" Square Drive
- Offset ends
- Embossed fractions and logo
- Durable, high quality, polished chrome finish

**TLSWOB IN BULK (100 PCS)**

**TLSWOA WRENCH PLUS 3/16" & 5/16" HEX DRIVER BIT**

**TLSWS**



SHAPE - □

- Small, straight. Square drive
- 3/16", 1/4", 5/16", 3/8" Square Drive
- Embossed fractions and logo
- Durable, high quality, polished chrome finish

**TLSWSB IN BULK (100 PCS)**

**TLSWSA WRENCH PLUS 3/16" & 5/16" HEX DRIVER BIT**

## TECH-SET SERVICE WRENCHES



**TSWSH**

- Large, straight
- Square Drive: 3/16" & 1/4"
- Hex Drive: 1/2" & 9/16"
- Metal handles with frosted finish and blister card packaging

**TSWSO**

- Small, offset
- Square Drive: 3/16", 1/4", 5/16", 3/8"
- Metal handles with frosted finish and blister card packaging

**TSWS**

- Small, straight
- Square Drive: 3/16", 1/4", 5/16", 3/8"
- Metal handles with frosted finish and blister card packaging

## PRO-SET HEX, TORX, BALL END FOLDING WRENCHES



### TLSWH

SHAPE - 

- Hex ends (Inch)
- Nickel Plated
- 5/64", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"
- Clamshell packaging with display card



### TLSWHM

SHAPE - 

- Hex ends (Metric)
- Nickel Plated
- 1.5, 2, 2.5, 3, 4, 5, 6, 8 mm
- Clamshell packaging with display card



### TLSWT

SHAPE - 

- Torx ends
- Nickel Plated



### TLSWB

SHAPE - 

- Ball point ends (Inch)
- Nickel Plated
- 5/64", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4"
- Clamshell packaging with display card

#TLSWHB Combo Set: Includes TLSWH (Inch Hex Key) & TLSWB (Inch Ball Point Key Set)

## TECH-SET INSPECTION MIRRORS




### TLMIR1

- Circular Telescoping Mirror
- 1-1/4" diameter



### TLMIR2

- Circular Telescoping Mirror
- 2-1/4" diameter

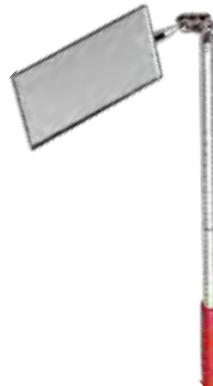

### TLMIR3

- Rectangular Telescoping Mirror
- 3-1/2" x 2"



### TLMIR4

- Oval Pocket Mirror
- 1" x 2"

### TLDKRH CPS DUCT KNIFE

Used to cut fiberglass duct board. Stainless steel double edge resharpenable blade facilitates easy piercing for inside cuts. The double edge is also ideal for tapping into and trimming flex duct. Ergonomic cushioned handle.

- 6" (152 mm) Duct Knife With Rubber Handle
- One edged serrated for sawing.



## TECH-SET FIN COMBS



**TLFC1** Universal Metal Fin Comb



**TLFC6**

**Universal 6-sided fin comb straightening tool**

- Repair bent condenser fins
- For 8,9,10,12, 14 or 15 fins per inch



**TLFC2** Fin Straightener

- Large durable, easy grip handle

## TECH-SET PLIERS



**TLPO** Pinch-Off Pliers

- Tool locks onto tubing to prevent loss of refrigerant during service
- Rounded jaws to avoid cutting tubing
- 1 year warranty



**TLPP** Tube Piercing Pliers

- Tube Piercing Pliers 1/4"
- TLPPX Replacement Tip
- Quick release handle



**TLPK** Swage Punch Set

- 5 Punches (1/4", 5/16", 3/8", 1/2", 5/8")



**TLMSP** 6-in-1 Swaging Punch

- (3/16", 1/4", 5/16", 3/8", 1/2", 5/8")
- Swages six sizes of tubing
- Chrome plated for strength and durability



**TLPORR**

- PRO-SET Pinch-Off & Re-Round Tool
- Pinch-Off tool & rerounds 1/4", 5/16", 3/8", and 1/2" copper and tubing


## BLACKMAX<sup>®</sup> GEAR & PULLEY REMOVERS



**BTLGP4**



**BTLGP7**

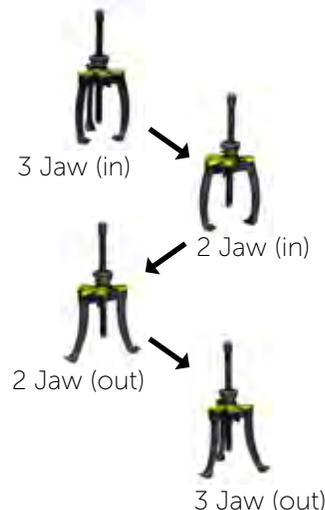

Description	3" to 4" (76 to 102mm)	3" to 7" (76 to 178mm)
Jaw Reach	3.75" (95mm)	5.5" (140mm)
Jaw Spread	11.5" (292mm)	17" (432mm)
Max. Force	24,000 Lbs (106,500 N)	42,000 Lbs (186,500 N)
Removable Jaws	2 or 3 (Quick Change, Spring Loaded)	2 or 3 (Quick Change, Spring Loaded)

## PRO-SET REGULATOR



### **BRRN1** Nitrogen Regulator

- UL Listed
- Delivery Pressure 0-400 PSI
- Easy-to-read gauges with protective rubber gauge boots

## PRO-SET TORCHES



### **BRHT1** Hand Torch

- Auto-ignite torch
- Adjustable flame control
- For use with propylene (MAPPRO), MAPP and Propane
- CGA600 Inlet Connection
- Cast aluminum and stainless steel burn tube construction
- Flame lock button, precise flame adjustment
- Clamshell packaging

### **✂** REPLACEMENT PARTS

BRXHTST1 | Replacement Torch Tip



### **BRHT5** Hand Torch With 5' Hose & Valve

- Auto-ignite torch
- Adjustable flame control
- For use with propylene (MAPPRO), MAPP and Propane
- CGA600 Inlet Connection
- Brass regulator, composite handle & stainless steel burn tube
- New brass regulator with 5 ft hose and valve
- Clamshell packaging

## TECH-SET TORCH



### **BRHTS1** Swivel Hand Torch

- Manual Ignition
- Adjustable flame control
- For use with propylene (MAPPRO), MAPP and Propane
- CGA600 Inlet Connection
- Clamshell packaging

### **✂** REPLACEMENT PARTS

BRXHTS1 | Replacement Torch Burner Tube Assembly



### **BRHTS1A** Swivel Hand Torch

- Auto-ignite torch
- Adjustable flame control
- For use with propylene (MAPPRO), MAPP and Propane
- CGA600 Inlet Connection
- Brass regulator & stainless steel burn tube
- Torch tube swivels 360 degrees, operates in any position
- Clamshell packaging

### **✂** REPLACEMENT PARTS

BRXHTST1 | Replacement Torch Tip

# BRASS ADAPTERS, FITTINGS & VALVE CORE TOOLS



ADAPTERS					
Female	Male	Description	Application	Qty / Pk	Item
3/16" SAE	1/4" SAE	no valve core	TLVC Valve Core Tool for R-12 Auto. HI-side	1	<b>AD36</b>
		with valve core		1	<b>AD36C</b>
	1/4" SAE 90°	w/ valve core	Automotive adapter	1	<b>AD369C</b>
1/4" SAE	1/8" SAE	w/ valve core	Manifolds, compressors	1	<b>AD18C</b>
	1/4" SAE 90°		Automotive adapter	1	<b>AD149C</b>
	1/2" ACME		Vacuum pumps/manifolds/recovery/tanks	3	<b>AD48</b>
				50	<b>AD48B</b>
	3/8" SAE	w/core & depressor	Vacuum pumps	1	<b>AD64</b>
	5/16" SAE	w/ valve core	R-410A International	1	<b>AD78</b>
			100	<b>AD78B</b>	
5/16" SAE	1/4" SAE	w/ valve core	R-410A International	1	<b>AD87</b>
				100	<b>AD87B</b>
5/16" (Swivel)	1/4" SAE 55°			1	<b>AD87S</b>
1/2" ACME	3/8" SAE	w/core & depressor	Vacuum pumps	3	<b>AD68</b>
	Low side R-134a	-	R-134a automotive tanks	1	<b>AD12</b>
	1/4" SAE	no valve core	Vacuum pumps/manifolds/recovery/tanks	3	<b>AD84</b>
		w/ valve core		100	<b>AD84B</b>
			3	<b>AD84C</b>	
1/2" ACME (90°)	1/4" SAE	w/ valve core	Automotive adapter	3	<b>AD849C</b>
1/2" SAE	3/8" SAE	w/core & depressor	Vacuum pumps	1	<b>AD68V</b>
3/4" -14	3/8" SAE	w/ gasket	Large 125 lb tank adapters	1	<b>AD61</b>
				100	<b>AD61B</b>
	1/4" SAE			1	<b>AD41</b>
				100	<b>AD41B</b>
	5/16" SAE			1	<b>AD71</b>
	1/2" ACME		1	<b>AD81</b>	
			100	<b>AD81B</b>	
-	1/4" SAE x 1/8" MNPT	w/ cap and valve core	Manifolds, compressors	6	<b>AD24</b>
				100	<b>AD24B</b>
	1/4" SAE x 1/4" MNPT	w/ cap and valve core	Vacuum Pumps, compressors	6	<b>AD44</b>
				100	<b>AD44B</b>
	14 mm x 1/4" SAE		R-134a automotive couplers	1	<b>AD14</b>
1/4" SAE x 1/4" SAE Union		1/4" Hose union	1	<b>AD47</b>	
			100	<b>AD47B</b>	
21.8 Whitworth	3/8" SAE	w/ gasket	Large cylinder adapter	1	<b>AD91</b>
				100	<b>AD91B</b>
Replacement fiber washer for AD41 /61 /71 /81 tank adapters				1	<b>ADXFW</b>



**ADAPTERS - TEES CONNECTORS**

Description		Qty/ Pk	Item
1/4" SAE M (with cap and core)	x 1/4" SAE M	x 1/4" SAE FM hex	3 <b>AVT64</b>
		x 1/8" MNPT	100 <b>AVT64B</b>
		x 1/4" MNPT	3 <b>AVT2P</b>
		x 1/4" SAE FM, no depressors	3 <b>AVT4P</b>
		x 1/4" SAE FM, no depressors	1 <b>AVT64Z</b>
1/4" SAE M	x 1/8" MNPT	x 1/4" SAE M	3 <b>AVT4</b>
		x 1/4" SAE female knurl	3 <b>AVT45</b>
	x 1/8" MNPT	x 1/2" ACME M	1 <b>AVT48</b>
		x 1/4" SAE M w/ Core	3 <b>AVT4M</b>
1/4" SAE Female Hex	x 5/16" SAE female knurl	x 1/2"-20 M Adapter Fitting	1 <b>AVT87</b>
	x 1/4" SAE M	x 1/4" SAE M with cap and core	3 <b>AVT44</b>



**COPPER TUBE EXTENSION VALVES**

Description		Standard Cap		Wrench Cap	
Outer Diameter	Inner Diameter	6pk	100pk	6pk	100pk
1/8"	1/16"	<b>AV2</b>	<b>AV2B</b>	<b>AV2R</b>	<b>AV2RB*</b>
3/16"	1/8"	<b>AV3</b>	<b>AV3B</b>	<b>AV3R</b>	<b>AV3RB</b>
1/4"	3/16"	<b>AV4</b>	<b>AV4B</b>	<b>AV4R</b>	<b>AV4RB*</b>
	3/16" W/4" COP-TB EXT	<b>AV4L</b>	<b>AV4LB*</b>	<b>AV4LR</b>	<b>AV4LRB</b>
5/16"	1/4"	<b>AV5</b>	<b>AV5B*</b>	<b>AV5R</b>	<b>AV5RB*</b>
5/16" (1/2"-20) ACCES, 1/4"	3/16"	<b>AV4410</b>	<b>AV4410B</b>	N/A	N/A
3/8"	5/16"	<b>AV6</b>	<b>AV6B</b>	<b>AV6R</b>	<b>AV6RB*</b>
6 mm	5 mm	<b>AV6MM</b>	<b>AV6MB</b>	<b>AV6MR</b>	<b>AV6MRB</b>

\*Non-stock item. Call for availability



AVB34



AVB46



AVB346



AVB6



AVB456

**MULTI-STEP BODIES**

Inner Diameter	Outer Diameter	Notes	ITEM	
			6pk	100pk
1/8"	3/16", 1/4", 5/16" SLDR		AVB456	AVB456B
3/16"	1/4" SLDR		AVB34	AVB34B
	1/4" x 3/8" SLDR	(assembled)	AVB346 (assembled)	AVB346B
		(unassembled)		AVB346BU
		(cap w/core tool)		AVB346RB
	AVB346B0			
1/4"	3/8" SLDR		AVB46	AVB46B
6-8-10mm SLDR		(w/caps)	AVB6	AVB6B
		(w/o caps)		AVB6BC



AVC134C



AVC8C



AVC4/ AVC425/ AVC4B



AVC4C/ AVC4CB



AVC4P/ AVC4PB



AVC4PS



AVC4R/ AVC4RB



AVC410/ AVC410B



AVC410C/ AVC410CB



AVC6C/ AVC6CB



AVC6P



AVCVAC

**QUICK SEAL O-RING CAPS**

Thread	Description	Qty / Pk	ITEM
1/2"	ACME brass cap w/chain tether	2	AVC134C
	ACME plastic cap w/ straps	2	AVC134PS
	SAE brass cap w/chain tether	2	AVC8C
1/4"	SAE brass caps	10	AVC4
		25	AVC425
		100	AVC4B
	SAE brass cap w/chain tether	2	AVC4C
		100	AVC4CB
	SAE plastic caps	6	AVC4P
		100	AVC4PB
	SAE plastic caps w/ straps	6	AVC4PS
SAE brass cap w/core remover	6	AVC4R	
5/16"	R-410A brass cap	10	AVC410
		100	AVC410B
	brass cap w/chain tether	2	AVC410C
		100	AVC410CB
3/8"	SAE brass cap w/chain tether	2	AVC6C
		100	AVC6CB
	SAE plastic caps	3	AVC6P
na	R-134a hl side caps	10	AVC134H
	R-134a low side caps	10	AVC134L
1/4", 1/2", 3/8"	SAE Vacuum pump brass cap kit w/chain	1 each	AVCVAC

**COPPER TUBE TEES**

Description	Outer Diameter	Qty / Pk	ITEM
1/4" SAE	5/16"	3	AVCT5
	3/8"	3	AVCT6
	1/4"	3	AVCT4
	1-1/8"	1	AVCT18
1/4"	5/8"	1	AVCT10
	1/2"	3	AVCT8
	3/4"	1	AVCT12
	7/8"	1	AVCT14



**VALVE CORES**

Description	Qty / Pk	Item
Valve cores	10	<b>AVS1</b>
	25	<b>AVS125</b>
	100	<b>AVS1B</b>
	1000	<b>AVS1BC</b>
Tech-Set valve cores w/1 cap in vial	1	<b>AVS1V</b>
1/4" SAE x 1/4" F swivel	3	<b>AVS44</b>



**AVS1/ AVS125/  
AVS1B/ AVS1BC**



**AVS1V**



**AVS44**

**VALVE CORE TOOLS**

Description	Qty / Pk	Item
1/4" SAE Core Remover / Installer Tool	1	<b>TLVC</b>
Pocket Valve Core Tool w/ 4 Spare Cores	1	<b>TLVC1</b>
Dual Valve Core Tool (1/4" SAE Valves & Auto R-134a Valves)	1	<b>TLVC2</b>
	100	<b>TLVC2B</b>
4-Way 1/4" & 3/16" SAE Valve Core / Thread Chaser	1	<b>TLVC4</b>
5/16" SAE Valve Core Remover / Installer Tool	1	<b>TLVC410</b>
Mini-Split 5/16" F x 1/4" M Valve Core Tool	1	<b>TLVC410A</b>
1/4" SAE Valve Core Remover / Installer Tool w/ Side Port	1	<b>TLVCS</b>
5/16" FM x 5/16" Male Valve Core Remover / Installer Tool w/ 5/16" Side Port	1	<b>TLVCS410</b>
5/16" FM x 1/4" SAE Male Valve Core Remover / Installer Tool w/ 1/4" Male Side Port	1	<b>TLVCS410A</b>



**TLVC**



**TLVC1**



**TLVC2/TLVC2B**



**TLVC4**



**TLVC410**



**TLVC410A**



**TLVCS**



**TLVCS410**

**BACK-SEATING CONTROL VALVES**

Description	Qty / Pk	Item
1/4" SAE M X 1/4" SAE FM Back-Seating Valve	1	<b>TLVCD1</b>
5/16" SAE M X 5/16" SAE FM Back-Seating Valve	1	<b>TLVCD2</b>
1/4" SAE M X 5/16" SAE FM Back-Seating Valve	1	<b>TLVCD3</b>



**TLVCD3**

**MICROSEAL™ QUICK COUPLERS**

Female	Male	Description	Qty / Pk	Item
1/4" SAE	1/4" SAE	Straight	1	AB
			3	AB3
		45° female	1	AB45
		90° female	1	AB90
	3		AB903	
	1/8"	FPT Adapter	1	ABG18
5/16" SAE	5/16" SAE		1	AB410
			3	AB4103
	1/4" SAE	90° female	1	AB41090A
		Straight	1	AB410A
1/2" ACME	1/2" ACME	Straight	1	AB12



**COMPACT BALL VALVES**

Female	Male	Other	Qty / Pk	ITEM
1/8" MPT	5/16"	MPT	1	BV41018
3/8" SAE	3/8" SAE	Straight	1	BV38
	1/4" SAE		1	BVAD38
1/4" SAE	1/4" SAE	Straight	1	BV
			3	BV3
		45° female	1	BV45
			3	BV453
		90° female	1	BV90
			3	BV903
1/2" ACME	1/2" ACME		1	BV12
	1/4" SAE			BVAD24
5/16"	1/4" SAE	Straight	1	BV410
		for R-410A systems w/neoprene gaskets	1	BV410A
		for R-410A Systems w/Teflon® gaskets	1	BV410AJ
		90° female	1	BV41090A
	1/4" SAE x 1/4" SAE	Straight	1	BVM
			3	BVM3
Replacement Ball Valve Handle w/Yellow, Blue, Red inserts ( 1/each)			3	BVXH





## REDUCES DAMAGING IN-RUSH CURRENT BY UP TO 50%!

### 5-2-1® COMPRESSOR SAVER®

Start-up is the most punishing task for any type of electrical equipment due to the surge of current when power is first applied. A/C compressors can consume up to 45,000 watts!

The 5-2-1 Compressor Saver significantly reduces the time the compressor draws high amperage at start-up by combining a powerful multi-layer starting capacitor with a smart switch to safely give the compressor the burst it needs to start up quickly and reliably, while drawing less power. Less power means lower energy bills, too.

- Perfect add-on service for HVAC technicians—high profit, easy and fast to install, and easy to sell.
- Customers experience immediate results.
- Adds years to the life of your compressor and other electrical components associated with your A/C system.
- Reduce damaging in-rush current by up to 50%.

## 5-2-1®

Remember: 5-2-1  
Common-Start-Run



Watch the video by scanning the QR Code.



**CSRU1**

For 1 to 3 Ton units



**CSRU2**

For 3-1/2 to 5 Ton units



**CSRU3**

For 4 to 5 Ton units

## MAXIMUM SURGE PROTECTION

### 5-2-1<sup>®</sup> SURGE PROTECTOR

The 5-2-1 Surge Protection device incorporates the latest in patented surge protection technology providing up to 70% MORE PROTECTION than similar value priced alternatives\*. Plus, no other brand has a separate visible alarm that indicates when the unit has suffered significant damage and needs to be replaced.

#### Professionally Installed Surge Protection

- Protects against power surges
- Protects against lightning strike surges
- Protects against utility grid "Spikes"
- Protects vital system components

#### Dual Visual Indicators

Home owners and contractors alike love our dual indicator lights. No more wasting time or money dealing with a single indicator light. Our products come with two lights - a red light to indicate if power is present and a green light to indicate that the product is providing protection. With two lights on, you can rest assured knowing that the system is properly protected.

#### Features:

- Device built with patented MOV parts
- Green LED indicates surge protection is present
- Red LED indicates that power is present independent of the surge protection status
- TUV Certified UL 1449 3rd Edition
- Type 4X enclosure
- Easy installation
- Low cost, high performance

#### Contractor Benefits:

- Promote additional profits
- Marketing materials available FREE of charge
- Protect your customer's equipment
- Reduce callbacks
- Increase customer referrals

#### Single Phase Surge Protection

- Circuit Boards
- Air Conditioners
- Furnaces
- Heat Pumps
- Refrigeration Systems



Watch the video by scanning the QR Code.



**SPD60**

*Rated up to 60,000 amps*



**SPD150**

*Rated up to 100,000 amps*

\*Based on maximum energy dissipation (Joule) rating

## MAXIMUM SURGE PROTECTION

### TPSPD 5-2-1<sup>®</sup> THERMALLY PROTECTED SURGE PROTECTOR

The 5-2-1 Thermally Protected Surge Protective Device incorporates the latest in Thermally Protected MOV technology and ease of installation. These devices are designed to protect your equipment by suppressing the harmful energy produced by lightning strikes and other power line transients commonly found in HVAC installations. The voltage surges or spikes can be very damaging to HVAC equipment, shortening the life of the compressor and reducing its efficiency.

#### Protection For:

- Entire HVAC unit
- Furnaces
- Heat pumps
- Motors
- Refrigeration systems
- Electro-mechanical devices

#### Features:

- Patented thermal protection MOV technology
- Type 1 or 2 device offers easy installation at the A/C disconnect, junction box or electrical panel
- Highest SCCR (short-circuit current rating)
- Certified to **UL-1449** 4th edition
- Diagnostic Light: Green LED indicates surge protection is present
- Type 4X enclosure
- 3 year warranty

#### Contractor Benefits:

- Protect your customer's equipment
- Promote additional profits
- Marketing materials available FREE of charge

### SPECIFICATIONS

Type	1 or 2 - 120/240VAC 50-60Hz
Maximum Surge Current	100 000 Amps
In	20kA, SCCR = 200kA
MCOV	150VAC L-N 300VAC L-L
VPR	600VAC L-N/G 1200VAC L-L
Approvals	ANSI/UL 1449 4th
Enclosure	Nema Type 4X



# MERCHANDISING 5-2-1 PRODUCTS IN YOUR SHOWROOM



Gondola end caps are an excellent way to display 5-2-1 products in your showroom. A standard 60" x 36" x 16" (1.5m x 0.91m x 0.4m) end cap holds a large quantity of 5-2-1 products (see chart below) and makes these products visible and accessible to your customers.

An additional way to attract customers is to purchase the optional 5-2-1 Compressor Saver end cap header.


Thirty percent of all store sales come from end-of-aisle displays, so contact your CPS 5-2-1 sales representative to purchase 5-2-1 products for your showroom end cap!

## FOR A TYPICAL END CAP SHOWN

Product	Qty
CSRU1 Compressor Saver	25
CSRU2 Compressor Saver	25
CSRU3 Compressor Saver	25
SPD60 Surge Protector	20



## Optional Accessories For End Cap

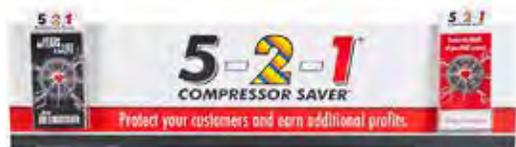

### GECH521 Header - For 5-2-1 Products

Attach to pegboard, slatwall or an end cap

- 33.75" L x 8" H x 1/8"

**CPS Products, Inc. USA (Headquarters)**

1010 East 31st Street, Hialeah, Florida 33013, USA  
Tel: 305-687-4121, 1-800-277-3808, Fax: 305-687-3743  
E-mail: [info@cpsproducts.com](mailto:info@cpsproducts.com)  
Website: [www.cpsproducts.com](http://www.cpsproducts.com)

**CPS Products Canada Ltd.**

1324 Blundell Road, Mississauga, ON, L4Y 1M5  
Tel: 905-615-8620, Fax: 905-615-9745  
E-mail: [info@cpsproducts.com](mailto:info@cpsproducts.com)  
Website: [www.cpsproducts.com](http://www.cpsproducts.com)

**CPS PRODUCTS N.V**

Krijgsbaan 241, 2070 Zwijndrecht, Belgium  
Tel: (323) 281 30 40, Fax: (323) 281 65 83  
E-mail: [info@cpsproducts.be](mailto:info@cpsproducts.be)  
Website: [www.cpsproducts.be](http://www.cpsproducts.be)

**CPS AUSTRALIA PTY. LTD.**

109 Welland Avenue, Welland, South Australia 5007  
Tel: +61 8 8340 7055, Fax: +61 8 8340 7033  
E-mail: [sales@cpsaustralia.com.au](mailto:sales@cpsaustralia.com.au)

**cps<sup>®</sup>**

**PRODUCT GUARANTEE:**

CPS guarantees that all products are free of manufacturing and material defects for one year from the date of purchase. If a product should fail during the guarantee period due to defective material or workmanship, it will be repaired or replaced (at our office) at no charge. This guarantee does not apply to products that have been altered, misused, or are in need of field service maintenance. All repaired products will carry an independent 90 day warranty.

Connect with us at:

