

# Environmental Product Declaration



In accordance with ISO 14025 and EN 15804:2012+A2:2019/AC:2021 for:

## Altech foam insulated copper pipes - Altech isolerade kylkopparrör

from

*Saint-Gobain Distribution Sweden AB*



**SGDS GRUPPEN**

BEVEGO DAHL// OPTIMERA/ KAKEL KONRADSSONS

Program:

Program operator:

EPD registration  
number:

Publication date:

Valid until:

The International EPD<sup>®</sup> System, [www.environdec.com](http://www.environdec.com)

EPD International AB

S-P-12720

2024-06-05

2029-06-04

*EPD of multiple products, based on worst-case results.*

*An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com)*



## General information

### Programme information

<b>Programme:</b>	The International EPD® System
<b>Address:</b>	EPD International AB Box 210 60 SE-100 31 Stockholm Sweden
<b>Website:</b>	<a href="http://www.environdec.com">www.environdec.com</a>
<b>E-mail:</b>	<a href="mailto:info@environdec.com">info@environdec.com</a>

<b>Accountabilities for PCR, LCA and independent, third-party verification</b>
<b>Product Category Rules (PCR):</b> Construction Products PCR 2019:14 version 1.3.3
CEN standard EN 15804:2012+A2:2019/AC:2021 serves as the Core Product Category Rules (PCR)
PCR review was conducted by: The Technical Committee of the International EPD® System.
<b>Life Cycle Assessment (LCA)</b>
LCA accountability: Fanni Végvári, CarbonZero AB
<b>Third-party verification</b>
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:  <input checked="" type="checkbox"/> EPD verification by the individual verifier  Third-party verifier: Stephen Forson, Viridis Pride Ltd., UK  Approved by: The International EPD® System  Procedure for follow-up of data during EPD validity involves third party verifier:  <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025.

## Company information

<b>Owner of the EPD</b>	Saint-Gobain Distribution Sweden AB Bryggerivägen 9 168 67 Bromma Stockholm
<b>Contact</b>	SGDS - Beriar Maroof ( <a href="mailto:beriar.maroof@sgdsgruppen.se">beriar.maroof@sgdsgruppen.se</a> )
<b>Description of the organisation</b>	<p>Saint-Gobain Distribution Sweden AB - specialists in collaboration for more efficient business in construction and installation. Saint-Gobain Distribution Sweden AB is the head company of some of Sweden's leading trading companies in construction, sheet metal, tiles and installation. All the companies have long and solid industry experience and provide most of Sweden's craftsmen with materials for various projects. Customers in different companies can also buy support items from the sister companies in the group, and in selected cases, we take joint projects to facilitate the logistics of the supply of goods, which is then often critical for a smooth construction project.</p> <ul style="list-style-type: none"> <li>• Optimera - construction trade for professional carpenters</li> <li>• Dahl – heat, plumbing and sanitary specialist</li> <li>• Bevego - building sheet metal, ventilation and technical insulation</li> <li>• Kakelspecialisten and Konradsson's Tiles - tiles, tiling and bathroom fittings</li> </ul> <p>The company's focus is on sales and services with direct contact to about 150,000 customers regularly.</p> <p>Saint-Gobain Distribution Sweden AB is owned by Saint-Gobain with a presence in 64 countries and over 190 000 employees worldwide.</p>
<b>Location of production site</b>	Oinofyta, Greece




## Product information

<b>Product name</b>	Altech foam insulated copper pipes - Altech isolerade kylkopparrör
<b>Product identification</b>	Copper pipes
<b>Product description</b>	This product is made of copper and polyethylene foam.
<b>Use</b>	Altech Insulated refrigerant pipes of very high quality. At least 99.9% copper. Worked easily even at low temperatures. Soft UV resistant insulation of polyethylene with closed microcells, withstands aggressive environment and ensures a long service life.
<b>Technical data</b>	Made in Europe in accordance with EN 12735-1. Supplied in 20-meter loop with sealed ends.
<b>UN CPC code</b>	41516 - Tubes, pipes and tube or pipe fittings, of copper

## LCA information

<b>Functional unit / declared unit</b>	1 kg of Altech isolated copper pipes - Altech isolerade kylkopparrör
<b>Reference service life</b>	Not applicable
<b>Database(s) and LCA software used</b>	Calculation completed in LCA for Experts v10.7 with an integrated Ecoinvent database 3.8
<b>System boundaries</b>	Cradle to gate, with options. (A1-A3, A4-A5, C1-C4, D)

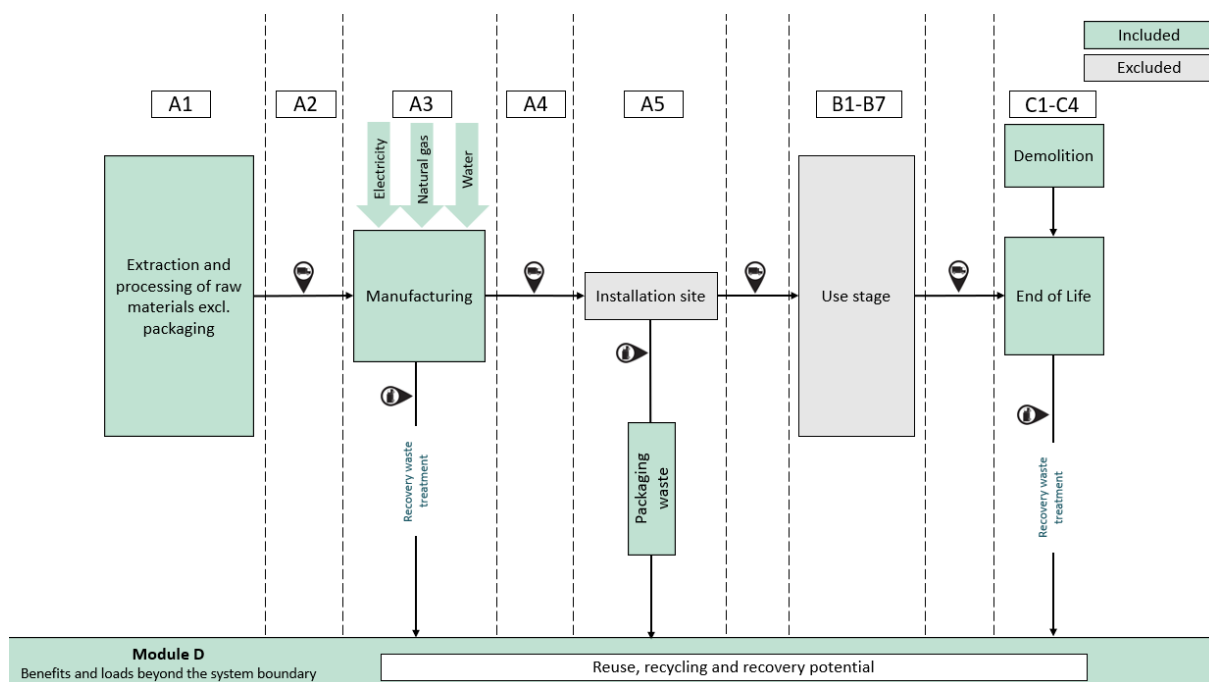

### **More information**

The EPD covers the following range of products from Dahl:

- Altech isolated copper pipes - Altech isolerade kylkopparrör

Article number single pipes	Dimensions (inch)	Article number double pipes	Dimensions (inch)	Length (m)
K5131302	1/4	K5131320	1/4 x 3/8	20
K5131304	3/8	K5131322	1/4 x 1/2	20
K5131306	1/2	K5131324	1/4 x 5/8	20
K5131308	5/8	K5131326	3/8 x 1/2	20
K5131310	3/4	K5131328	3/8 x 5/8	20
K5131312	7/8	K5131330	3/8 x 3/4	20

### ***A1, Raw material supply***

This module considers the extraction and processing of all raw materials, energy, and transportation which occur upstream of the studied manufacturing process.

### ***A2, transport to the manufacturer***

This module includes the transportation of raw materials to the manufacturing site.

### ***A3, manufacturing***

This module includes all resources used during the production of Altech insulated copper pipes and waste produced. This also includes additives and packaging material. Data has been collected by the manufacturer from the production year of 2021, the full 12 months from January 2021 to December 2023.

### ***A4, Transport***

Transportation from the manufacturing site in Greece to Saint-Gobain Distribution Sweden AB's distribution center and then from the distribution center to the building site is included.

Scenario information	Unit (expressed per declared unit)
Fuel type and consumption of vehicle or vehicle type used for transport e.g. long distance truck, boat etc.	Average truck trailer with a 27 t payload 0,019 l/tkm diesel
Distance	3 370 + 350 km
Capacity utilisation (including empty returns)	61%
Volume capacity utilisation factor (factor: =1 or <1 or 1 for compressed or nested packaged products)	Not applicable

### ***A5, Construction installation***

This stage is partially included to balance the biogenic content in packaging.

### ***B1-B7 Use stage***

This stage is not declared.

### ***C1 Deconstruction/Demolition***

This stage includes the de-construction and/or demolition of the insulated copper pipes.

### ***C2 Transport***

This module represents the transport distance to the waste processing facility.

### ***C3 Waste processing***

This module includes any waste treatment needed.

### ***C4 Final disposal***

This module includes any material that is landfilled.

Processes	Unit (expressed per declared unit)
Collection process specified by type	1 kg collected
	0 kg collected with mixed construction waste
Recovery system specified by type	0 kg for re-use
	0,913 kg for recycling
	0,037 kg for energy recovery
Disposal specified by type	0,05 kg product or material for final deposition
Assumptions for scenario development, e.g. transportation	The transportation model is modelled as in module A4, except the transportation distance is assumed to be 50 km to the waste processing.

### ***D Benefits and loads beyond the system boundary***

This module includes emission credits obtained from energy recovery and/or recycling materials.

### ***Omissions of life cycle stages***

The following flows were excluded from the system boundary:

- **A1-A3:** The plants, production of machines and transportation systems are excluded since the related flows are supposed to be negligible compared to the potential environmental impacts through the life cycle of the product
- **A5:** The installation of the products
- **B1-B7:** The use phase of the products is not included

In addition, the following flows are excluded from the system boundaries:

- Flows related to human activities, such as employee transport

### ***Cut-off criteria***

The following procedures were followed for the exclusion of inputs and output.

- All input and output flows in a unit process were considered i.e., taking into account the value of all flows in the unit process and the corresponding LCI where data was available
- Data gaps were filled by conservative assumptions with average or generic data. Any assumptions in such cases were documented
- The use of cut-off criterion on mass inputs and primary energy at the unit process level (1%) and at the information module level (5%)

All hazardous and toxic materials and substances are included in the inventory and the cut-off rules do not apply.

## Content declaration

### Content

Content declaration	Amount (kg)
Copper	0,95
Polyethyleme foam	0,05
<b>Total</b>	<b>1</b>

Packaging materials	Weight, kg	Weight-% (versus the product)
Cardboard	5,43E-02	5,43
LDPE	1,97E-02	1,97
PP	5,62E-04	0,0562
Metal	6,81E-05	0,00681
Pallet	7,72E-02	7,72
<b>Total</b>	<b>0,152</b>	<b>15,20%</b>



### Modules declared and geographical scope

	Product stage			Assembly stage		Use stage							End of life stage				Benefits & loads beyond system boundary
	Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling-potential
Modules	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X
Geography	GR	GR	GR	EU	SE	-	-	-	-	-	-	-	SE	SE	SE	SE	SE
Specific data used	8%				-	-	-	-	-	-	-	-	-	-	-	-	-
Variation products	0%				-	-	-	-	-	-	-	-	-	-	-	-	-
Variation sites	0%				-	-	-	-	-	-	-	-	-	-	-	-	-



		Results per declared unit: 1 kg							
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO2 eq	3,03E+00	2,79E-01	1,79E-01	6,34E-04	1,19E-04	2,47E-01	2,08E-03	-1,55E+00
GWP-fossil	kg CO2 eq	3,19E+00	2,67E-01	5,19E-02	6,07E-04	1,16E-04	2,46E-01	2,10E-03	-1,64E+00
GWP-biogenic	kg CO2 eq	-1,72E-01	1,20E-02	1,27E-01	2,74E-05	3,44E-06	3,30E-02	2,60E-05	-8,90E-02
GWP-luluc	kg CO2 eq	8,12E-03	1,51E-05	2,10E-06	3,37E-08	8,70E-09	8,03E-06	2,14E-06	-2,82E-04
ODP	kg CFC-11 eq	8,57E-09	6,23E-08	1,51E-11	1,40E-10	1,76E-11	9,78E-11	3,47E-15	-1,34E-12
AP	mole H+ eq	4,15E-02	7,88E-04	3,39E-05	3,70E-06	1,30E-06	7,43E-05	6,75E-06	-3,86E-03
EP-freshwater	kg P eq	1,27E-05	2,85E-06	2,79E-07	6,38E-09	1,06E-09	1,41E-06	1,90E-09	-1,59E-06
EP-marine	kg N eq	2,65E-03	2,32E-04	1,02E-05	1,49E-06	3,33E-07	2,57E-05	1,70E-06	-6,83E-04
EP-terrestrial	mole N eq	2,76E-02	2,55E-03	1,35E-04	1,63E-05	3,62E-06	2,91E-04	1,86E-05	-6,20E-03
POCP	kg NMVOC eq	9,17E-03	5,80E-04	2,82E-05	4,33E-06	9,17E-07	7,43E-05	5,31E-06	-2,65E-03
ADP-minerals & metals*	kg Sb eq	1,79E-03	4,83E-08	7,19E-09	1,08E-10	2,06E-11	3,54E-08	5,76E-11	-8,26E-06
ADP-fossil*	MJ	4,32E+01	3,81E+00	6,34E-02	8,53E-03	2,69E-03	1,71E-01	3,14E-02	-1,95E+01
WDP*	m3	1,64E+00	4,02E-03	1,90E-02	9,00E-06	1,11E-05	2,34E-02	-2,86E-05	-1,21E-01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption								

## Use of resources

		Results per declared unit: 1 kg							
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	1,29E+01	1,11E-02	7,81E-03	2,23E-05	1,15E-03	-1,55E-03	2,82E-03	-2,17E+00
PERM	MJ	1,69E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PERT	MJ	1,30E+01	1,11E-02	7,81E-03	2,23E-05	1,15E-03	-1,55E-03	2,82E-03	-2,17E+00
PENRE	MJ	4,32E+01	3,81E+00	6,34E-02	8,53E-03	2,69E-03	1,71E-01	3,15E-02	-1,95E+01
PENRM	MJ	1,80E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	4,32E+01	3,81E+00	6,34E-02	8,53E-03	2,69E-03	1,71E-01	3,15E-02	-1,95E+01
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m3	2,95E-02	9,51E-05	4,33E-04	2,10E-07	1,69E-06	4,83E-04	3,54E-07	-1,49E-01
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water								

## Additional voluntary indicators

		Results per declared unit: 1 kg							
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG <sup>1</sup>	kg CO2 eq	3,20E+00	2,67E-01	5,20E-02	6,07E-04	1,16E-04	2,47E-01	2,11E-03	-1,64E+00
Acronyms	GWP-GHG global warming potential - greenhouse gases								

## Waste and output flows

### Waste

		Results per declared unit: 1 kg							
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
HWD	kg	3,37E-08	-2,42E-13	2,57E-12	0,00E+00	-2,41E-13	8,99E-12	2,60E-12	-1,38E-07
NHWD	kg	9,63E-01	1,49E-06	3,31E-03	0,00E+00	1,52E-06	3,55E-03	4,51E-02	-1,71E-01
RWD	kg	4,24E-04	4,33E-07	-1,06E-07	0,00E+00	4,34E-07	-9,63E-06	3,66E-07	-3,99E-04
Acronyms	HW Hazardous waste disposed; NHW Non-hazardous waste disposed; RW Radioactive waste disposed								

<sup>1</sup> This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO2 is set to zero.

### Output flows

		Results per declared unit: 1 kg							
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
CRU	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
MFR	kg	0,00E+00	0,00E+00	5,69E-02	0,00E+00	0,00E+00	8,81E-01	0,00E+00	0,00E+00
MER	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
EEE	MJ	0,00E+00	0,00E+00	-2,81E-01	0,00E+00	0,00E+00	-4,94E-01	0,00E+00	0,00E+00
EET	MJ	0,00E+00	0,00E+00	-5,04E-01	0,00E+00	0,00E+00	-8,79E-01	0,00E+00	0,00E+00
Acronyms	CRU Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy								

### Information on biogenic carbon content

Biogenic carbon content	Unit per DU	Amount
Biogenic carbon content in product	kg C	0
Biogenic carbon content in packaging	kg C	5,46E-02

1 kg biogenic carbon is equivalent to 44/12 kg CO<sub>2</sub>.


## Disclaimers

ILCD classification	Indicator	Disclaimer
ILCD Type 1	Global warming potential (GWP)	None
	Depletion potential of the stratospheric ozone layer (ODP)	None
	Potential incidence of disease due to PM emissions (PM)	None
ILCD Type 2	Acidification potential, Accumulated Exceedance (AP)	None
	Eutrophication potential, Fraction of nutrients reaching	None
	Freshwater end compartment (EP-freshwater)	
	Eutrophication potential, Fraction of nutrients reaching	None
	Marine end compartment (EP-marine)	
	Eutrophication potential, Accumulated Exceedance (EP-terrestrial)	None
	Formation potential of tropospheric ozone (POCP)	None
	Potential Human exposure efficiency relative to U235 (IRP)	1
ILCD Type 3	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2
	Abiotic depletion potential for fossil resources (ADP-fossil)	2
	Water (user) deprivation potential, deprivation-weighted	2
	Water consumption (WDP)	
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2
	Potential Comparative Toxic Unit for humans (HTP-c)	2
	Potential Comparative Toxic Unit for humans (HTP-nc)	2
	Potential Soil quality index (SQP)	2
Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.		
Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.		

## Additional information

Greenhouse gas emission from the use of electricity in the manufacturing phase.

Residual mix	Unit	Value
<b>Location</b>		Greece
<b>Electricity mix</b>		Biomass: 1,44% Geothermal: 0,15% Hard coal: 5,62% Heavy Fuel Oil: 7,74% Hydro: 4,69% Lignite: 10,17% Natural gas: 49,30% Nuclear: 3,45% Photovoltaic: 9,07% Wind: 8,35%
<b>Reference year</b>		2021
<b>Source</b>		European Residual Mixes 2021 - Association of Issuing Bodies
<b>GWP excl. Biogenic</b>	kg CO <sub>2</sub> -eq. /kWh	0,169

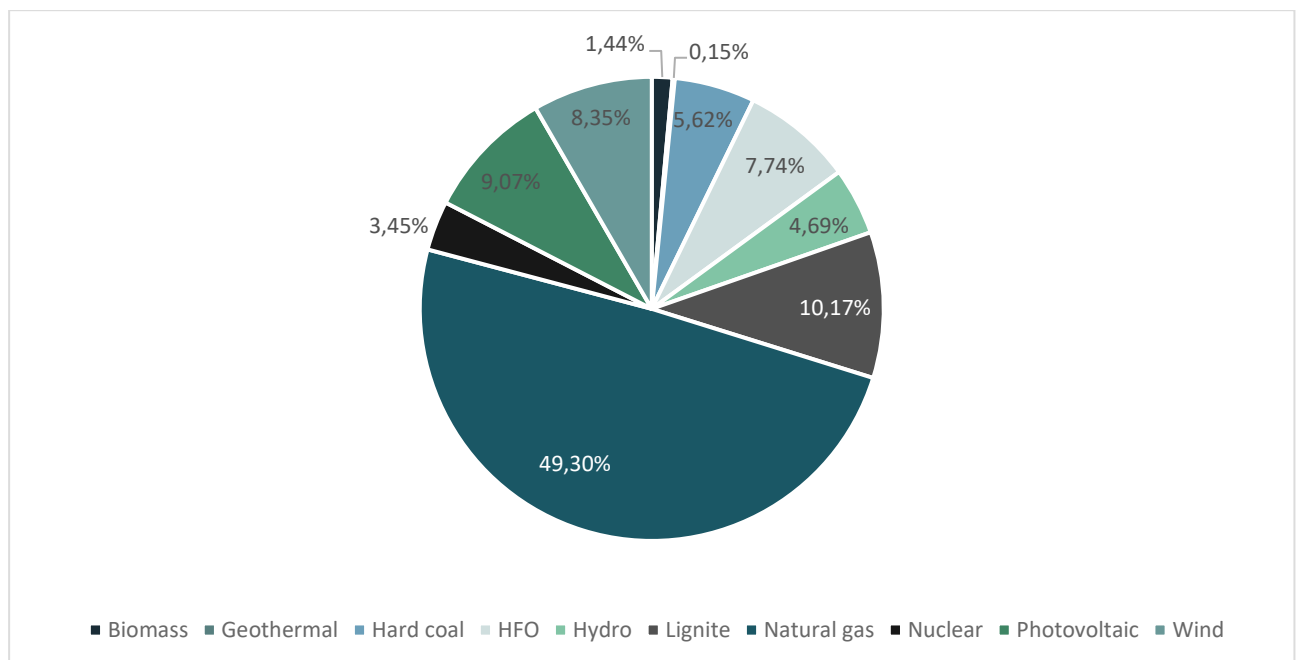

## References

Association of Issuing Bodies	AIB (2022) European Residual Mixes 2021. Ver. 1.0.
Construction Products PCR 2019:14 version 1.3.2	EPD International (2021) PCR 2019:14 Construction products and construction services, version 1.3.2
EN 15804:2012+A2:2019	Sustainability of construction works - Environmental product declaration - Core rules for the product category of construction products
GPI	General Programme Instructions of the International EPD® System. Version 4.
ISO 14020:2000	Environmental labels and declarations — General principles
ISO 14025:2010	Environmental labels and declarations - Type III environmental declarations - Principles and procedures
ISO 14044:2006	Environmental management - Life cycle assessment - Requirements and guidelines
SCB – Swedish Statistics	(2020) Treated waste by treatment category and waste category. Every second year 2010 - 2020 <a href="https://www.statistikdatabasen.scb.se/pxweb/en/ssd/START_MI_MI0305/MI0305T003/">https://www.statistikdatabasen.scb.se/pxweb/en/ssd/START_MI_MI0305/MI0305T003/</a> Assessed 2024-02-22.