Environmental Product Declaration





In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

Ultipro Finbetong

from

Saint-Gobain Building Distribution (SGDS)



Program: The International EPD® System, <u>www.environdec.com</u>

Program operator: EPD International AB

EPD registration number: S-P-08193
Publication date: 2023-02-21
Valid until: 2028-02-20

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com







General information

Program information

Program:	The International EPD® System							
	EPD International AB							
Address:	Box 210 60							
Addicas.	SE-100 31 Stockholm							
	Sweden							
Website:	www.environdec.com							
E-mail:	info@environdec.com							
CEN standard EN 15804:201	2 +A2 (2019) serves as the Core Product Category Rules (PCR)							
• • • • • •): PCR 2019:14-c-PCR-001 Cement and building lime (EN 16908) (2022-nstruction products (EN 15804:A2) (1.2.5)							
PCR review was conducted Claudia A. Peña. Contact via	by: The Technical Committee of the International EPD® System. Chair: info@environdec.com							
Independent third-party verific ☐ EPD process certification	cation of the declaration and data, according to ISO 14025:2006: ☑ EPD verification							
Third-party verifier: Vladimir I	Third-party verifier: Vladimir Koci, vladimir.koci@lcastudio.cz							
The procedure for follow-up of	of data during EPD validity involves third party verifier:							
□ Yes ⊠ No								

The EPD owner has sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. EPDs made according to EN15804+A1, and EN15804+A2 are not comparable, especially since a majority of the environmental indicators are based on different versions. For further information about comparability, see EN 15804 and ISO 14025.





Company information

Owner of the EPD	Saint-Gobain Distribution Sweden
Contact	SGDS - Beriar Maroof (beriar.maroof@sgdsgruppen.se) Optimera - Henrik Björk (henrik.bjork@optimera.se)
Description of the organisation	SGDS Gruppen - specialists in collaboration for more efficient business in construction and installation. SGDS Gruppen AB is the head company of some of Sweden's leading trading companies in construction, sheet metal, tiles and installation. All the companies have a long and solid industry experience and provide most of Sweden's craftsmen with materials for various projects. Customers in different companies can also buy support items from the sister companies in the group, and in selected cases, we take joint projects to facilitate the logistics of the supply of goods, which is then often critical for a smooth construction project. • Optimera - construction trade for professional carpenters • Dahl – heat, plumbing and sanitary specialist • Bevego - building sheet metal, ventilation and technical insulation • Kakelspecialisten and Konradsson's Tiles - tiles, tiling and bathroom fittings The company's focus is on sales and services, with direct contact with about 150,000 customers regularly. Saint-Gobain Distribution Sweden group (SGDS) is owned by Saint-Gobain with a presence in 64 countries and over 190 000 employees worldwide.
Name and location of production site	Riksten, Sweden








Product information

Product name	Ultipro Finbetong
Product identification	Dry concrete
	The EPD is a specific EPD for this product and not an average
Product description	Ultipro Finbetong is a dry concrete product. It is concrete for most types of casting work. High viscous consistency provides compressive strength class C32/40. When mixed with water, 1 kg of dry concrete product makes approximately 1.1kg of solid concrete.
UN CPC code	37440 – Portland cement, aluminous cement, slag cement and similar hydraulic cements, except in the form of clinkers.
Use	Ultipro Finbetong is used for most types of casting works. It is sold across the Nordic region.

LCA information

Functional unit	1 kg of dry concrete mix.
Reference service life	50 years
Database(s) and LCA software used	Calculation completed in GaBi v10.6.2.9 with an integrated Ecoinvent database 3.8
System boundaries	Cradle to grave and module D (A + B + C + D).

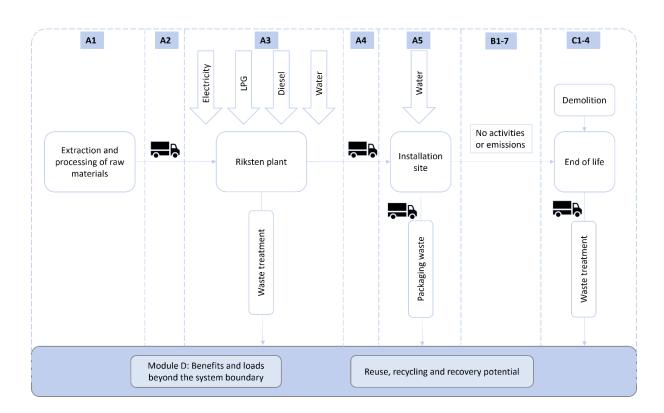





The factory purchases the raw materials from a range of locations. The majority of the material is sand which is mined near to the factory. The transport from suppliers to Sweden has been accounted for in A2, and the transport to the Optimera stores in A4.

The end of life reflects the Nordic market, where 75% of mineral waste from construction and demolition is landfilled, 7% incinerated with energy recovery and 17% recycled. For the credit for recovered electricity and heat (module D), EU datasets were used.

Modules declared

X = modules included

	Product stage				mbly ige		Use stage					End of life stage			ge	Benefits & loads beyond system boundary	
	Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery- Recycling-potential
	A1	A2	АЗ	A4	A5	B1	B2	ВЗ	B4	B5	В6	В7	C1	C2	СЗ	C4	D
Declared	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ	Χ
Geography	EU	SE	SE	SE	SE	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU
Specific data used	Fact spec for A	ific da	ata														
Variation- Products		0 %															
Variation- Sites		0 %															

Data

Generic database data was used for the production of raw materials, energy, transportation, packaging and end-of-life. Specific data was collected from the factory.

Time representativeness

The site-specific data used for the product manufacturing corresponds to 2021. The age of data from generic databases varies mainly from 2017 – 2021. The incineration of inert material (2006) was older than this. It has a negligible impact on all core indicators except ozone depletion potential. It was investigated, but no better datasets could be obtained.

Data quality

All datasets used came from reputable database GaBi and Ecoinvent, with good technological representativeness and which represents either Sweden or EU28 average. Therefore, it could be considered good.





Allocation

No co-product allocation has been applied since no co-products are generated, and therefore allocation has not been relevant.

Cut-off criteria

The general rules for the exclusion of inputs and outputs follow the requirements in EN 15804.

Content declaration

Content

For confidentiality reasons the precise specification is not given here but was used in the calculations.

Content declaration	Amount weight %	Comment
Sand	75 – 100 %	Dry weight
Portland Cement	10 – 20 %	

No substances that appear in the REACH candidate list of SVHC (Candidate List of Substances of Very High Concern) are present or used in the product concerning this EPD.

Packaging

Content declaration	Weight % vs product
Polyethylene film	0.4 %
Wooden pallet	2.6 %

Information on biogenic carbon content

Biogenic carbon content	Unit per FU	Amount
Biogenic carbon content in the product	kg C	0
Biogenic carbon content in packaging	kg C	1.08 E-02

¹ kg biogenic carbon is equivalent to 44/12 kg CO2.

Information on energy content

Energy content	Unit per FU	Amount
Energy content in the product	MJ	0





Environmental Information

Potential environmental impact – indicators according to EN 15804+A2

	Results per functional unit: 1 kg											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D		
GWP-total	kg CO2 eq	1.63E-01	3.01E-02	7.78E-03	0	7.00E-04	3.16E-02	7.99E-03	1.19E-02	-5.52E-03		
GWP-fossil	kg CO2 eq	2.06E-01	3.00E-02	7.35E-03	0	7.33E-04	3.15E-02	7.17E-03	1.23E-02	-5.94E-03		
GWP-biogenic	kg CO2 eq	-4.28E-02	-4.12E-05	4.23E-04	0	-3.77E-05	-4.32E-05	8.05E-04	-3.63E-04	4.22E-04		
GWP-luluc	kg CO2 eq	6.72E-05	1.66E-04	2.39E-07	0	4.76E-06	1.74E-04	1.35E-05	2.26E-05	-3.17E-06		
ODP	kg CFC-11 eq	2.75E-13	1.79E-15	2.08E-15	0	6.93E-17	1.87E-15	1.65E-10	2.88E-14	-1.76E-14		
AP	mole H+ eq	4.26E-04	5.59E-05	1.17E-06	0	3.55E-06	5.88E-05	3.04E-05	8.70E-05	-6.91E-06		
EP-freshwater	kg P eq	1.13E-07	8.90E-08	3.76E-09	0	2.52E-09	9.34E-08	9.05E-09	2.08E-08	9.24E-11		
EP-marine	kg N eq	1.42E-04	2.33E-05	3.43E-07	0	1.66E-06	2.45E-05	1.45E-05	2.22E-05	-2.36E-06		
EP-terrestrial	mole N eq	1.55E-03	2.65E-04	4.98E-06	0	1.84E-05	2.78E-04	1.59E-04	2.44E-04	-2.72E-05		
POCP	kg NMVOC eq	4.20E-04	5.01E-05	9.23E-07	0	4.64E-06	5.27E-05	3.89E-05	6.76E-05	-7.14E-06		
ADP-minerals & metals	kg Sb eq	1.01E-08	2.49E-09	9.22E-11	0	7.11E-11	2.62E-09	3.24E-09	1.26E-09	-5.11E-10		
ADP-fossil	MJ	1.60E+00	3.98E-01	9.61E-03	0	9.26E-03	4.18E-01	1.04E-01	1.61E-01	-1.01E-01		
WDP	m3	7.60E-03	2.67E-04	1.32E-03	0	7.90E-06	2.81E-04	9.66E-03	1.34E-03	-3.43E-04		
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of putrients reaching freshwater and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment; EP-marine = Eutrophication potential, fraction of putrients reaching marine and compartment.											





Use of resources

	Results per functional unit: 1 kg											
Indicator	Unit	A1-A3	A4	A 5	В	C1	C2	C3	C4	D		
PERE	MJ	2.42E-01	2.26E-02	6.63E-03	0	6.42E-04	2.38E-02	2.70E-03	2.41E-02	1.42E-02		
PERM	MJ	5.41E-01	0	0	0	0	0	0	0	0		
PERT	MJ	7.83E-01	2.26E-02	6.63E-03	0	6.42E-04	2.38E-02	2.70E-03	2.41E-02	1.42E-02		
PENRE	MJ	1.42E+00	3.99E-01	9.61E-03	0	9.30E-03	4.19E-01	1.05E-01	1.61E-01	-1.01E-01		
PENRM	MJ	1.84E-01	0	0	0	0	0	0	0	0		
PENRT	MJ	1.60E+00	3.99E-01	9.61E-03	0	9.30E-03	4.19E-01	1.05E-01	1.61E-01	-1.01E-01		
SM	kg	0	0	0	0	0	0	0	0	0		
RSF	MJ	0	0	0	0	0	0	0	0	0		
NRSF	MJ	0	0	0	0	0	0	0	0	0		
FW	m3	4.73E-04	2.56E-05	1.56E-04	0	7.42E-07	2.69E-05	2.28E-04	4.08E-05	2.49E-05		
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources.											

Additional voluntary indicators

	Results per functional unit: 1 kg											
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D		
GWP-GHG	kg CO2 eq	1.61E-01	2.94E-02	7.75E-03	0	6.82E-04	3.09E-02	7.60E-03	1.16E-02	-5.37E-03		
EP	kg PO4 eq	4.93E-05	9.00E-06	1.93E-07	0	5.87E-07	9.46E-06	5.03E-06	7.73E-06	-8.61E-07		
Acronyms	cronyms GWP-GHG global warming potential - greenhouse gases; EP eutrophication potential											

These indicators support comparability with EPDs based on the previous version of EN 15804 (EN 15804:2012+A1:2013).





Waste and output flows

Waste

Results per functional unit: 1 kg										
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
HWD	kg	1.22E-10	1.91E-12	4.17E-13	0	4.92E-14	2.01E-12	7.16E-13	8.26E-12	-1.60E-11
NHWD	kg	5.70E-02	5.72E-05	7.43E-04	0	1.52E-06	6.01E-05	1.52E-05	8.23E-01	-7.62E-07
RWD	kg	4.70E-05	4.92E-07	2.63E-06	0	1.73E-08	5.16E-07	3.44E-06	1.79E-06	1.09E-05
Acronyms HW Hazardous waste disposed; NHW Non-hazardous waste disposed; RW Radioactive waste disposed										

Output flows

Results per functional unit: 1 kg										
Indicator	Unit	A1-A3	A4	A5	В	C1	C2	C3	C4	D
CRU	kg	2.60E-03	0	0	0	0	0	0	0	0
MFR	kg	0	0	9.02E-04	0	0	0	1.86E-01	0	0
MER	kg	0	0	0	0	0	0	7.67E-02	0	0
EEE	MJ	0	0	0	0	0	0	0	0	0
EET	MJ	0	0	0	0	0	0	0	0	0
Acronyms	Acronyms CRU Components for reuse; MR Materials for recycling; MER Materials for energy recovery; EEE Exported electric energy; ETE Exported thermal energy									

Disclaimers

ILCD classification	Indicator	Disclaimer	
ILCD Type 1	Global warming potential (GWP)	None	
	Depletion potential of the stratospheric ozone layer (ODP)	None	
	Potential incidence of disease due to PM emissions (PM)	None	
	Acidification potential, Accumulated Exceedance (AP)	None	
	Eutrophication potential, Fraction of nutrients reaching	None	
	freshwater end compartment (EP-freshwater)		
	Eutrophication potential, Fraction of nutrients reaching	None	
ILCD Type 2	marine end compartment (EP-marine)		
	Eutrophication potential, Accumulated Exceedance		
	(EP-terrestrial)	None	
	Formation potential of tropospheric ozone (POCP)	None	
	Potential Human exposure efficiency relative to U235 (IRP)	1	
	Abiotic depletion potential for non-fossil resources (ADP-minerals&metals)	2	
	Abiotic depletion potential for fossil resources (ADP-fossil)	2	
	Water (user) deprivation potential, deprivation-weighted	2	
ILCD Type 3	water consumption (WDP)		
	Potential Comparative Toxic Unit for ecosystems (ETP-fw)	2	
	Potential Comparative Toxic Unit for humans (HTP-c)	2	
	Potential Comparative Toxic Unit for humans (HTP-nc)	2	
	Potential Soil quality index (SQP)	2	

Disclaimer 1 – This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator.

Disclaimer 2 – The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator.

References

Construction and Demolition Recycling Association	https://www.cdrecycling.org/materials/concrete/ Accessed 2022-07-20
cPCR-001 (2022)	PCR 2019:14-c-PCR-001 Cement and building lime (EN 16908) (2022-05-18)
EN 15804:2012+A2	Sustainability of construction works – Environmental product declaration – Core rules for the product category of constructions products
EPD International (2021)	General Programme Instructions of the International EPD® System, version 4.0
Eurostat (2022)	Treatment of waste by waste category, hazardousness and waste management operations. Accessed 2022-12-06 https://ec.europa.eu/eurostat/databrowser/view/ENV_WASTRT_custom3926986/default/table?lang=en
ISO 14025:2006	International Standard ISO 14025 – Environmental labels and declarations — Type III environmental declarations — Principles and procedures



ISO 14040:2006 International Standard ISO 14040: Environmental Management – Life

cycle assessment - Principles and framework. Second edition 2006-07-

01.

ISO 14044:2006 International Standard ISO 14044: Environmental Management – Life

cycle assessment - Requirements and Guidelines.

Material Properties https://material-properties.org/diesel-fuel-density-melting-point-thermal-

conductivity/ Accessed 2022-07-13

Nearby Engineers (2019) https://www.ny-engineers.com/blog/recycling-and-reusing-concrete

Accessed 2022-07-20

PCR 2019:14 PCR 2019:14. v1.1. Construction products (EN 15804:A2) (1.2.5)

Contact information

EPD owner:	SGDS GRUPPEN DAHL// /OPTIMERA/ Email: tks@sgdsgruppen.com Telephone: +46 20-583000 Address: SGDS gruppen AB, Bryggerivägen 9, 168 67 Bromma
LCA author:	Amy Stockwell Email: Amy.Stockwell@eando.se Telephone: +44 7746 175762 Address: Eando AB, Tåstrupsgatan 2, SE-262 63 Ängelholm, Sweden
Third party verifier:	LCA Studio Vladimír Kocí Email: <u>vladimir.koci@lcastudio.cz</u> Telephone: +420 608 055 972 Address: LCA Studio, Šárecká 1962/5, 160 00 Praha 6
Program operator:	EPD International AB info@environdec.com

