


Condensate valves, reduced bore

172 series, female threads / female threads, DN 15-50, reduced bore


Body	DN 15-50 Steel, P235GH (1.0345)
Ball	DN 15-50 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-50 PTFE+GF
Stem	DN 15-50 Stainless steel, X8CrNiS18-9 (1.4305)
Stem seal	DN 15-50 FFKM/EPDM
Operation	DN 15-50 With zinc-plated steel handle



Operation conditions
DN 15-150: -20 °C – +250 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
*) Not for superheated steam
Leakage rate A (EN 12266-1)

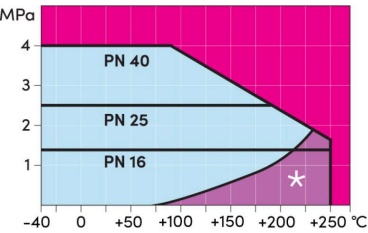

DN 15-50

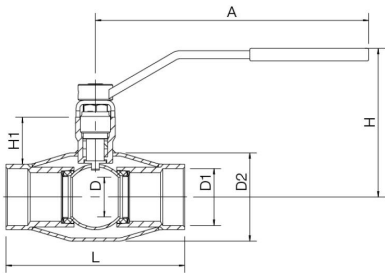

DN	PN	Product no.	A	D	D1	D2	H	H1	L	kg
15	40	172015X	147	10	Rp 1/2	33.7	116	31	85	0.5
20	40	172020X	147	15	Rp 3/4	42.4	120	32	100	0.7
25	40	172025X	147	20	Rp 1	48.3	122	31	115	0.8
32	40	172032X	147	25	Rp 1 1/4	60.8	126	30	130	1.2
40	40	172040X	147	32	Rp 1 1/2	70.0	131	32	150	1.5
50	40	172050X	147	40	Rp 2	76.1	138	32	180	2.1