

Condensate valves, reduced bore

173 series, flange / flange, DN 15-150, reduced bore


Body	DN 15-150 Steel, P235GH (1.0345)
Ball	DN 15-150 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-150 PTFE+GF
Stem	DN 15-100 Stainless steel, X8CrNiS18-9 (1.4305) DN 125-150 Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 15-150 FFKM/EPDM
Operation	DN 15-150 With zinc-plated steel handle
Flanges	EN 1092-1 Available PN 10, 16, 25, 40




Operation conditions

DN 15-150: -20 °C – +250 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C

*) Not for superheated steam
Leakage rate A (EN 12266-1)

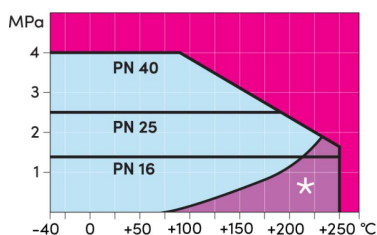

DN 15-250

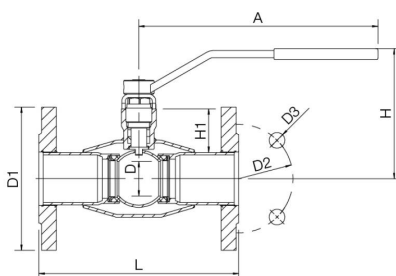

DN	PN	Product no.	A	D	D1	D2	D3	H	H1	L	kg
15	40	173015X	147	10	95.0	65.0	14.0	116	33	130	1.8
20	40	173020X	147	15	105.0	75.0	14.0	120	34	150	2.5
25	40	173025X	147	20	115.0	85.0	14.0	122	33	160	3.0
32	40	173032X	147	25	140.0	100.0	18.0	126	32	180	4.6
40	40	173040X	147	32	150.0	110.0	18.0	131	34	200	5.1
50	40	173050X	147	40	165.0	125.0	18.0	138	35	230	6.8
65	25	173065/25	278	50	185.0	145.0	18.0	156	62	270	10.0
80	25	173080/25	278	65	200.0	160.0	18.0	168	68	280	13.0
100	25	173100/25	278	80	235.0	190.0	22.0	218	101	300	20.2
125	25	173125/25	400	100	270.0	220.0	26.0	253	101	325	30.0
150	25	173150/25	600	125	300.0	250.0	26.0	272	107	350	39.0