


Condensate valves, reduced bore

170 series, welding / welding, EN (DIN), DN 15-150, reduced bore


Body	DN 15-150 Steel, P235GH (1.0345)
Ball	DN 15-150 Stainless steel, X5CrNi18-10 (1.4301)
Ball seal	DN 15-150 PTFE+GF
Stem	DN 15-100 Stainless steel, X8CrNiS18-9 (1.4305) DN 125-150 Stainless steel, X17CrNi16-2 (1.4057)
Stem seal	DN 15-150 FFKM/EPDM
Operation	DN 15-150 With zinc-plated steel handle



Operation conditions
DN 15–150: -20 °C – +250 °C
Below -20 °C contact manufacturer
Lowest allowed ambient temperature -40 °C
*) Not for superheated steam
Leakage rate A (EN 12266-1)

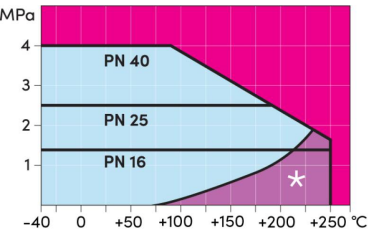

DN 15-150

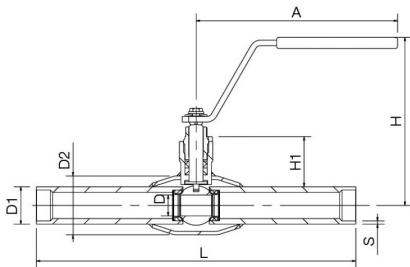

DN	PN	Product no.	A	D	D1	D2	H	H1	L	S	kg
15	40	170015X	147	10	21.3	33.7	116	33	230	2,0	0.7
20	40	170020X	147	15	26.9	42.4	120	34	230	2,3	0.9
25	40	170025X	147	20	33.7	48.3	122	33	230	2,6	1.0
32	40	170032X	147	25	42.4	60.3	126	32	260	2,6	1.4
40	40	170040X	147	32	48.3	70.0	131	34	260	2,6	1.6
50	40	170050X	147	40	60.3	76.1	138	35	300	2,9	2.2
65	25	170065	278	50	76.1	101.6	156	62	300	2,9	3.9
80	25	170080	278	65	88.9	121.0	169	68	300	3,2	5.1
100	25	170100	278	80	114.3	146.0	218	100	325	3,6	8.5
125	25	170125	400	100	139.7	177.8	253	101	325	4	15.2
150	25	170150	600	125	168.3	219.1	272	107	350	4,5	20.4