

Merjeno od nosilca
Measured from support

1300⁺³⁰₀

250^{±20}

3

138^{±2}
53^{±1}

BLOWING
AIRFLOW DIRECTION
SMER ZRAKA

DETAJL A:

DETAJL A:
1:1

Rob rotorja in
rob elise ventilatorja
morata biti poravnana

20


Ø 90
4xM6/90°

Hidria FOR
NORDICOLD

R11E-4SLPB-6M2-5120
0311-4-0317
1~230V 50HZ
130/110W 0.57/0.50A
890/800RPM C=5uF/450V
INS.CL.F TH.PROT IP44
MADE IN SLOVENIA DATE

CE

- navodila za kontrolo ventilatorja 0301-1-4671
- checking instruction 0301-1-4671
- v vsako škatlo priložiti priključno shemo 0301-1-0014
- in each box connection diagram has to be added 0301-1-0014

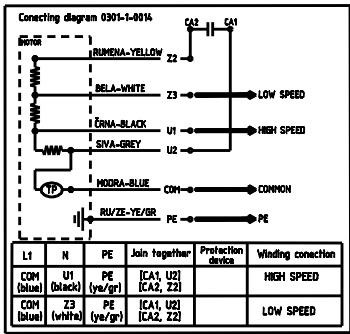

Hidria
Hidria Rotomatika

ISO 2768-m

2:5 / A3

ST.	ST.SPR.	DATUM	PODPIS
3	174/10	14-Jun-2010	Uroš K.
2	002/09	12-Jan-2009	Uroš K.
1	304/08	03-Nov-2008	Uroš K.
ST.	ST.SPR.	DATUM	PODPIS

MATERIAL	NAZIVA TITLE:
VENTILATOR R11E-4SLPB-6M2-5120	
KODA: CODE:	VERZIJA: REV:
0311-4-0317	0311-4-0317
LIST: SHEET:	1
DR: OP:	1