


KIT-50PK4ZH5 (S-5010PK4E + U-50PZH3E5)

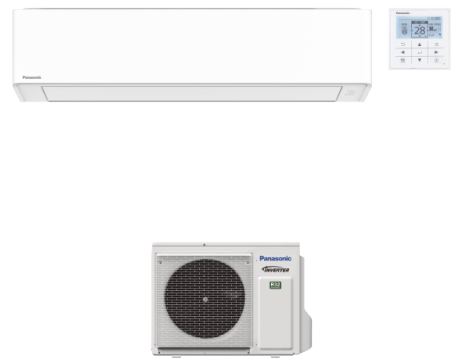

PACi NX Series Elite väggmonterad - PK4 - R32		
		5.0 kW
Input power heating (Min)	kW	0,22
Outdoor dimension (Width)	mm	875
Outdoor air flow (Heat)	m³/min	42,0
Outdoor air flow (Cool)	m³/min	42,0
nanoe X Generator		Mark 3
Moisture removal volume	L/h	1,6
Input power heating (Max)	kW	2,10
Outdoor dimension (Depth)	mm	320
COP (Max) (1)	W/W	5,45
COP (Min) (1)	W/W	3,10
Heating capacity (Max)	kW	6,5
Heating capacity (Min)	kW	1,2
Input power cooling (Max)	kW	1,85
Input power cooling (Min)	kW	0,22
EER (Max) (1)	W/W	5,45
EER (Min) (1)	W/W	3,03
Cooling capacity (Max)	kW	5,6
Current in heating (1p 220V / 3p 380)	A	6,60
Indoor sound pressure (Lo) (5)	dB(A)	31
Indoor sound pressure (Med) (5)	dB(A)	36
Indoor sound pressure (Hi) (5)	dB(A)	41
Indoor air flow (Lo)	m³/min	12,0
Indoor air flow (Med)	m³/min	15,5
Indoor air flow (Hi)	m³/min	17,0
Indoor sound power (Lo)	dB(A)	47
Indoor sound power (Med)	dB(A)	52
Current in heating (1p 240V / 3p 415)	A	6,05
Current in heating (1p 230V / 3p 400)	A	6,30
Cooling capacity (Min)	kW	1,2
Current in cooling (1p 240V / 3p 415)	A	5,30
Current in cooling (1p 230V / 3p 400)	A	5,55
Current in cooling (1p 220V / 3p 380)	A	5,80
Remote controller		CZ-RTC5B
Outdoor sound power (Heat -Hi)	dB(A)	67
Outdoor sound power (Cool -Hi)	dB(A)	64
Outdoor sound pressure (Heat -Hi)	dB(A)	48
Outdoor sound pressure (Cool -Hi)	dB(A)	46
Elevation difference (in/out) (8)	m	15 / 30
Indoor net weight	kg	14
Input power heating (Nominal)	kW	1,39
Pdesign at -10°C	kW	4,5
SCOP (2)		4,6 A++
Annual energy consumption heating (3)	kWh/a	1.369
Annual energy consumption cooling (3)	kWh/a	219
Input power cooling (Nominal)	kW	1,22
Pdesign (cooling)	kW	5,0
SEER (2)		8,0 A++
Outdoor net weight	kg	42
Outdoor dimension (Height)	mm	695

PACi NX Series Elite väggmonterad - PK4 - R32		
		5.0 kW
Operating range (Cool - Min)	°C	-15
Indoor dimension (Height)	mm	295
Pipe length range	m	3 ~ 40
Pipe diameter (Liquid)	Inch (mm)	1/4 (6,35) (6)
Operating range (Heat - Max)	°C	+24
Operating range (Heat - Min)	°C	-20
Operating range (Cool - Max)	°C	+46
Outdoor unit		U-50PZH3E5
Indoor unit		S-5010PK4E
Kit		KIT-50PK4ZH5
Additional gas amount	g/m	1,13 / 0,76
Pipe length for additional gas	m	30
Pipe diameter (Gas)	Inch (mm)	1/2 (12,70) (7)
Indoor dimension (Depth)	mm	249
Indoor dimension (Width)	mm	1.060
Refrigerant (R32) / CO2 Eq.	kg / T	15
Indoor sound power (Hi)	dB(A)	57
EER (Nominal) (1)	W/W	4,10
COP (Nominal) (1)	W/W	4,03
Outdoor power source	V	220 - 230 - 240
Heating capacity (Nominal)	kW	5,6
Cooling capacity (Nominal)	kW	5,0

Kompletterande produkter

