

Single Pack HTK80AA 220-240V 50Hz RSIR

Single pack code number: **195B4674**

Position	Title	Code	Amount
1	Compressor HTK80AA	16128600	1
2	Terminal board 4.8mm	15164300	1
3	Screw for cable clamp	10636000	1
4	Screw for cable clamp	10636200	1
5	Cable clamp	11341000	1
6	Cover	10636401	1
7	Earth screw	10641201	1
8	Clip	10633900	4
9	Steel pin	10634100	4
10	Washer	10634300	4
11	Rubber grommet 16mm	11322600	4

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • www.secop.com

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

Model			
Designation	HTK80AA	220-240V/50Hz 1~	Sales code: 16128600

Compressor design

Oil type	Mineral	Refrigerant(s)	R600a
Oil viscosity	5cST	Displacement	8,1cm³ / 0,49cu.in
Oil quantity	162cm³ / 5,5fl.oz	Compressors on pallet	100
Refr. charge - tech. limit	150g / 5,3oz		
Free gas volume comp.	1500cm³ / 50,7fl.oz		
Weight	7,9kg / 17,4lbs		
Motor protection	external		
Winding resistance main	25,8Ω (at 25°C)		
Winding resistance aux	16,3Ω (at 25°C)		
Max. winding temp.	130°C / 266°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations with HTK80AA

	Conf. 1	Conf. 2
Motorconfiguration	RSIR	RSCR
Power supply (nominal)	220-240V/50Hz	220-240V/50Hz
Number of phases	1	1
Voltage range	187-264V	187-264V
Approvals	VDE	VDE
Starting torque	LST	LST
Note	Various options of connectors are possible - please contact SECOP-Sales.	

Applications with HTK80AA

	Conf. 1	Conf. 2
Refrigerant	R600a	R600a
Application	LBP	LBP
System cooling	static	static
Hot gas defrost	-/-	-/-
Long interval pull down	-/-	-/-


Electrical data - Configurations with HTK80AA

	Conf. 1	Conf. 2
Starting device type	PTC	PTC
Run capacitor	-/-	3µF
Start capacitor	-/-	-/-
LRA (locked rotor amps / 4s/ U(N))		
RLA (rated load amps / 1s/ U(N))	-/-A	-/-A
Cut in current (U(N))		


Model			
Designation	HTK80AA	220-240V/50Hz 1~	Sales code: 16128600

Compressor dimensions

Housing	A Height	174mm / 6,85in	
	B Height	167mm / 6,57in	
	C Length shell	194mm / 7,64in	
	D Length w. cover	238mm / 9,37in	
	E Width	151mm / 5,94in	
Connectors	Suction	Discharge	Process
	X	Y	Z
Diameter [mm]	øi 6,16-6,24	øi 5,1-5,2	øi 6,11-6,29
(i:inside, o:outside) [in]	øi 0,24-0,25	øi 0,2-0,2	øi 0,24-0,25
Material	copper	copper	copper
Horizontal angle ±2°	54°	35°	45°
Vertical angle ±2°	35°	40°	35°
Position l/h/w [mm]	120/92/57	112/106/81	-86/94/72
[in]	4,7/3,6/2,2	4,4/4,2/3,2	-3,4/3,7/2,8
Straight tube l. [mm]	14	14	14
	[in] 0,5	0,5	0,5

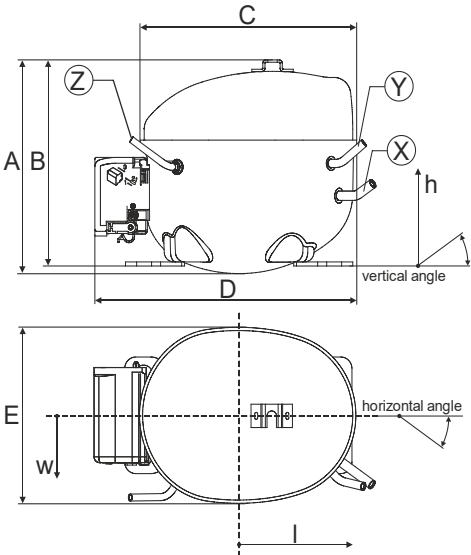

Compressor fixation

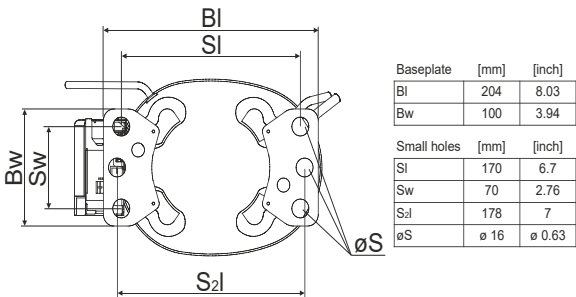

Mounting accessories

- '4ZN' with rubber grommet
- '4ZN' with rubber grommet and sleeve for M6
- Bolt joint kit
- '4ZN' with Snap on kit

- order code
- 772N
- 768N
- 4ZN + 118-1917 (18)
- 776N


Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor


Housing with dip-tray fixture (omega bracket).

Various options of connectors are possible - please contact SECOP-Sales.


Bolt joint



Snap-on




Model				
Designation	HTK80AA	220-240V/50Hz	Conf. 1	Sales code: 16128600

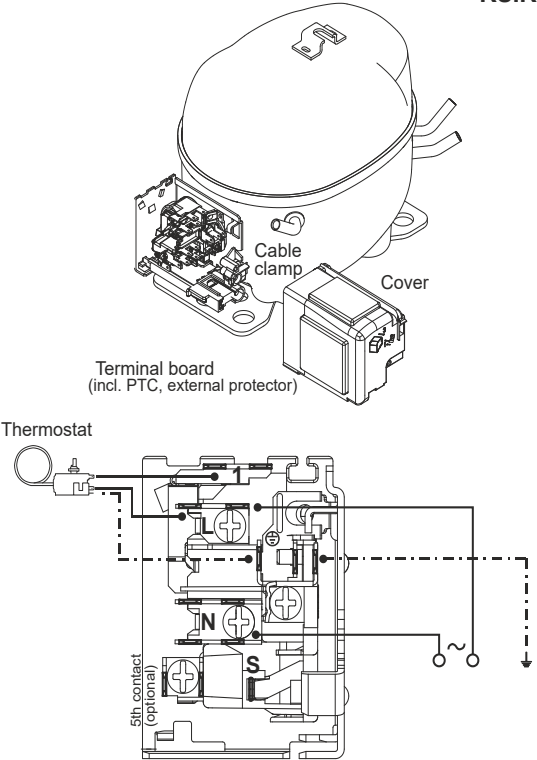Configuration	Electrical accessories / wiring diagram			
Motorconfiguration	RSIR			
Power supply (nominal)	220-240V/50Hz 1~			
Refrigerant	R600a			
Application	LBP			
Voltage range	187-264V			
Starting torque	LST			
Approvals	VDE			

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	static

Operation pressure range

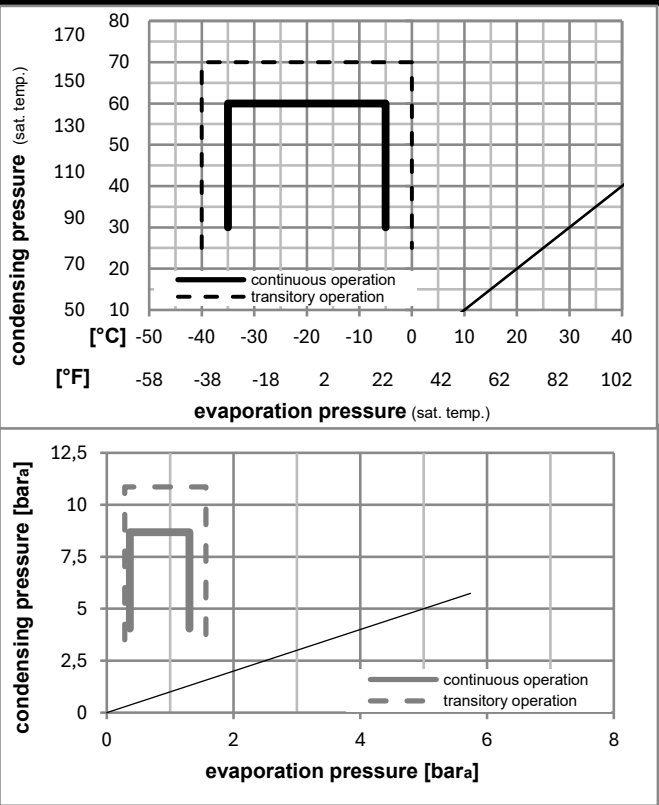

Components		
. terminal board (PTC, 4.8mm)	15164300	
b cover terminal board	10636401	
. cable clamp	11341000	
. screw - uni6954	10636000	
. screw - uni6954	10636200	
. screw uni en iso 4757	10641201	

Alternative components		
. terminal board (PTC, 6.3mm)	15162300	

Model											
Designation	HTK80AA	220-240V/50Hz	Conf. 1	Sales code:	16128600						

Optimization + standard conditions

R600a, 220V/50Hz, RSIR, static, VDE

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption			
					Return gas temp.						Current consumption			
					Liquid temp.						Ref. mass flow			
					Cooling capacity			COP	EER	P1			I	m
	pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]	
[°C]	-23	54	32	32	136,1	465	117,2	1,61	5,50	1,39	84,5	0,53	1,46	ASHRAE LBP
[°F]	-10	130	90	90										
[°C]	-25	55	32	55	101,8	348	87,6	1,25	4,28	1,08	81,2	0,51	1,33	cecomaf LBP
[°F]	-13	131	90	131										
[°C]	-35	40	20	40	64,7	221	55,7	1,06	3,64	0,92	60,8	0,42	0,79	EN12900 LBP
[°F]	-31	104	68	104										
[°C]	-23	49	4,4	49	110,4	377	95,0	1,36	4,66	1,17	80,9	0,52	1,61	ARI540 LBP
[°F]	-10	120	40	120										
[°C]	-23	41	32	32	145,1	496	124,9	1,92	6,56	1,65	75,5	0,49	1,56	AHAM LBP
[°F]	-10	105	90	90										
[°C]	-35	45	32	45	62,9	215	54,1	1,03	3,51	0,88	61,3	0,42	0,75	opt
[°F]	-31	113	90	113										


Performance tables

R600a, 220V/50Hz, RSIR, static, VDE

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-35	-31	62,9	215	54,1	1,03	3,51	0,88	61,3	0,42	0,75
cond. pressure	-30	-22	87,5	299	75,3	1,28	4,39	1,11	68,1	0,46	1,04
pc= 45/113	-25	-13	117,3	400	100,9	1,55	5,29	1,33	75,7	0,49	1,40
return gas temp.	-23	-10	128,6	439	110,6	1,64	5,60	1,41	78,4	0,51	1,53
RGT= 32/90	-20	-4	152,1	520	130,9	1,82	6,21	1,56	83,7	0,53	1,81
liquid temp	-15	5	192,1	656	165,3	2,09	7,13	1,80	92,0	0,56	2,30
Tliq= 45/113	-5	23	287,1	981	247,1	2,64	9,02	2,27	108,7	0,64	3,45
[°C / °F]	-35	-31	54,9	188	47,3	0,90	3,07	0,77	61,1	0,39	0,71
cond. pressure	-30	-22	75,7	258	65,1	1,07	3,65	0,92	70,8	0,46	0,99
pc= 55/131	-25	-13	101,8	348	87,6	1,25	4,28	1,08	81,2	0,51	1,33
return gas temp	-23	-10	111,9	382	96,3	1,32	4,50	1,13	84,9	0,53	1,46
RGT= 32/90	-20	-4	133,3	455	114,7	1,44	4,93	1,24	92,2	0,56	1,74
liquid temp	-15	5	170,0	581	146,3	1,64	5,61	1,41	103,6	0,61	2,23
Tliq= 55/131	-5	23	259,4	886	223,2	2,05	7,00	1,76	126,6	0,70	3,41


Model				
Designation	HTK80AA	220-240V/50Hz	Conf. 2	Sales code: 16128600

Configuration		Electrical accessories / wiring diagram		
Motorconfiguration	RSCR	RSCR		
Power supply (nominal)	220-240V/50Hz 1~			
Refrigerant	R600a			
Application	LBP			
Voltage range	187-264V			
Starting torque	LST			
Approvals	VDE			

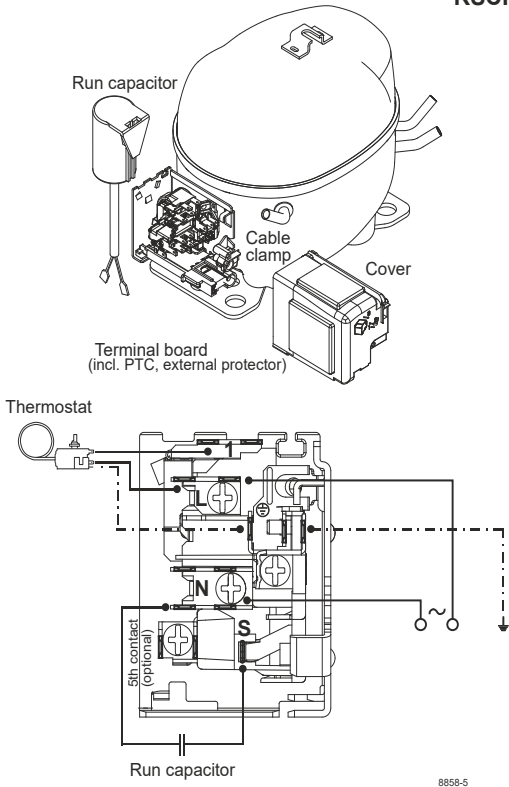

Ambient/ machine room temperatures minimum /maximum	
Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	static

Operation pressure range

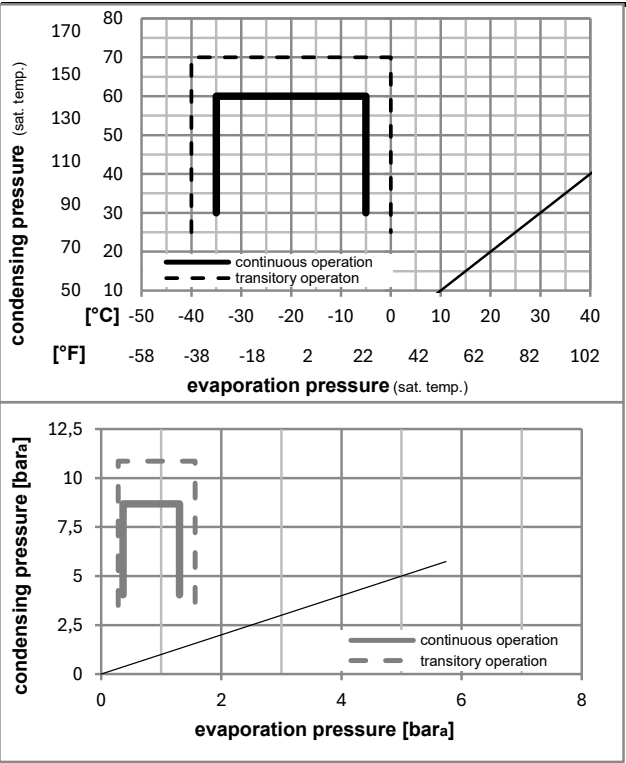

Components		
.	terminal board (PTC, 4.8mm)	15164300
.	run capacitor (3μF, 4.8mm)	10692902
b	cover terminal board	10636401
.	cable clamp	11341000
.	screw - uni6954	10636000
.	screw - uni6954	10636200
Alternative components		
.	screw uni en iso 4757	10641201

Model													
Designation	HTK80AA	220-240V/50Hz	Conf. 2	Sales code:	16128600								

Optimization + standard conditions


R600a, 220V/50Hz, RSCR, static, VDE

Evaporating pressure (saturation temperature) Condensing pressure (saturation temperature) Return gas temp. Liquid temp. Cooling capacity COP EER Power consumption Current consumption Ref. mass flow													
	pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	P1	I	m
[°C]	-23	54	32	32	136,1	465	117,2	1,66	5,66	1,43	82,1	0,39	1,46
[°F]	-10	130	90	90									
ASHRAE LBP													
[°C]	-25	55	32	55	101,8	348	87,6	1,29	4,41	1,11	78,9	0,38	1,33
[°F]	-13	131	90	131									
cecomaf LBP													
[°C]	-35	40	20	40	64,7	221	55,7	1,09	3,73	0,94	59,2	0,32	0,79
[°F]	-31	104	68	104									
EN12900 LBP													
[°C]	-23	49	4,4	49	110,4	377	95,0	1,40	4,79	1,21	78,6	0,39	1,61
[°F]	-10	120	40	120									
ARI540 LBP													
[°C]	-23	41	32	32	145,1	496	124,9	1,97	6,72	1,69	73,7	0,38	1,56
[°F]	-10	105	90	90									
AHAM LBP													
[°C]	-35	45	32	45	62,9	215	54,1	1,06	3,61	0,91	59,5	0,32	0,75
[°F]	-31	113	90	113									
opt													

Performance tables

R600a, 220V/50Hz, RSCR, static, VDE


	pe		Cooling capacity			COP		EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]		[W]	[A]	[kg/h]
[°C / °F]	-35	-31	62,9	215	54,1	1,06	3,61	0,91		59,5	0,32	0,75
cond. pressure	-30	-22	87,5	299	75,3	1,32	4,51	1,14		66,3	0,35	1,04
pc= 45/113	-25	-13	117,3	400	100,9	1,59	5,43	1,37		73,7	0,37	1,40
return gas temp.	-23	-10	128,6	439	110,6	1,68	5,75	1,45		76,3	0,38	1,53
RGT= 32/90	-20	-4	152,1	520	130,9	1,87	6,37	1,61		81,5	0,40	1,81
liquid temp	-15	5	192,1	656	165,3	2,14	7,32	1,84		89,7	0,43	2,30
Tliq= 45/113	-5	23	287,1	981	247,1	2,70	9,22	2,32		106,4	0,50	3,45
[°C / °F]	-35	-31	54,9	188	47,3	0,93	3,18	0,80		59,1	0,31	0,71
cond. pressure	-30	-22	75,7	258	65,1	1,10	3,76	0,95		68,7	0,34	0,99
pc= 55/131	-25	-13	101,8	348	87,6	1,29	4,41	1,11		78,9	0,38	1,33
return gas temp	-23	-10	111,9	382	96,3	1,36	4,63	1,17		82,5	0,39	1,46
RGT= 32/90	-20	-4	133,3	455	114,7	1,49	5,08	1,28		89,6	0,41	1,74
liquid temp	-15	5	170,0	581	146,3	1,69	5,76	1,45		100,8	0,45	2,23
Tliq= 55/131	-5	23	259,4	886	223,2	2,10	7,16	1,80		123,7	0,53	3,41

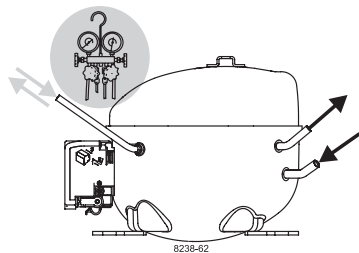


K-Series Compressors


GTK, HKK, HMK, HTK, HXK, HZK

SECCP

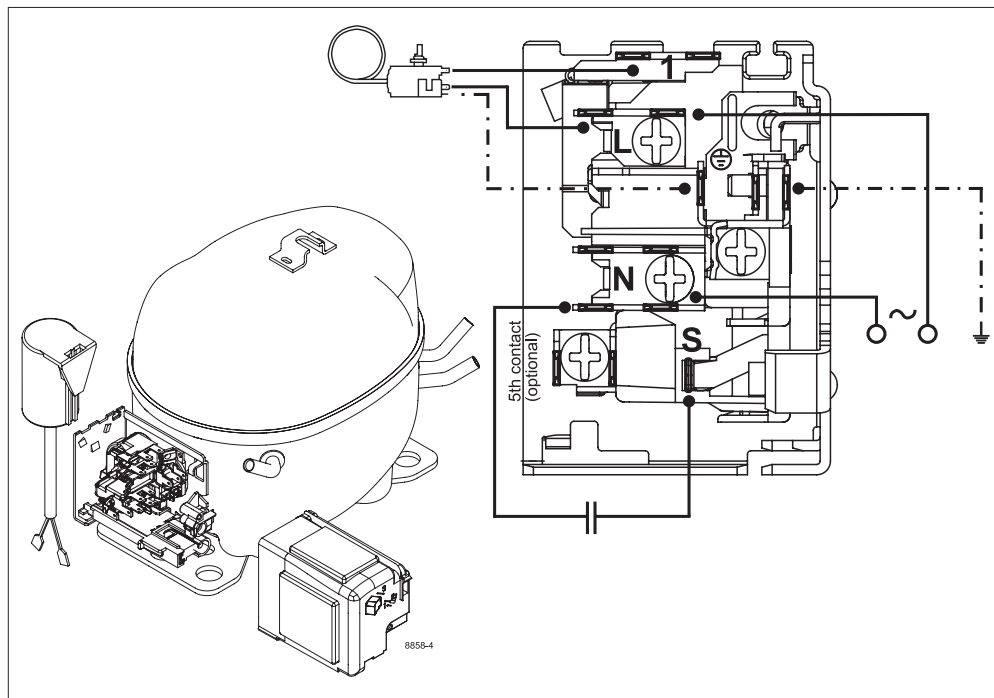

Service/Repair – R600a

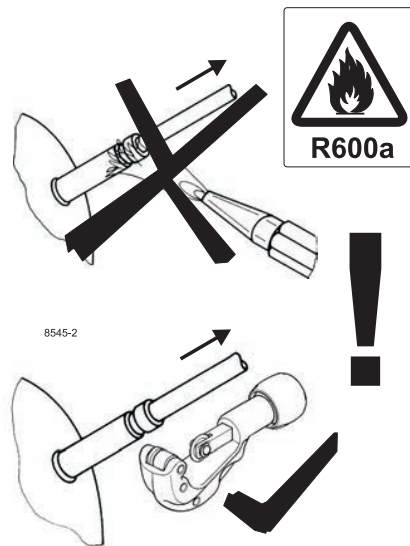


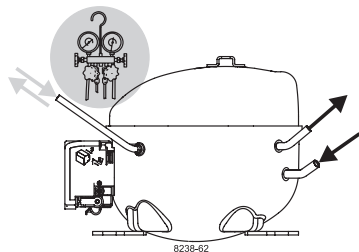


K-Series Compressors

GTK, HKK, HMK, HTK, HXK, HZK

SECOP

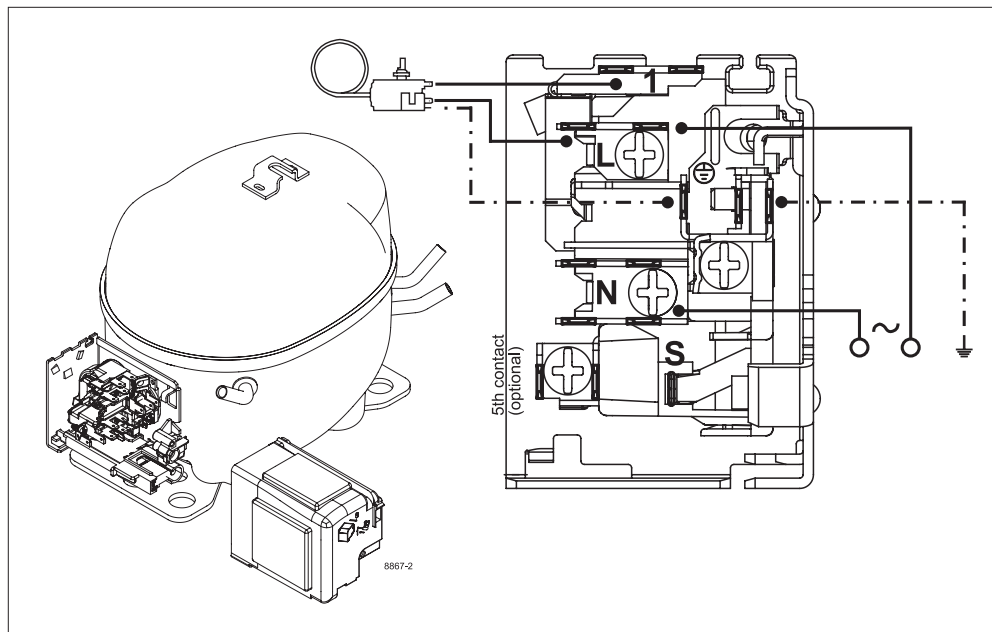

Service/Repair – R600a

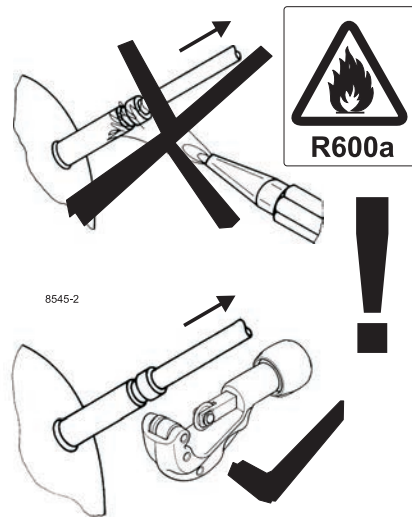

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com