

Single Pack HTK55AA 220-240V 50Hz RSIR

Single pack code number: **195B4677**

Position	Title	Code	Amount
1	Compressor HTK55AA	16128200	1
2	Terminal board 4.8mm	15165700	1
3	Screw for cable clamp	10636000	1
4	Screw for cable clamp	10636200	1
5	Cable clamp	11341000	1
6	Cover	10636401	1
7	Earth screw	10641201	1
8	Clip	10633900	4
9	Steel pin	10634100	4
10	Washer	10634300	4
11	Rubber grommet 16mm	11322600	4

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • www.secop.com

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

Model			
Designation	HTK55AA	220-240V/50Hz 1~	Sales code: 16128200

Compressor design

Oil type	Mineral	Refrigerant(s)	R600a
Oil viscosity	5cST	Displacement	5,6cm³ / 0,34cu.in
Oil quantity	162cm³ / 5,5fl.oz	Compressors on pallet	100
Refr. charge - tech. limit	150g / 5,3oz		
Free gas volume comp.	1500cm³ / 50,7fl.oz		
Weight	7,8kg / 17,2lbs		
Motor protection	external		
Winding resistance main	32,7Ω (at 25°C)		
Winding resistance aux	29,2Ω (at 25°C)		
Max. winding temp.	130°C / 266°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations with HTK55AA

	Conf. 1	Conf. 2
Motorconfiguration	RSIR	RSCR
Power supply (nominal)	220-240V/50Hz	220-240V/50Hz
Number of phases	1	1
Voltage range	187-264V	187-264V
Approvals	VDE	VDE
Starting torque	LST	LST
Note	Various options of connectors are possible - please contact SECOP-Sales.	

Applications with HTK55AA

	Conf. 1	Conf. 2
Refrigerant	R600a	R600a
Application	LBP	LBP
System cooling	static	static
Hot gas defrost	-/-	-/-
Long interval pull down	-/-	-/-


Electrical data - Configurations with HTK55AA

	Conf. 1	Conf. 2
Starting device type	PTC	PTC
Run capacitor	-/-	2,5µF
Start capacitor	-/-	-/-
LRA (locked rotor amps / 4s/ U(N))		
RLA (rated load amps / 1s/ U(N))	-/-A	-/-A
Cut in current (U(N))		


Model			
Designation	HTK55AA	220-240V/50Hz 1~	Sales code: 16128200

Compressor dimensions

Housing	A Height	174mm / 6,85in	
	B Height	167mm / 6,57in	
	C Length shell	194mm / 7,64in	
	D Length w. cover	238mm / 9,37in	
	E Width	151mm / 5,94in	
Connectors	Suction	Discharge	Process
	X	Y	Z
Diameter [mm]	øi 6,16-6,24	øi 5,1-5,2	øi 6,11-6,29
(i:inside, o:outside) [in]	øi 0,24-0,25	øi 0,2-0,2	øi 0,24-0,25
Material	copper	copper	copper
Horizontal angle ±2°	54°	35°	45°
Vertical angle ±2°	35°	40°	35°
Position l/h/w [mm]	120/92/57	112/106/81	-86/94/72
[in]	4,7/3,6/2,2	4,4/4,2/3,2	-3,4/3,7/2,8
Straight tube l. [mm]	14	14	14
	[in] 0,5	0,5	0,5

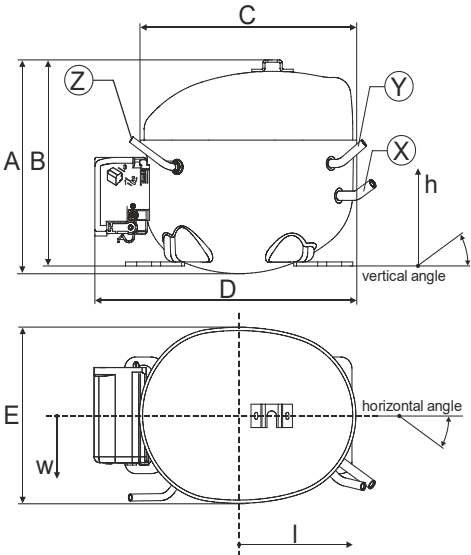

Compressor fixation

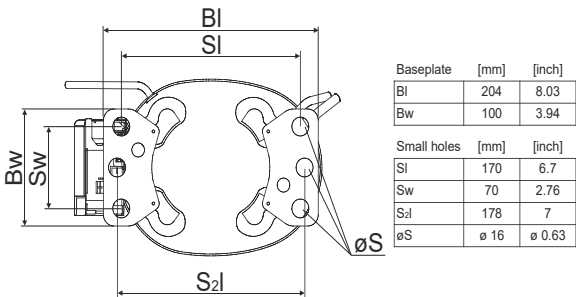


Mounting accessories


- '4ZN' with rubber grommet
- '4ZN' with rubber grommet and sleeve for M6
- Bolt joint kit
- '4ZN' with Snap on kit

- order code
- 772N
- 768N
- 4ZN + 118-1917 (18)
- 776N

Bolt joint



Snap-on





Application notes

Provision for PE Grounding is located at the PE Stamp on the compressor

Housing with dip-tray fixture (omega bracket).

Various options of connectors are possible - please contact SECOP-Sales.


Model				
Designation	HTK55AA	220-240V/50Hz	Conf. 1	Sales code: 16128200

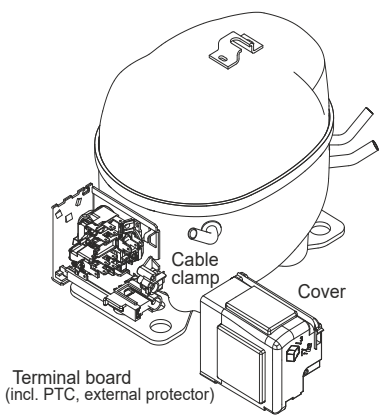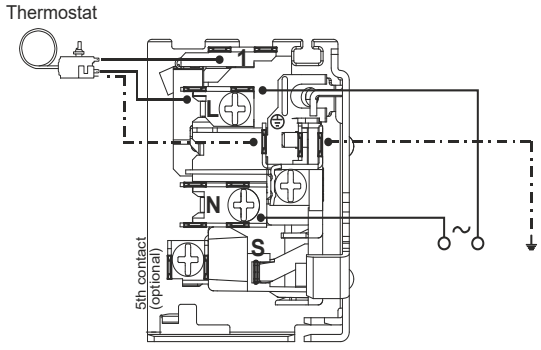Configuration	Electrical accessories / wiring diagram			
Motorconfiguration	RSIR			
Power supply (nominal)	220-240V/50Hz 1~			
Refrigerant	R600a			
Application	LBP			
Voltage range	187-264V			
Starting torque	LST			
Approvals	VDE			

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	static

Operation pressure range

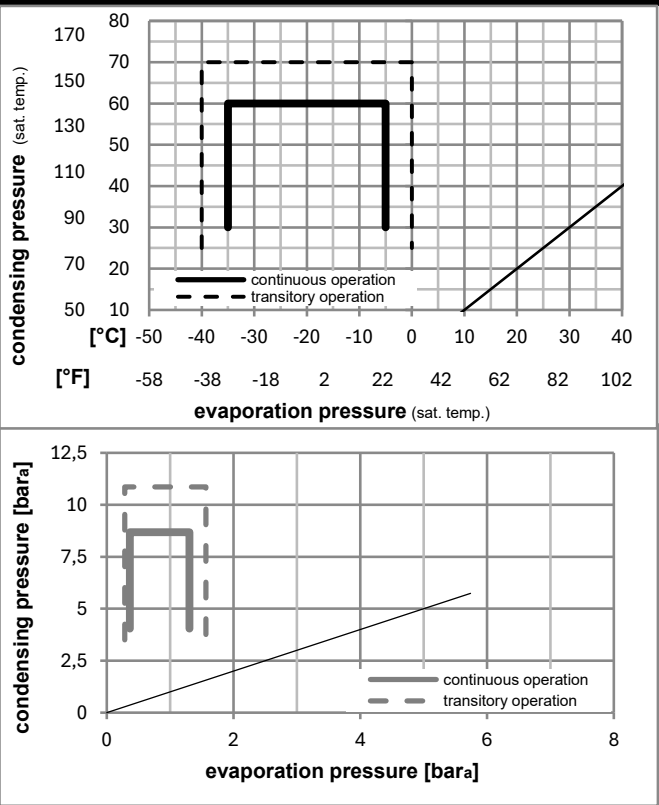

Components		
.	terminal board (PTC, 4.8mm)	15165700
b	cover terminal board	10636401
.	cable clamp	11341000
.	screw - uni6954	10636000
.	screw - uni6954	10636200
.	screw uni en iso 4757	10641201

Model											
Designation	HTK55AA	220-240V/50Hz	Conf. 1	Sales code:	16128200						

Optimization + standard conditions

R600a, 220V/50Hz, RSIR, static, VDE

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption																			
Return gas temp.					Current consumption						Ref. mass flow																			
Liquid temp.					Cooling capacity						COP				EER				P1				I				m			
pe		pc		RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]																
[°C]	-23	54	32	32																										
[°F]	-10	130	90	90	93,0	318	80,0	1,55	5,29	1,33	60,0	0,40	1,00	ASHRAE LBP																
[°C]	-25	55	32	55																										
[°F]	-13	131	90	131	68,7	235	59,1	1,20	4,09	1,03	57,3	0,39	0,90	cecomaf LBP																
[°C]	-35	40	20	40																										
[°F]	-31	104	68	104	41,0	140	35,3	1,02	3,50	0,88	40,0	0,33	0,50	EN12900 LBP																
[°C]	-23	49	4,4	49																										
[°F]	-10	120	40	120	76,7	262	66,0	1,31	4,48	1,13	58,5	0,39	1,12	ARI540 LBP																
[°C]	-23	41	32	32																										
[°F]	-10	105	90	90	103,0	352	88,7	1,82	6,23	1,57	56,5	0,38	1,11	AHAM LBP																
[°C]	-35	45	32	45																										
[°F]	-31	113	90	113	38,8	133	33,4	0,97	3,30	0,83	40,2	0,32	0,46	opt																

Performance tables

R600a, 220V/50Hz, RSIR, static, VDE

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-35	-31	38,8	133	33,4	0,97	3,30	0,83	40,2	0,32	0,46
cond. pressure	-30	-22	58,9	201	50,7	1,23	4,19	1,06	48,0	0,35	0,70
pc= 45/113	-25	-13	81,9	280	70,5	1,48	5,06	1,27	55,3	0,38	0,97
return gas temp.	-23	-10	90,4	309	77,8	1,57	5,35	1,35	57,7	0,39	1,08
RGT= 32/90	-20	-4	107,9	369	92,9	1,73	5,92	1,49	62,3	0,41	1,29
liquid temp	-15	5	137,2	468	118,1	1,99	6,78	1,71	69,1	0,44	1,64
Tliq= 45/113	-5	23	205,9	703	177,2	2,50	8,53	2,15	82,4	0,50	2,47
[°C / °F]	-35	-31	31,7	108	27,2	0,80	2,73	0,69	39,7	0,31	0,41
cond. pressure	-30	-22	48,5	166	41,8	1,00	3,42	0,86	48,5	0,35	0,63
pc= 55/131	-25	-13	68,7	235	59,1	1,20	4,09	1,03	57,3	0,39	0,90
return gas temp	-23	-10	76,3	261	65,7	1,27	4,32	1,09	60,3	0,40	1,00
RGT= 32/90	-20	-4	92,3	315	79,4	1,40	4,77	1,20	66,1	0,42	1,21
liquid temp	-15	5	119,5	408	102,8	1,59	5,44	1,37	75,0	0,46	1,56
Tliq= 55/131	-5	23	185,1	632	159,3	1,98	6,76	1,70	93,5	0,54	2,44

Model				
Designation	HTK55AA	220-240V/50Hz	Conf. 2	Sales code: 16128200


Configuration	Electrical accessories / wiring diagram			
Motorconfiguration	RSCR	RSCR		
Power supply (nominal)	220-240V/50Hz 1~			
Refrigerant	R600a			
Application	LBP			
Voltage range	187-264V			
Starting torque	LST			
Approvals	VDE			

Ambient/ machine room temperatures minimum /maximum


Ambient temperature range: 10 - 43°C / 50 - 110°F

Machine room temperature range: 10 - 48°C / 50 - 119°F

Compressor cooling: static

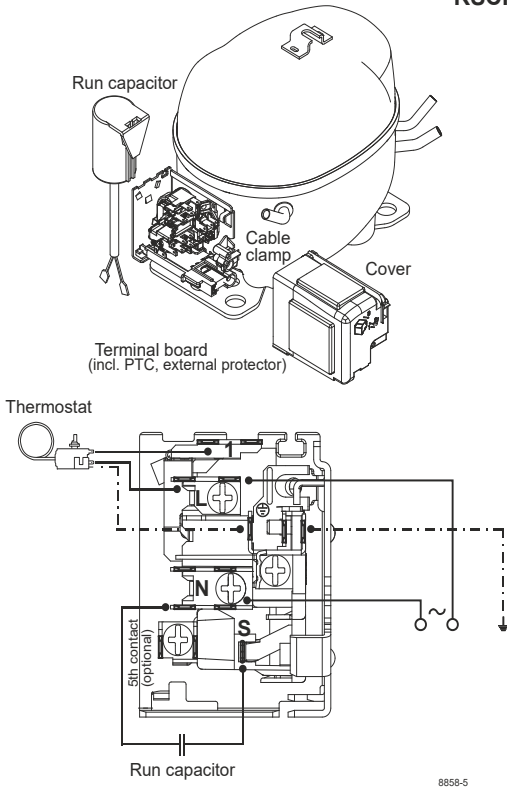

Operation pressure range

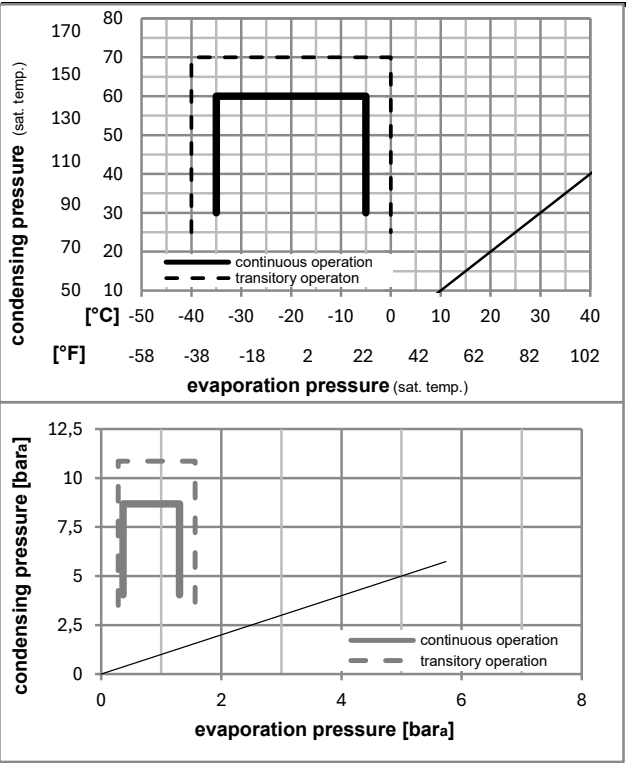

Components		
. terminal board (PTC, 4.8mm)	15165700	
. run capacitor (2,5µF, 4.8mm)	10692802	
b cover terminal board	10636401	
. cable clamp	11341000	
. screw - uni6954	10636000	
. screw - uni6954	10636200	

Alternative components		
. screw uni en iso 4757	10641201	

Model														
Designation	HTK55AA	220-240V/50Hz	Conf. 2	Sales code:	16128200									

Optimization + standard conditions


R600a, 220V/50Hz, RSCR, static, VDE

Evaporating pressure (saturation temperature) Condensing pressure (saturation temperature) Return gas temp. Liquid temp. Cooling capacity COP EER Power consumption Current consumption Ref. mass flow														
	pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	P1	I	m	
[°C]	-23	54	32	32	93,0	318	80,0	1,61	5,49	1,38	57,8	0,29	1,00	ASHRAE LBP
[°F]	-10	130	90	90										
[°C]	-25	55	32	55	68,7	235	59,1	1,25	4,25	1,07	55,2	0,28	0,90	cecomaf LBP
[°F]	-13	131	90	131										
[°C]	-35	40	20	40	41,0	140	35,3	1,08	3,68	0,93	38,0	0,24	0,50	EN12900 LBP
[°F]	-31	104	68	104										
[°C]	-23	49	4,4	49	76,7	262	66,0	1,36	4,63	1,17	56,6	0,29	1,12	ARI540 LBP
[°F]	-10	120	40	120										
[°C]	-23	41	32	32	103,0	352	88,7	1,88	6,42	1,62	54,8	0,28	1,11	AHAM LBP
[°F]	-10	105	90	90										
[°C]	-35	45	32	45	38,8	133	33,4	1,01	3,47	0,87	38,3	0,24	0,46	opt
[°F]	-31	113	90	113										

Performance tables

R600a, 220V/50Hz, RSCR, static, VDE


	pe		Cooling capacity			COP		EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]		[W]	[A]	[kg/h]
[°C / °F]	-35	-31	38,8	133	33,4	1,01	3,47	0,87		38,3	0,24	0,46
cond. pressure	-30	-22	58,9	201	50,7	1,28	4,36	1,10		46,1	0,26	0,70
pc= 45/113	-25	-13	81,9	280	70,5	1,53	5,23	1,32		53,5	0,28	0,97
return gas temp.	-23	-10	90,4	309	77,8	1,62	5,52	1,39		55,9	0,28	1,08
RGT= 32/90	-20	-4	107,9	369	92,9	1,79	6,10	1,54		60,5	0,30	1,29
liquid temp	-15	5	137,2	468	118,1	2,04	6,97	1,76		67,2	0,32	1,64
Tliq= 45/113	-5	23	205,9	703	177,2	2,55	8,70	2,19		80,8	0,37	2,47
[°C / °F]	-35	-31	31,7	108	27,2	0,84	2,85	0,72		37,9	0,23	0,41
cond. pressure	-30	-22	48,5	166	41,8	1,04	3,56	0,90		46,6	0,25	0,63
pc= 55/131	-25	-13	68,7	235	59,1	1,25	4,25	1,07		55,2	0,28	0,90
return gas temp	-23	-10	76,3	261	65,7	1,31	4,49	1,13		58,1	0,29	1,00
RGT= 32/90	-20	-4	92,3	315	79,4	1,45	4,95	1,25		63,7	0,31	1,21
liquid temp	-15	5	119,5	408	102,8	1,65	5,64	1,42		72,4	0,34	1,56
Tliq= 55/131	-5	23	185,1	632	159,3	2,04	6,96	1,75		90,9	0,39	2,44

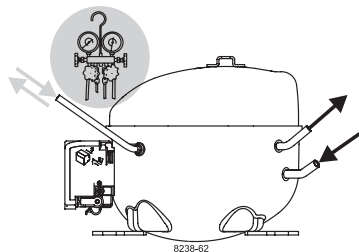


K-Series Compressors


GTK, HKK, HMK, HTK, HXK, HZK

SECCP

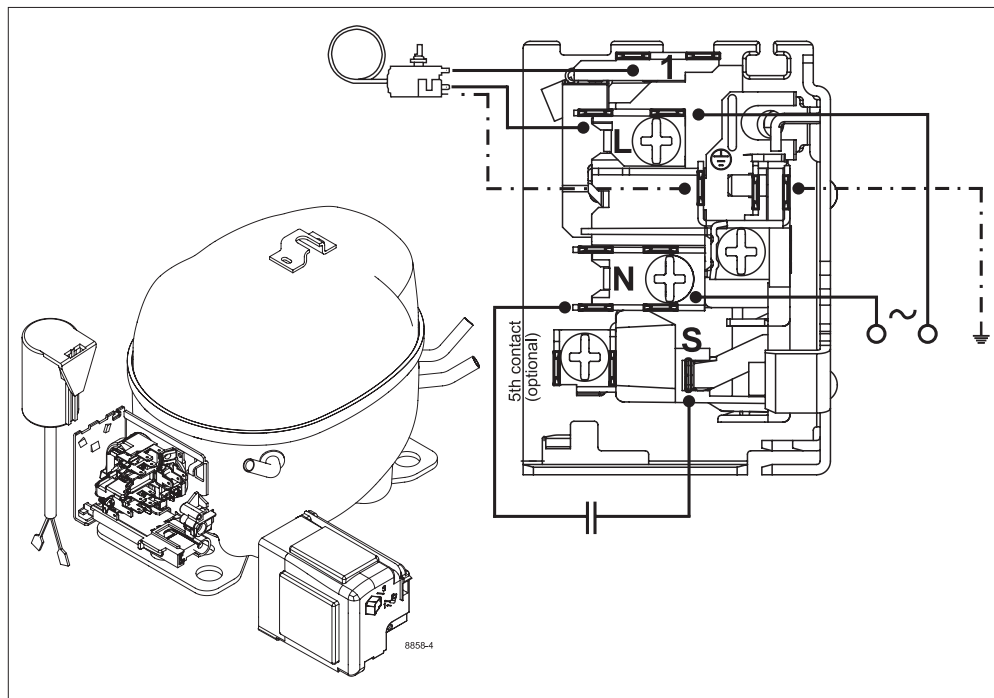

Service/Repair – R600a

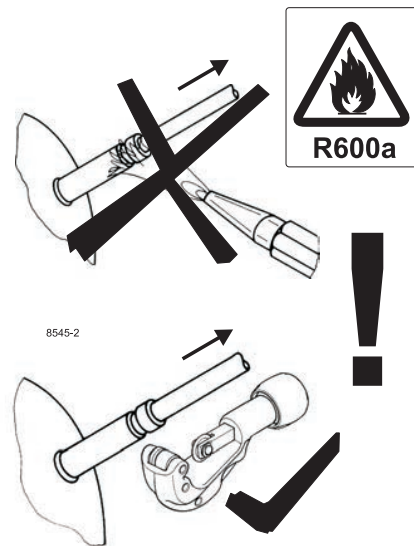


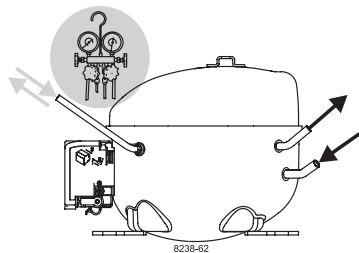


K-Series Compressors

GTK, HKK, HMK, HTK, HXK, HZK

SECOP

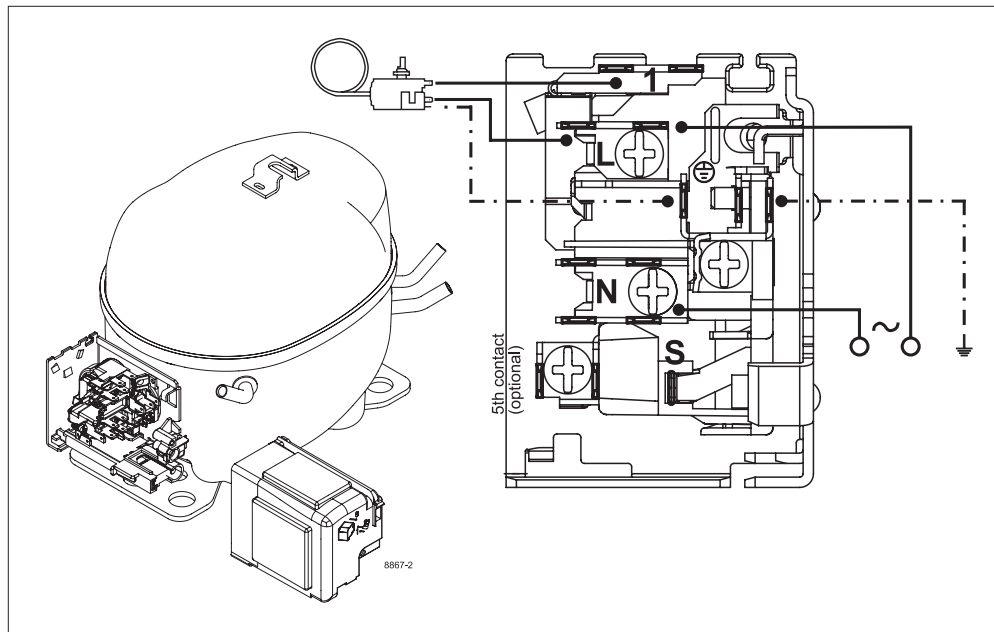

Service/Repair – R600a

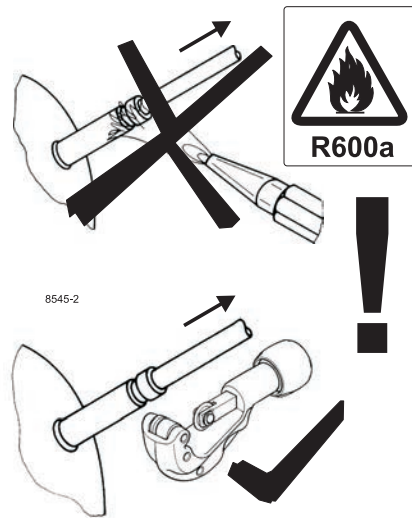

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com